
# Wheel Service Products •

Impact Sockets | Socket Sets | Wheel Torque Products Wheel Centering Products | Wheel & Rim Dismounting Tools Wheel Attaching Hardware | Tire & Wheel Service Tools



# 78 WHEEL SERVICE PRODUCTS // IMPACT SOCKETS

→ 1/2" DR Impact Socket Sets

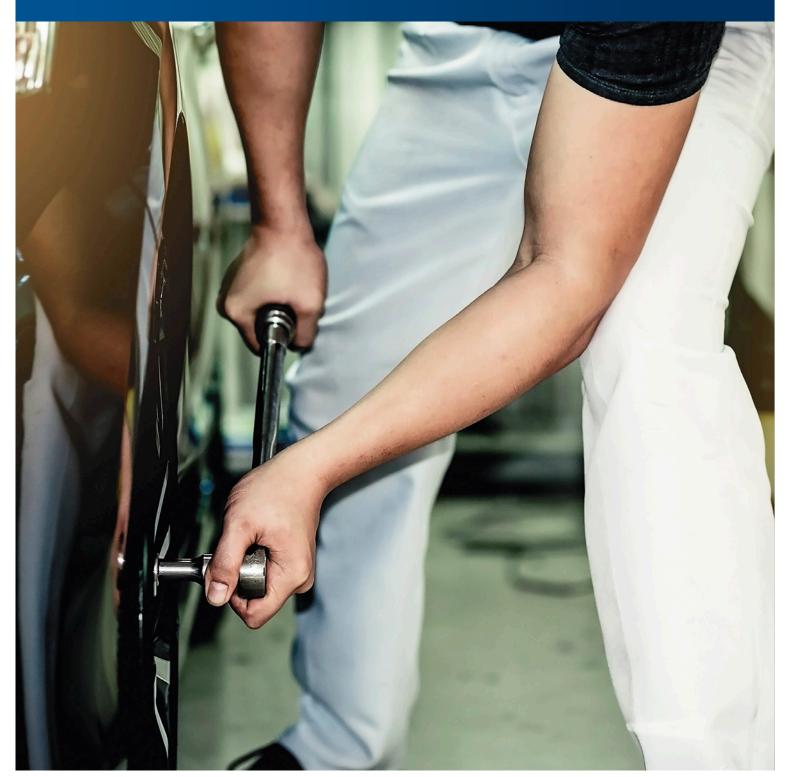

163-05153

# **Impact Socket Sets**



1/2" DR 13-PIECE DEEP SET ■ INCLUDES THE FOLLOWING SIZES: 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4" MFG. NO. DESCRIPTION ASCOT NO. 1/2" DR 163-01151 1151D 13-Piece Deep Set 163-01151

1/2" DR 14-PIECE METRIC STANDARD SET

INCLUDES THE FOLLOWING **SIZES: 10mm, 11mm, 12mm,** 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 26mm, 27mm

ASCOT NO. 163-01152

1152M

MFG. NO. DESCRIPTION 1/2" DR 14-Piece Metric Standard Set

#### 1/2" DR 14-PIECE METRIC DEEP SET

■ INCLUDES THE FOLLOWING SIZES: 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 26mm, 27mm

ASCOT NO. MFG. NO. DESCRIPTION 163-01153

1153MD

1/2" DR 14-Piece Metric Deep Set

163-01153

163-01152

Easier to identify and find right impact Socket with new & improved laser etching!

#### 1/2" DR 29-PIECE METRIC AND SAE 6 POINT DEEP **IMPACT SOCKET SET**

■ INCLUDES THE FOLLOWING **SIZES:** 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8" and 1-1/4" deep sockets ■ 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26 and 27mm deep sockets ■ 3/4" x 13/16" deep and 19mm x 21mm deep flip sockets

MFG. NO. DESCRIPTION ASCOT NO.

163-05153 1153DD

1/2" DR 29-Piece Metric and SAE 6 Point Deep Impact Socket Set

#### 1/2" DR 5-PIECE DEEP THIN WALL FLIP SET

■ INCLUDES THE FOLLOWING **SIZES:** 3/4" x 13/16", 19mm x 21mm, 7/8" x 15/16", 17mm x 19mm, 3" extension

DESCRIPTION ASCOT NO. MFG. NO.

1/2" DR 5-Piece Deep Thin Wall Flip Set 167-12050 1205D





1-1/4" Thin Wall Deep Sockets, 1-1/2" Budd Wheel Socket, 17mm & 21mm Square Socket, 33mm, 35mm & 41mm Deep Sockets

ASCOT NO. MFG. NO. DESCRIPTION 164-02110 3/4" DR 10-Piece

Truck Set

#### 3/4" DR 8-PIECE SAF DFFP SFT

INCLUDES THE FOLLOWING **SIZES:** 1". 1-1/16". 1-1/8". 1-1/4". 1-5/16", 1-3/8", 1-7/16", 1-1/2"

ASCOT NO. MFG. NO. DESCRIPTION

164-02181

2181D

3/4" DR 8-Piece SAE Deep Set



164-02110



# IMPACT SOCKETS // WHEEL SERVICE PRODUCTS 79



1/2" DR, 3/4" DR, 1" DR Impact Socket Sets

#### 3/4" DR 5-PIECE METRIC STANDARD TRUCK SET

INCLUDES THE FOLLOWING SIZES: 4 pts. budd wheel standard length, 17mm, 27mm,

ASCOT NO. 164-02185

30mm, 33mm, 35mm standard

MFG. NO. DESCRIPTION

2185M

3/4" DR 5-Piece Metric Standard Truck Set



164-04626

165-05626

1" DR 9-PIECE OTR & TRUCK SOCKET SET

■ INCLUDES THE FOLLOWING SIZES:

13/16" & 15/16" square, 33mm, 1-1/2", 1-5/8", 1-3/4", 1-7/8", 2" & 2-1/2" deep sockets

ASCOT NO. MFG. NO. DESCRIPTION

165-03119

3119 1" DR 9-Piece Large Truck Socket Set



#### 3/4" DR 4-PIECE BUDD WHEEL SOCKET SET

#### INCLUDES THE FOLLOWING

**SIZES:** 1-1/2" hex x 13/16' square budd wheel impact socket, 35mm x 17mm square budd wheel impact socket. 41mm x 21mm square budd wheel impact socket and 33mm deep

ASCOT NO.

MFG. NO. DESCRIPTION

**164-04626** 4626

3/4" DR 4-Piece Budd Wheel Socket Set

#### 1" DR 10-PIECE TRUCK SET

#### ■ INCLUDES THE FOLLOWING SIZES:

13/16" square, 1-1/16", 1-1/8", 1-1/4" thin wall deep, 1-1/2" deep with inside lip, 17mm & 21mm square with inside lip, 33mm, 35mm & 41mm deep

ASCOT NO. 165-03110

3110





#### 1" DR 5-PIECE BUDD WHEEL SOCKET SET

#### INCLUDES THE FOLLOWING

SIZES: 1-1/2" hex x 13/16" square budd wheel impact socket, 35mm x 17mm square budd wheel impact socket, 38mm x 20mm square budd wheel impact socket, 41mm x 21mm square budd wheel impact socket and 33mm deep impact socket

ASCOT NO.

MFG. NO. DESCRIPTION

**165-05626** 5626 1" DR 5-Piece Budd Wheel Socket Set

#### 1" DR 9-PIECE SAE TRUCK SET

■ INCLUDES THE FOLLOWING SIZES:

13/16", 4 points budd wheel standard length, 7/8", 15/16", 1", 1-3/16", 1-1/2" deep with inside lip, 1-1/16", 1-1/8", 1-1/4" thin wall deep

ASCOT NO. 165-03190 MFG. NO. DESCRIPTION 3190

1" DR 9-Piece

SAE Truck Set



#### 1" DR 7-PIECE METRIC TRUCK SET

#### ■ INCLUDES THE FOLLOWING SIZES: 17mm, 21mm, 4 pts. budd wheel

standard length, 27mm, 33mm, 36mm, 41mm deep

ASCOT NO. 165-03197

MFG. NO.

DESCRIPTION 3197M

1" DR 7-Piece Metric Truck Set









# **80 WHEEL SERVICE PRODUCTS //IMPACT SOCKETS**

1/2" DR, #5 Spline DR Impact Socket Sets & Twist Socket Set



### Impact Socket Sets (cont.)

#### #5 SPLINE DR 9-PIECE SAE TRUCK SET

■ INCLUDES THE FOLLOWING SIZES: 13/16", 4 points budd wheel standard length, 7/8". 15/16", 1", 1-3/16", 1-1/2" deep with inside lip, 1-1/16", 1-1/8", 1-1/4" thin wall deep



ASCOT NO.

MFG. NO. DESCRIPTION

166-04191

4191

#5 Spline DR 9-Piece SAE Truck Set

#### 1/2" DR 3-PIECE FLIP **IMPACT SOCKET SET**

■ CR-MO steel for long life ■ Fully guaranteed ■ Heavy duty blow mold case - CONTAINS THE FOLLOWING SIZES: 3/4" x 13/16" - 1246DT, 19mm x 21mm - 1291DT





167-12030

ASCOT NO. 167-12030

MFG. NO.

DESCRIPTION

1203D 1/2" Drive 3-Piece Flip Impact Socket Set

#### 4-PIECE IMPACT ADAPTER **SOCKET SET**

■ CR-MO steel for long life ■ Heavy duty blow mold case ■ CONTAINS THE FOLLOWING SIZES: 1/2" (F) x 3/4" (M) adapter, 3/4" (F) x 1" (M) adapter, 3/4" (F) x 1/2" (M) adapter, 1" (F) x 3/4" (M) adapter





169-01234

ASCOT NO.

MFG. NO. DESCRIPTION

1234A

169-01234

4-Piece Impact

#### 5-PIECE 1/2" DR TWIST SOCKET SET

Designed to easily remove damaged, rounded nuts ■ CR-MO steel for long life ■ Use with 1/2" drive impact wrench or breaker bar • Heavy duty blow molded case • INCLUDES: 17mm, 19mm, 21mm & 22mm twist sockets plus a 50mm extractor punch



ASCOT NO. 492-00502

MFG. NO. DESCRIPTION TSS5

5-Piece 1/2" Drive Twist Socket Set



# IMPACT SOCKETS // WHEEL SERVICE PRODUCTS 81



1/2" DR Impact Socket Sets, 1/2" DR Wheel Protector Socket Set

#### 1/2" DR MASTER 39-PIECE SAE IMPACT SOCKET SET

■ CR-MO alloy steel for long life ■ Fully guaranteed

■ Heavy duty blow mold case ■ 19 STANDARD **SOCKETS:** 3/8", 7/16", 1/2",9 /16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4", 1-5/16", 1-3/8", 1-7/16" and 1-1/2" • 19 DEEP SOCKETS: 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4", 1-5/16",



ASCOT NO.

MFG. NO. DESCRIPTION

163-02668

2668

1/2" DR Master 39-Piece SAE Impact Socket Set

#### 1/2" DR MASTER 39-PIECE METRIC IMPACT SOCKET SET

■ CR-MO alloy steel for long life ■ Fully guaranteed

■ Heavy duty blow mold case ■ 19 STANDARD

SOCKETS: 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm,16mm, 17mm, 18mm, 19mm, 20mm, 21mm, 22mm, 23mm, 24mm, 26mm, 27mm and 30mm ■ 19 DEEP **SOCKETS:** 9mm, 10mm, 11mm, 12mm, 13mm, 14mm,

15mm, 16mm, 17mm, 18mm, 19mm, 20mm, 21mm, 22mm, 23mm, 24mm, 26mm, 27mm and 30mm Universal Joint



ASCOT NO.

MFG. NO. DESCRIPTION

163-02669 2669 1/2" DR Master 39-Piece Metric Impact Socket Set

#### 1/2" DR EXTRA THIN WALL 9-PIECE SAE & METRIC WHEEL PROTECTOR SOCKET SET

■ Durable outer sleeve and insert protects high polished wheels and lug nuts from damage ■ CR-MO alloy steel for long life ■ Fully guaranteed ■ Heavy duty blow mold case INCLUDES 6 SAE SOCKETS: 3/4" (light green), 13/16" (purple), 7/8" (green), 15/16" (brown), 1" (silver) and 1-1/16" (black) • INCLUDES 3 METRIC **SOCKETS:** 17mm (blue), 19mm (yellow) and 21mm (red)







DESCRIPTION ASCOT NO. MFG. NO.

163-02849

2849

1/2" DR Extra Thin Wall 9-Piece SAE & Metric Wheel Protector Socket Set

#### RFPLACEMENT SOCKETS FOR 2849 SET

ASCOT NO.	MFG. NO.	DESCRIPTION
163-28492	28492	1/2"x3/4" Socket
163-28494	28494	1/2"x13/16" Socket
163-28496	28496	1/2"x7/8" Socket
163-28498	28498	1/2"x15/16" Socket
163-28910	284910	1/2"x1" Socket
163-28912	284912	1/2"x1-1/16" Socket
163-28917	284917	1/2"x17mm Socket
163-28919	284919	1/2"x19mm Socket
163-28921	284921	1/2"x21mm Socket



# WHEEL SERVICE PRODUCTS // IMPACT SOCKETS

• Individual Impact Sockets



# Individual Impact Sockets


	ASCOT NO.	MFG. NO.	DESCRIPTION			
			METRIC			
	163-10100	1010M	1/2" Drive x 10mm Std.			
	163-10111	1011M	1/2" Drive x 11mm Std.			
	163-10120	1012M	1/2" Drive x 12mm Std.			
	163-10130	1013M	1/2" Drive x 13mm Std.			
	163-10142	1014M	1/2" Drive x 14mm Std.			
	163-10150	1015M	1/2" Drive x 15mm Std.			
	163-10162	1016M	1/2" Drive x 16mm Std.			
δ	163-10170	1017M	1/2" Drive x 17mm Std.			
Ā	163-10182	1018M	1/2" Drive x 18mm Std.			
8	163-10190	1019M	1/2" Drive x 19mm Std.			
1/2" DR STANDARD IMPACT SOCKETS	163-10210	1021M	1/2" Drive x 21mm Std.			
ĕ	163-10221	1022M	1/2" Drive x 22mm Std			
Ξ	163-10262	1026M	1/2" Drive x 26mm Std.			
8	163-10270	1027M	1/2" Drive x 27mm Std.			
₫			SAE			
M	163-10140	1014	1/2" Drive x 7/16" Std.			
S	163-10160	1016	1/2" Drive x 1/2" Std.			
	163-10180	1018	1/2" Drive x 9/16" Std.			
1/2	163-10200	1020	1/2" Drive x 5/8" Std.			
	163-10220	1022	1/2" Drive x 11/16" Std.			
	163-10240	1024	1/2" Drive x 3/4" Std.			
	163-10260	1026	1/2" Drive x 13/16" Std.			
	163-10280	1028	1/2" Drive x 7/8" Std.			
	163-01030	1030	1/2" Drive x 15/16" Std.			
	163-10320	1032	1/2" Drive x 1" Std.			
	163-10340	1034	1/2" Drive x 1-1/16" Std.			
	163-10360	1036	1/2" Drive x 1-1/8" Std.			
	163-10400	1040	1/2" Drive x 1-1/4" Std.			

ASCOT NO.	MFG. NO.	DESCRIPTION		
		METRIC		
163-10172	1017MEDT	1/2" Drive x 17mm Extra Thin Wall		
163-10191	1019MEDT	1/2" Drive x 19mm Extra Thin Wall		
163-10211	1021MEDT	1/2" Drive x 21mm Extra Thin Wall		
163-10223	1022MEDT	1/2" Drive x 22mm Extra Thin Wall		
163-10230	1023MEDT	1/2" Drive x 23mm Extra Thin Wall		
		SAE		
163-10241	1024EDT	1/2" Drive x 3/4" Extra Thin Wall		
163-10261 1026ED		1/2" Drive x 13/16" Extra Thin Wall		
163-10282	1028EDT	1/2" Drive x 7/8" Extra Thin Wall		
	163-10172 163-10191 163-10211 163-10223 163-10230 163-10241 163-10261	163-10172 1017MEDT 163-10191 1019MEDT 163-10211 1021MEDT 163-10223 1022MEDT 163-10230 1023MEDT 163-10241 1024EDT 163-10261 1026EDT		

	ASCOT NO.	MFG. NO.	DESCRIPTION			
	METRIC					
	163-10101	1010MD	1/2" Drive x 10mm Deep			
	163-10121	1012MD	1/2" Drive x 12mm Deep			
	163-10131	1013MD	1/2" Drive x 13mm Deep			
	163-10143	1014MD	1/2" Drive x 14mm Deep			
	163-10151	1015MD	1/2" Drive x 15mm Deep			
	163-10163	1016MD	1/2" Drive x 16mm Deep			
	163-10171	1017MD	1/2" Drive x 17mm Deep			
	163-01018	1018MD	1/2" Drive x 18mm Deep			
	163-01019	1019MD	1/2" Drive x 19mm Deep			
	163-01021	1021MD	1/2" Drive x 21mm Deep			
vo	163-10222	1022MD	1/2" Drive x 22mm Deep			
	163-10263	1026MD	1/2" Drive x 26mm Deep			
Ď	163-10271	1027MD	1/2" Drive x 27mm Deep			
S ⊢	163-10283	1028MD	1/2" Drive x 28mm Deep			
AC	163-01032	1032MD	1/2" Drive x 32mm Deep			
Ξ	163-01033	1033MD	1/2" Drive x 33mm Deep			
1/2" DR DEEP IMPACT SOCKETS	SAE					
200	163-10141	1014D	1/2" Drive x 7/16" Deep			
Ä	163-10161	1016D	1/2" Drive x 1/2" Deep			
/2	163-10181	1018D	1/2" Drive x 9/16" Deep			
	163-10201	1020D	1/2" Drive x 5/8" Deep			
	163-01022	1022D	1/2" Drive x 11/16" Deep			
	163-01024	1024D	1/2" Drive x 3/4" Deep			
	163-01026	1026D	1/2" Drive x 13/16" Deep			
	163-10281	1028D	1/2" Drive x 7/8" Deep			
	163-10300	1030D	1/2" Drive x 15/16" Deep			
	163-11032	1032D	1/2" Drive x 1" Deep			
	163-01034	1034D	1/2" Drive x 1-1/16" Deep			
	163-01036	1036D	1/2" Drive x 1-1/8" Deep			
	163-10401	1040D	1/2" Drive x 1-1/4" Deep			
	163-01048	1048D	1/2" Drive x 1-1/2" Deep			
	163-15260	1526SD	1/2" Drive x 13/16" Square 8-Point			

	ASCOT NO.	MFG. NO.	DESCRIPTION		
S	METRIC				
	167-12110	1211D	1/2" Dr. x 11mm x 12mm Chrome Deep Flip		
Ď	167-12179	1271DT	1/2" Dr. x 17mm x 19mm Deep Thin Flip		
S	167-12910	1291	1/2" Dr. x 19mm x 21mm Std. Flip		
٦	167-12911	1291D	1/2" Dr. x 19mm x 21mm Deep Flip		
Σ	167-12912	1291DT	1/2" Dr. x 19mm x 21mm Deep Extra Thin Flip		
FLIP IMPACT SOCKETS			SAE		
ᄪ	167-12460	1246D	1/2" Dr. x 3/4" x 13/16" Deep Flip		
DR	167-12461	1246DT	1/2" Dr. x 3/4" x 13/16" Deep Extra Thin Flip		
1/2"	167-12490	1249D	1/2" Dr. x 7/8" x 15/16" Deep Flip		
	167-12510	1251D	1/2" Dr. x 1" x 1-1/16" Deep Flip		

Please contact us for further details regarding Individual Impact Sockets





# IMPACT SOCKETS // WHEEL SERVICE PRODUCTS 183



# • Individual Impact Sockets

	ASCOT NO.	MFG. NO.	DESCRIPTION			
	164-02017	2017MS	3/4" Drive x 17mm Square			
	164-02019	2019MS	3/4" Drive x 19mm Square			
	164-02020	2020MS	3/4" Drive x 20mm Square			
	164-02021	2021MS	3/4" Drive x 21mm Square			
	164-02024	2024D	3/4" Drive x 3/4" Deep			
	164-02026	2026S	3/4" Drive x 13/16" Square			
	164-02028	2028D	3/4" Drive x 7/8" Deep			
	164-02030	2030	3/4" Drive x 15/16" Std.			
	164-02032	2032D	3/4" Drive x 1" Deep			
	164-02033	2033MD	3/4" Drive x 33mm Deep			
	164-02034	2034DT	3/4" Drive x 1-1/16" Deep Thin Wall			
			METRIC			
	164-20270	2027M	3/4" Drive x 27mm Std.			
	164-20271	2027MD	3/4" Drive x 27mm Deep			
S	164-20301	2030M	3/4" Drive x 30mm Std.			
<u> </u>	164-20330	2033M	3/4" Drive x 33mm Std.			
Ŕ	164-02035	2035M	3/4" Drive x 35mm Std.			
S	164-20350	2035MD	3/4" Drive x 35mm Deep			
ΑĊ	164-20360	2036MD	3/4" Drive x 36mm Deep			
Ε	164-02041	2041MD	3/4" Drive x 41mm Deep			
3/4" DR IMPACT SOCKETS	SAE					
Ę.	164-20260	2026D	3/4" Drive x 13/16" Deep			
3,	164-20300	2030D	3/4" Drive x 15/16" Deep			
	164-02036	2036DT	3/4" Drive x 1-1/8" Deep Thin Wall			
	164-20401	2040D	3/4" Drive x 1-1/4" Deep			
	164-20402	2040DT	3/4" Drive x 1-1/4" Deep Thin Wall			
	164-02038	2038D	3/4" Drive x 1-3/16" Deep			
	164-02042	2042D	3/4" Drive x 1-5/16" Deep			
	164-02044	2044D	3/4" Drive x 1-3/8" Deep			
	164-02046	2046D	3/4" Drive x 1-7/16" Deep			
	164-20480	2048	3/4" Drive x 1-1/2" Std.			
	164-20481	2048D	3/4" Drive x 1-1/2" Deep			
	164-20482	2048DR	3/4" Drive x 1-1/2" Limited Depth			
	164-02052	2052D	3/4" Drive x 1-5/8" Deep			
	164-02056	2056D	3/4" Drive x 1-3/4" Deep			
	164-02060	164-02060 2060D 3/4" Drive x 1-7/8" Deep				
	164-02323	2323C	3/4" Drive x 1-1/2" Hex x 13/16" Square			

	ASCOT NO.	MFG. NO.	DESCRIPTION		
			METRIC		
	166-04033	4033MD	#5 Spline x 33mm Deep		
ķ	166-04035	4035MDT	#5 Spline x 35mm Deep Thin Wall		
Ē	166-04041	4041MDT	#5 Spline x 41mm Deep Thin Wall		
IMPACT SOCKETS			SAE		
L S	166-04026	4026S	#5 Spline x 13/16" Square		
AC	166-04034	4034DT	#5 Spline x 1-1/16" Deep Thin Wall		
Ξ	166-40360	4036D	#5 Spline x 1-1/8" Deep		
DR	166-40361	4036DT	#5 Spline x 1-1/8" Deep Thin Wall		
뿐	166-04038	4038	#5 Spline x 1-3/16" Std.		
SPLINE	166-04040	4040DT	#5 Spline x 1-1/4" Deep Thin Wall		
#5 S	166-04042	4042DT	#5 Spline x 1-5/16" Deep Thin Wall		
#	166-04048	4048D	#5 Spline x 1-1/2" Deep w/Inside Lip		
	166-40480	4048DT	#5 Spline x 1-1/2" Deep Thin Wall		
	166-04323	4323C	#5 Spline x 13/16" Square x 1-1/2" Hex		

	ASCOT NO.	MFG. NO.	DESCRIPTION			
			METRIC			
	165-03017	3017MS	1" Drive x 17mm Square			
	165-03019	3019MS	1" Drive x 19mm Square			
	165-03020	3020MS	1" Drive x 20mm Square			
	165-03021	3021MS	1" Drive x 21mm Square			
	165-03027	3027MD	1" Drive x 27mm Deep			
	165-30302	3030MD	1" Drive x 30mm Deep			
	165-03033	3033MD	1" Drive x 33mm Deep			
	165-03035	3035MD	1" Drive x 35mm Deep			
	165-30381	3038MD	1" Drive x 38mm Deep			
	165-30410	3041MDT	1" Drive x 41mm Deep Thin Wall			
	165-03041	3041MD	1" Drive x 41mm Deep			
	165-03321	3321MC	1" Drive 41mm x 21mm Square			
	165-03517	3517MC	1" Drive x 35mm Deep x 17mm Sq.			
	165-03820	3820MC	1" Drive x 38mm Deep x 20mm Sq.			
			SAE			
S	165-03026	3026S	1" Drive x 13/16" Square			
Ā	165-03030	3030S	1" Drive x 15/16" Square			
8	165-03034	3034DT	1" Drive x 1-1/16" Thin Wall Deep			
L	165-03042	3042D	1" Drive x 1-5/16" Deep			
ă	165-03044	3044D	1" Drive x 1-3/8" Deep			
Σ	165-03046	3046D	1" Drive x 1-7/16" Deep			
~	HOS-03026 165-03030 165-03034 165-03044 165-03046 165-03052 165-03052	3052D	1" Drive x 1-5/8" Deep			
		3054D	1" Drive x 1-11/16" Deep			
·	165-03056	3056D	1" Drive x 1-3/4" Deep			
	165-03060	3060D	1" Drive x 1-7/8" Deep			
	165-03323	3323C	1" Drive 1-1/2" Hex x 13/16" Square			
	165-30280	3028	1" Drive x 7/8" Std.			
	165-30281	3028D	1" Drive x 7/8" Deep			
	165-30300	3030	1" Drive x 15/16" Std.			
	165-30301	3030D	1" Drive x 15/16" Deep			
	165-30320	3032	1" Drive x 1" Std.			
	165-30321	3032D	1" Drive x 1" Deep			
	165-30361	3036D	1" Drive x 1-1/8" Deep			
	165-30362	3036DT	1" Drive x 1-1/8" Deep Thin Wall			
	165-30380	3038D	1" Drive x 1-3/16" Deep			
	165-30401	3040D	1" Drive x 1-1/4" Deep			
	165-30402	3040DT	1" Drive x 1-1/4" Deep Thin Wall			
	165-30420	3042DT	1" Drive x 1-5/16" Deep Thin Wall			
	165-30481	3048D	1" Drive x 1-1/2" Deep w/Inside Lip			
	165-30482	3048DR	1" Drive x 1-1/2" Deep - Standard			

	ASCOT NO.	MFG. NO.	DESCRIPTION		
	169-01002	1002E	1/4" Drive x 2" Chrome Extension		
Ŋ	169-01003	1003E	1/2" Drive x 3" Extension		
盟	169-01005	1005E	1/2" Drive x 5" Extension		
5	169-01020	1020A	1/2" Drive Female x 3/4" Male Adapt.		
ADAPTERS	169-02006	2006E	3/4" Drive x 6" Extension		
త	169-02010	2010A	3/4" Drive Female x 1/2" Male Adapt.		
SS	169-02030	2030A	3/4" Drive Female x 1" Male Adapt.		
<u> </u>	169-20100	2010E	3/4" Drive x 10" Extension		
EXTENSIONS	169-02013	2013E	3/4" Drive x 13" Extension		
Ę	169-03006	3006E	1" Drive x 6" Extension		
	169-03010	3010E	1" Drive x 10" Extension		
۲	169-03013	3013E	1" Drive x 13" Extension		
MPACT	169-03020	3020A	1" Drive Female x 3/4" Male Adapt.		
	169-04010	4010A	#5 Spline Female x 3/4" Male Adapt.		
	169-04020	4020A	#5 Spline Female x 1" Male Adapt.		



# 84 WHEEL SERVICE PRODUCTS // WHEEL TORQUE PRODUCTS

Torque Sockets, Torque Extensions

# Torque Wrenches & Torque Accessories

# MEDIUM/HEAVY DUTY TORQUE SOCKETS

- Originally patented AccuTorq<sup>\*</sup> sockets properly torque wheel nuts to exact factory specs
- Prevents warping of rotors, which causes brake pulsation
- Eliminates broken studs and nuts ■ Avoids damage to aluminum alloy wheels ■ Stops customer complaints about overtightened lug nuts ■ Strobe marks stop turning at the CORRECT torque ■ Includes heavy duty case





495-04000

ASCOT NO.	MFG. NO.	DESCRIPTION
495-00103	10-0103	AccuTorq® Torque Chart
495-03915	20-3915	5-Piece AccuTorq* Med. Duty Truck Set. SET INCLUDES: MD Purple, MD Tan, MD Olive, MD Burgundy & HD Orange
495-04000	20-4000	4-Piece AccuTorq* 1" DR Heavy Duty Truck Set. SET INCLUDES: HD Red, HD Yellow, HD Brown & HD Black, plus Heavy Duty Case
495-04100	20-4100	4-Piece AccuTorq* 3/4" DR Heavy Duty Truck Set. SET INCLUDES: HD Red, HD Yellow, HD Brown & HD Black, plus Heavy Duty Case

ASCOT NO.	MFG. NO.	DESCRIPTION	DRIVE	SIZE	TORQUE	OTHER
MEDIUM/HEAVY DUTY TORQUE SOCKETS: KIT CONTENTS						
495-03045	20-3045	HD Unpainted	1"	30mm	330 Ft./lbs.	
495-03360	20-3360	HD Unpainted	1"	33mm	440 Ft./lbs.	
495-03900	20-3900	MD Purple	1/2"	1"	140 Ft./lbs.	Deep Well
495-03901	20-3901	MD Tan	1/2"	1-1/16"	140 Ft./lbs.	Deep Well
495-03902	20-3902	MD Olive	1/2"	1-1/8"	140 Ft./lbs.	
495-03903	20-3903	MD Burgundy	1/2"	1-1/4"	140 Ft./lbs.	
495-03904	20-3904	HD Orange	3/4"	1"	175 Ft./lbs.	
495-03918	20-3918	HD Red	3/4"	1-1/4"	250 Ft./lbs.	
495-03919	20-3919	HD Brown	3/4"	33mm (1-5/16")	475 Ft./lbs.	
495-03920	20-3920	HD Black	3/4"	1-1/2"	475 Ft./lbs.	
495-03921	20-3921	HD Yellow	3/4"	13/16" Square	475 Ft./lbs.	
495-03908	20-3908	HD Red	1"	1-1/4"	250 Ft./lbs.	
495-03909	20-3909	HD Brown	1"	33mm (1-5/16")	475 Ft./lbs.	
495-03910	20-3910	HD Black	1"	1-1/2"	475 Ft./lbs.	
495-03911	20-3911	HD Yellow	1"	13/16" Square	475 Ft./lbs.	

#### HEAVY DUTY TRUCK TORQUE EXTENSIONS



- Heavy duty truck extensions can convert sockets into Torque Sockets
- Available in 3/4" and 1" drives



**Heavy Duty Truck Torque Extensions** 

ASCOT NO.	MFG. NO.	DESCRIPTION
495-16000	1600-M	3/4" Dr. Truck Torque Extension - 475 Ft./lbs.
495-16001	1600-N	3/4" Dr. Truck Torque Extension - 250 Ft./Ibs.
495-16002	1600-Q	3/4" Dr. Truck Torque Extension - 175 Ft./lbs.
495-16003	1600-U	3/4" Dr. Truck Torque Extension - 350 Ft./lbs.
495-16014	1600-P	1" Drive Truck Torque Extension - 475 Ft./lbs.
495-16015	1600-R	1" Drive Truck Torque Extension - 250 Ft./lbs.
495-16016	1600-S	1" Drive Truck Torque Extension - 350 Ft./lbs.
495-16017	1600-T	1" Drive Truck Torque Extension - 175 Ft./lbs.

# 3/4" X 1" X 13" TORQUE WRENCH EXTENSION





# WHEEL TORQUE PRODUCTS // WHEEL SERVICE PRODUCTS 85

Torque Sockets, Torque Limiting Socket Set



#### PASSENGER CAR AND LIGHT TRUCK **TORQUE SOCKETS**

- Originally patented AccuTorg\* sockets properly torque wheel nuts to exact factory specs
- Prevents warping of rotors, which causes brake pulsation
- Eliminates broken studs and nuts • Avoids damage to aluminum alloy wheels
- Stops customer complaints about over-tightened lug nuts
- Strobe marks stop turning at the CORRECT torque



495-00322

ASCOT NO.	MFG. NO.	DESCRIPTION
495-00315	10-0315	4-Piece AccuTorq * Automotive Set. SET INCLUDES: Gray, Brown, Blue, & Yellow
495-00321	10-0321	8-Piece AccuTorq* Auto & Mini Van Set. SET INCLUDES: Yellow, Red, Blue, Brown, Green, Lt. Brown, Gray & Turquoise
495-00322	10-0322	10-Piece AccuTorg <sup>*</sup> Auto & Lt. Truck Set. <b>SET INCLUDES:</b> Yellow, Red, Blue, Brown, Green, Lt. Brown, Gray, Turquoise, White & Lt. Green
495-00450	10-0450	4-Piece AccuTorg* Lt. Truck Set. <b>SET INCLUDES:</b> White, Turquoise, Lt. Green & Charcoal
495-00455	10-0455	5-Piece AccuTorq® Lt. Truck Set. <b>SET INCLUDES:</b> White, Turquoise, Lt. Green, Charcoal & Lt. Purple

ASCOT NO.	MFG. NO.	DESC.	DRIVE	SIZE	TORQUE	OTHER
PASSENGI	ER CAR & I	LIGHT TRUC	K TORQ	UE SOCKE	rs: KIT CONT	ENTS
495-00304	10-0304	Green	1/2"	17mm	55 Ft./lbs.	
495-00305	10-0305	Red	1/2"	17mm	80 Ft./lbs.	
495-00306	10-0306	Yellow	1/2"	19mm (3/4")	65 Ft./lbs.	Deep Well
495-00307	10-0307	Blue	1/2"	19mm (3/4")	80 Ft./lbs.	Deep Well
495-00308	10-0308	Gray	1/2"	19mm (3/4")	100 Ft./lbs.	
495-00309	10-0309	Black	1/2"	21mm	60 Ft./lbs.	
495-00310	10-0310	Lt. Brown	1/2"	21mm	80 Ft./lbs.	
495-00311	10-0311	Brown	1/2"	21mm (13/16")	100 Ft./lbs.	
495-00312	10-0312	White	1/2"	22mm	120 Ft./lbs.	Deep Well
495-00313	10-0313	Turquoise	1/2"	22mm	140 Ft./lbs.	Deep Well
495-00327	10-0327	Lt. Blue	1/2"	22mm	100 Ft./lbs.	
495-00328	10-0328	Charcoal	1/2"	21mm	147 Ft./lbs.	Deep Well
495-00329	10-0329	Off White	1/2"	17mm	90 Ft./lbs.	
495-00334	10-0334	Lt. Yellow	1/2"	17mm	113 Ft./lbs.	
495-00336	10-0336	Orange	1/2"	22mm	75 Ft./lbs.	
495-00337	10-0337	Dark Green	1/2"	22mm	60 Ft./lbs.	
495-03898	10-3898	Lt. Purple	1/2"	21mm	160 Ft./lbs.	Deep Well
495-03899	10-3899	Lt. Green	1/2"	24mm (15/16")	140 Ft./lbs.	Deep Well



#### 10-PIECE 1/2" DRIVE **TORQUE LIMITING SOCKET SET**

■ Contains the most popular torque sockets to service the majority of passenger cars and light trucks • SET INCLUDES:

All 10 torque sockets listed below • Lifetime warranty ■ Heavy duty blow molded case ■ Lug nut torque application chart included



ASCOT NO. MFG. NO. DESCRIPTION

168-02880 12880 10-Piece Torque Limiting Socket Set

ASCOT NO. MFG. NO. DESCRIPTION

10-PIECE 1	/2" DRIVI	TORQUE LIMITING SOCKET SET: KIT CONTENTS
168-21755	121755M	1/2" Drive 17mm - 55 Ft./lbs. Torque Socket - Green
168-21780	121780M	1/2" Drive 17mm - 80 Ft./lbs. Torque Socket - Red
168-21910	121910M	1/2" Drive 19mm (3/4") - 100 Ft./ Ibs. Torque Socket - Gray
168-21965	121965M	1/2" Drive 19mm (3/4") - 65 Ft./ lbs. Torque Socket - Yellow
168-21980	121980M	1/2" Drive 19mm (3/4") - 80 Ft./ lbs. Torque Socket - Blue
168-22180	122180M	1/2" Drive 21mm - 80 Ft./lbs. Torque Socket - Light Brown
168-22212	122212M	1/2" Drive 22mm (7/8") - 120 Ft./ Ibs. Torque Socket - White
168-22214	122214M	1/2" Drive 22mm (7/8") - 140 Ft./ lbs. Torque Socket - Turquoise
168-22610	122610	1/2" Drive 13/16" - 100 Ft./lbs. Torque Socket - Brown
168-23014	123014	1/2" Drive 15/16" - 140 Ft./lbs. Torque Socket - Light Green

#### 1/2" DRIVE 22MM **TORQUE SOCKETS**

Constructed from heat treated spring steel - Solid one-piece construction ■ Deep well

ASCOT NO.	MFG. NO.	DESCRIPTION
168-22110	122110M	1/2" Drive 22mm 110 Ft./Lb. Torque Socket - Copper APPLICATIONS: Buick LaCrosse 2010+, Regal 2011+, Cadillac XTS 2011+, Chevrolet Camaro 2011+, Saab 9-4X 2010+
168-12254	122115M	1/2" Drive 22mm 154 Ft./ Lb. Torque Socket - Pink





# **WHEEL SERVICE PRODUCTS** // WHEEL TORQUE PRODUCTS

♠ Lug Nut Torque Application Chart, Torque Wrenches




### **Torque Wrenches & Torque Accessories (cont.)**

#### 2017 LUG NUT TORQUE APPLICATION CHART

- Wall chart measuring 2' x 3'
- Provides lug nut specifications for cars and light trucks to Model Year 2017 ■ For use with Original Equipment wheels ■ Laminated for durability ■ Shipped in a protective mailing tube ■ Similar to Tire Guides Lug Nut Torque Chart



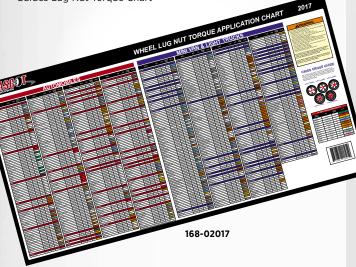

ASCOT NO. MFG. NO. DESCRIPTION

168-02017 TC2017 2017 Lug Nut Torque Application Chart

#### 1/2" DRIVE TORQUE WRENCH

- Dual direction Locking collar prevents accidental setting adjustment Easy to read laser marked scale Blow molded case with calibration certificate
- RANGE: 25-250 ft./lbs. OVERALL LENGTH: 25"



#### 1/4" DRIVE TORQUE WRENCH

- Easy-to-read and set for error-free adjustments
- Automatic locking torque adjustment Ideal for TPMS applications Blow molded case RANGE: 10-150 in./lbs.



#### MICRO-ADJUSTABLE TORQUE WRENCH

■ Dual scale, calibrated dual direction ■ Positive
Lock with spring loaded pull down lock ring ■ Fast,
accurate and easy to set ■ Easy-to-read Laser marked
scale ■ Ergonomic comfort-grip ■ Most feature Quick
Release buttons which provide good socket retention
as well as easy socket removal ■ RANGE: 50-250 ft./
lbs. ■ ACCURACY: ± 4% clockwise ± 6% CCW of
indicated value, CW, from 20% to 100% of full scale





# WHEEL TORQUE PRODUCTS // WHEEL SERVICE PRODUCTS 87



Torque Extensions, Torque Extension Set, Torque Wrench Sets

#### 1" DRIVE TRUCK TORQUE EXTENSIONS

■ 1" drive square ends ■ Once the proper torque is reached the extension will absorb any excess torque



ASCOT NO.	ITEM	MFG. NO.	DESCRIPTION
495-16004	A	1600-P	1" Drive 475 ft./lbs. Torque Limiting Extension
495-16005	В	1600-R	1" Drive 250 ft./lbs. Torque Limiting Extension
495-16006	С	1600-S	1" Drive 350 ft./lbs. Torque Limiting Extension
495-16007	D	1600-T	1" Drive 175 ft./lbs. Torque Limiting Extension
495-16008	E	1600-W	1" Drive 650 ft./lbs. Torque Limiting Extension
495-16009	F	1600-Y	1" Drive 550 ft./lbs. Torque Limiting Extension

#### 1/2" DR 5-PIECE TORQUE **EXTENSION SET**

■ Set includes all 5 extension sockets listed below ■ Provides the ability to torque wheel nuts on passenger cars to the correct specification ■ Set comes in a durable plastic blow molded case Individual extensions sold separately

ASCOT NO.	MFG. NO.	DESCRIPTION
168-12450	2450	1/2" DR 5-Piece Torqu Extension Set

ASCOT NO. MFG. NO. DESCRIPTION

1/2" DR 5-PIECE TORQUE EXTENSION SET: KIT CONTENTS			
168-12465	2465	65 Ft./lbs. Extension - Yellow	
168-12480	2480	80 Ft./lbs. Extension - Blue	
168-12410	24100	100 Ft./Ibs. Extension - Gray	
168-12412	24120	120 Ft./lbs. Extension - White	
168-12414	24140	140 Ft./lbs. Extension - Aqua	

#### **ASCOT 6-PIECE WHEEL** TORQUE WRENCH SET

#### ■ One-way, not bi-directional

■ +/- 4% accuracy ■ Cushioned ratchet head ■ Color coded presets

ASCOI NO.	MFG. NO.	DESCRIPTION
168-16000	16000	6-Piece Preset/Adjustable (5 Preset - 1 Adjustable) Wheel Torque Wrench Set

ASCOT NO. DESCRIPTION



1/2" Preset Torque Wrench Repair Kit

#### **ASCOT 4-PIECE WHEEL TORQUE WRENCH SET**

■ One-way, not bi-directional ■ +/- 4% accuracy • Cushioned ratchet head ■ Color coded presets

ASCOT NO.	MFG. NO.	DESCRIPTION
168-13000	13000	4-Piece Preset Wheel Torque Wrench Set

ASCOT NO. DESCRIPTION

168-12450

168-96509

ASCOT 4-PIECE WHEEL TORQUE WRENCH SET: KIT CONTENTS		
168-12080	80 Ft./lbs. Preset Torque Wrench - Blue	
168-12100	100 Ft./lbs. Preset Torque Wrench - Gray	
168-12120	120 Ft./lbs. Preset Torque Wrench - White	
168-12140	140 Ft./lbs. Preset Torque Wrench - Aqua	
163-91217	1/2" Dr. x 17mm Chrome Socket	
163-91219	1/2" Dr. x 19mm Chrome Socket	
163-91221	1/2" Dr. x 21mm Chrome Socket	
163-91234	1/2" Dr. x 3/4" Chrome Socket	
163-91236	1/2" Dr. x 13/16" Chrome Socket	
163-91278	1/2" Dr. x 7/8" Chrome Socket	
169-12006	Wall Board	







168-13000



# 88 WHEEL SERVICE PRODUCTS // WHEEL TORQUE PRODUCTS

Blue Tork, Torque Wrenches

# **Torque Wrenches & Torque Accessories (cont.)**



#### 1" BLUE TORK

■ Two pneumatic motor for rundown and final tightening ■ Preset and adjustable shut off for torque control ■ ERGONOMICS: Very low noise level, virtually no vibration ■ EFFICIENCY: Precise and accurate tightening, less fatigued operators ■ ENVIRONMENT IMPROVEMENTS: by increasing durability of the tools, we reduce waste ■ QUALITY: Precise, accurate tightening to the manufacturer's recommended torque and angle specifications ■ MAXIMUM TORQUE: 660 ft./lbs.







ASCOT NO.	MFG. NO.	DESCRIPTION
168-07600	CP-7600xB	Non-Reversible Single Torque Preset
168-07602	CP-7600xB-R	Reversible Single Torque Preset
168-07603	CP-7600xB-R4P	Reversible 4 Torque Preset Selector

# FRL UNIT FOR BLUE TORK

• INCLUDES: Industrial grade filter; Regulator; Single point lubricator; 25' hose with capillary tube; 1 Quart of special tool oil approved for the Blue Tork

ASCOT NO. MFG. NO.

**117-58625** 586-254-1000



DESCRIPTION

FRL Unit for Blue Tork



# PRESET TRUCK CLICKER STYLE TORQUE WRENCH

Preset at 475 ft./
 Ibs. • Designed for fleet applications

■ Massive 4-1/2' length for high torque applications

■ Supplied with handy storage bag for sockets and extensions ■ Both the wrench and the bag have reflective strips for safe highway night use





 ASCOT NO.
 MFG. NO.
 DESCRIPTION

 168-47501
 1-475
 1" Drive x 475 Ft./lbs. Preset Torque Wrench

 168-96112
 9610-0112RK
 1" Torque Wrench Repair Kit





CALIBRATED DUAL DIRECTION

168-12250

168-47501

# MICRO-ADJUSTABLE TORQUE WRENCH

■ Dual scale, calibrated dual direction

■ Positive lock with spring loaded pull down lock ring ■ Fast, accurate and easy to set

■ Easy-to-read Laser marked scale ■ Ergonomic comfort-grip ■ Most feature Quick Release buttons which provide good socket retention as well as easy socket removal ■ RANGE: 50-250 ft./ lbs. ■ ACCURACY: ± 4% clockwise ± 6% CCW of indicated value, CW, from 20% to 100% of full scale

ASCOT NO. MFG. NO. DESCRIPTION

**168-12250** 2503MFRRH 1/2" Drive Micro-Adjustable Torque Wrench



# WHEEL TORQUE PRODUCTS // WHEEL SERVICE PRODUCTS 89

Flex Hinge Torque Wrench, Pneumatic Torque Multiplier, Torque Wrench Checker





#### FLEX HINGE TORQUE WRENCH

 Robust construction achieves accurate results to +/- 4% ■ Flex hinge design provides unmistakable signal

■ Flex angle makes it virtually impossible to overtorque - Torques both right and lefthanded threads - Calibrated and certified to ISO Standards ■ Scale reads in ft./lbs. ■ 3/4" or

6 Oz. Oil Can ASCOT NO. 329-50515 MFG. NO. PLW50-515

applying to

the vehicle

168-12017

1" drive x 13" extension available



168-60020 168-60025



Plastic carrying case included with flex-hinge torque wrenches.



The flex-hinge torque wrench in use.

ASCOT NO.	MFG. NO.	DESCRIPTION
168-12007	12007	3/4" Drive 600 Ft./lbs. Capacity
168-12017	12007.01	1" Drive 600 Ft./lbs. Capacity
168-12009	12009	3/4" Drive 750 Ft./lbs. Capacity
168-12019	12009.01	1" Drive 750 Ft./lbs. Capacity
168-12997	12297	3/4" Drive Block for Flex Hinge Torque Wrench
168-12999	12299	1" Drive Block for Flex Hinge Torque Wrench
168-60020	12299	1" Square Drive for Flex Hinge Torque Wrench
168-60025	12297	3/4" Square Drive for Flex Hinge Torque Wrench
169-02013	2013E	3/4" Drive x 13" Impact Extension
169-03013	3013E	1" Drive x 13" Impact Extension
169-13413	13413E	3/4" Drive x 1" Drive x 13" Impact Extension

#### PNEUMATIC TORQUE MULTIPLIER

• OPERATING RANGE: 147 to 738 ft./lbs. (200 to 1000 Nm)

• 'Soft Start' trigger control aids socket location, and allows gradual and safe reaction location • Extended reaction is ideal for reaching recessed nuts • FAST: 1000 Nm version has a free speed of 140 rpm for rapid bolt run-down ■ For safety, gearbox can rotate independently from the handle so that reaction forces are not transmitted back to the operator

■ Light weight for ease of handling ■ NON IMPACTING: Low vibration levels make these tools comfortable and safe to use • On Bi-Directional tools, the direction control knob is locked while the tool is running to prevent accidental damage to the gearbox • QUIET: Less than 85 dB(A) when under load • Square drive is quickly and easily replaceable



ASCOT NO. 168-18141

MFG. NO.

PTME-72-2000-B

1" Square Drive Bi-Directional Pneumatic Multiplier

DESCRIPTION

NORBAR 750 FT./LBS. **TORQUE WRENCH CHECKER** 

The 43237 Torque Wrench Checker is an accurate and simple to operate torque wrench checker. There is only one button; used to zero the unit prior to measurement.

■ Accurate and Durable ■ Easily portable or can be fixed and mounted ■ No special skills required to use ■ Can be provided with options • APPLICATION: For use

with click or break style, or dial torque wrenches

DESCRIPTION

ASCOT NO. MFG. NO. 168-43237 43237

Norbar 750 lb-ft Torque Wrench Checker

168-43237



# 90 WHEEL SERVICE PRODUCTS // WHEEL TORQUE PRODUCTS

Torque Wrenches

### **Torque Wrenches & Torque Accessories (cont.)**

# PRECISION INSTRUMENTS

#### MICROMETER TORQUE WRENCHES

■ EXTREMELY ACCURATE: Within 3% of reading from 20% of full scale to full scale clockwise and counterclockwise ■ EXCLUSIVE PATENTED CALIBRATION MECHANISM: This patented mechanism allows for calibration in both the clockwise and counter-clockwise directions, plus with regard to spring rate, without the disassembly of the wrench. This protects against contamination of the working mechanism, and make calibration quick and easy ■ EXCLUSIVE PATENTED ROLLER-RELEASE: This patented feature removes over 95% of the friction inherent in other click wrenches thereby extending life and providing for more reliable operation. ■ ALL "M" SERIES MEETS OR EXCEEDS ALL APPLICABLE REQUIREMENTS OF: ANSI / ASME B107.14M, GGG-W-00686C, BS6073: 1988, ISO6789



ASCOT NO.	MFG. NO.	DESCRIPTION
168-01200	M1R200H	1/4" Drive
168-02101	M2R100F	3/8" Drive
168-03252	M3R250F	1/2" Drive

Contact us
for information
for information
regarding our
regarding wrench
Torque Wrench
Recalibration and
Repair Program

# SPLIT-BEAM CLICK TORQUE WRENCHES

- EXTREMELY ACCURATE: within 4% of reading from 20% of full scale to full scale Setting torque on adjustable wrenches is fast and easy because there is no spring tension on the adjustment knob
- Torque setting locks on adjustable wrenches for repetitive applications Wrench length designed to provide the leverage required for maximum torque applications. Also provides the needed reach for those hard to get at places





ASCOT NO.	MFG. NO.	DRIVE	LENGTH	GRADUATIONS
495-07375	7375	3/8"	15-1/8"	150-750 inlbs. /10 inlbs.
495-07377	7377	1/2"	17-3/4"	30-150 ft./lbs. /2 ft./lbs.
495-07378	7378	1/2"	19-3/8"	50-250 ft./lbs. /2 ft./lbs.
495-07379	7379	3/4"	42-1/4"	100-600 ft./lbs. /10 ft./lbs.



#### WHAT IS TORQUE?

Torque is the measurement of twisting force that is applied to a lug nut to create bolt tension.

#### WHAT IS CLAMPING FORCE?

Clamping force is the result of bolt tension and it is the physical property that holds the wheels on the vehicle.

#### DOES THE CORRECT TORQUE GUARANTEE THE CORRECT CLAMPING FORCE?

No. Clamping force cannot be measured in the field, so technicians must use the correct torque to approximate the amount of clamping force.

Since there are a number of factors that determine how much clamping force is generated per foot pound of torque, technicians should always follow the RIST procedure developed by the Tire Industry Association (TIA).



stands for remove debris from mating surfaces





stands for inspect all of the components





stands for snug the lug nuts in a star pattern





stands for torque the fasteners to specification



**TORQUE SPECIFICATIONS** 

Hub-Pilot Wheel: 450-500 ft/lbs. oiled | Stud-Pilot Wheel: 450-500 ft/lbs. dry | Demountable Rim: 200-260 ft/lbs. dry

TIA is the industry leader in commercial truck tire and wheel service education. Since Occupational Safety and Health Administration (OSHA) Regulation 29 CFR 1910.177 requires training for all employees that service truck tires, fleets must make sure that every technician who installs, removes or handles truck tires in any way has compliant training. TIA developed the Fleet Tire Service OSHA Compliance Program so the trucking industry could provide in-house technician training that exceeds the minimum requirements established by 29 CFR 1910.177.

For more information on TIA training or the RIST procedure, visit TIA's website: http://www.tireindustry.org/training.asp or call 800-876-8376, ext. 106.



# 92 WHEEL SERVICE PRODUCTS // WHEEL TORQUE PRODUCTS

Torque Wrenches, Torque Multipliers



# **Torque Wrenches & Torque Accessories (cont.)**

#### **TORQUE MULTIPLIERS**

 Increase the range of your torque wrench as much as 14 to one with a Central Torque Multiplier

 Designed with four pinion gears in a compact housing, these multipliers expand your torque wrench range by their stated ratio







495-96351

ASCOT NO.	MFG. NO.	RATE	DRIVE Input	DRIVE OUTPUT	MAX. OUTPUT CAP	WEIGHT (LBS.)	BODY Length	TOTAL Length
495-06380	6380	4:1	1/2"	3/4"	1,000 Inlbs.	7	6.6"	22"
495-06382	6382	4.33:1	1"	1-1/2"	4,000 Inlbs.	35	9.7"	30"
495-06383	6383	4.6:1	1"	1-1/2"	8,000 Inlbs.	47	12.1"	32"
495-06384	6384	6:1	1"	2-1/2"	12,000 Inlbs.	78	11.5"	30"
495-06386	6386	14.3:1	3/4"	1-1/2"	3,000 Inlbs.	30	9.7"	30"
495-06387	6387	4:1	3/4"	1"	2,000 Inlbs.	14	6.6"	25"

# MICROMETER TORQUE WRENCHES

■ Set desired torque on micrometer type scale by rotating hand grip ■ Automatically indicates desired torque by feel and sound ■ No need to worry about getting a reading ■ Wrench torques left or right and resets in seconds ■ Accurate throughout entire torque range ■ DUAL SCALE: English and international Metric ■ Chrome finish ■ ACCURACY: +/-4%CW and +/-6%CCW ■ 20% - 80% of capacity ■ Metal hand grip is resistant to damage from striking or automotive fluids such as gasoline, oil and kerosene ■ RATCHET HEAD: The 45-tooth ratchet is designed for speedy torquing and operating in restricted areas





ASCOT NO.	MFG. NO.	RANGE (INCREMENT)	DRIVE	LENGTH	WEIGHT (LBS.)
495-96351	96351	25-250 Inlbs. (1 inlbs.)	3/8" Ratchet	12.6 inches	1.4
495-96352	96352	10-100 Inlbs. (5 Inlbs.)	3/8" Ratchet	17.3 inches	1.9
495-96353	96353	25-250 Inlbs. (1 Inlbs.)	1/2" Ratchet	20.0 inches	2
495-96355	96355	100-600 Inlbs. (5 Inlbs.)	3/4" Ratchet	38.5 inches	0.5
495-96361	96361	20-200 Inlbs. ( 1 Inlbs.)	1/4" Ratchet	12.4 inches	1.5
495-96395	96395	10-80 Inlbs. (Inlbs.)	3/8" Flexhead	17.6 inches	2.2



250 ft./lbs. • HEAVY
DUTY RATCHET: Fewer
and stronger teeth

UNIDIRECTIONAL TORQUEING:

Tightens in right hand direction only, does not tighten in left hand direction for improved performance



Tear resistant, oil and solvent resistant

- Protective head cover made from modified silicone
- modified silicone
  Comes in plastic
- storage case

  MADE IN USA

ASCOT NO. MFG. NO. 168-97354

DESCRIPTION

Micrometer
Torque Wrench:
25-250 Ft./Lbs.

HEAVY

**DUTY** 

**FEWER &** 

STRONGER

TEETH





### Rollock, Lug Lock Wheel Nut Retainers

# **Loose Nut Prevention**



#### **ROLLOCK - LOOSE NUT PREVENTION**

 Cost effective way to prevent wheel nuts from **loosening** • Galvanized steel product locks wheel nuts in place • APPLICATION: ROLLOCK is for use on 19.5 & 22.5 Hub-Piloted Wheels (8 or 10 hole) - ROLLOCK IS EASY TO REMOVE: Unscrew the Wheel Nut in normal manner and the ROLLOCK clamp will easily come off









The Rollock is a cost effective way to prevent nuts from loosening.

ASCOT NO.	MFG. NO.	DESCRIPTION
402-62000	62000	Rollock, 4-1/8" Spacing, 30-33mm Nut
402-62500	62500	Rollock, 3-1/2" Spacing, 30-33mm Nut



#### LUG LOCK WHEEL NUT RETAINERS

Use the resistance between two nuts to minimize their ability to rotate and loosen • Flexible and easy to install, fits over two adjacent nuts ■ Field tested at high and low rotation levels ■ Lab tested in severe vibration conditions • APPLICATION: Designed to be used on wheels with 33mm nuts on 3.5" stud centers - Compatible with a complete wheel mounting safety program • Other sizes and colors available



The Lug Lock Wheel Nut Retainers in use.

ASCOT NO.	MFG. NO.	DESCRIPTION
402-62600	62600	3 1/2" Spacing, 350 degrees



# 94 WHEEL SERVICE PRODUCTS // LOOSE NUT PREVENTION

Checkpoint Loose Wheel Nut Indicators



DESCRIPTION

### Loose Nut Prevention (cont.)

### CHECKPOINT LOOSE WHEEL NUT INDICATORS\*

- A simple and cost effective product that can help guard against a potential catastrophic loss caused by loose lug nuts when used as part of a total torque wheel program
- When fitted on properly torqued wheel nuts and inspected by a driver or technician, the Checkpoints clearly and visually indicate if the wheel nuts have moved
- If the arrows have moved from the pointto-point pattern, this indicates that they have loosened and need attention
- Enhanced fleet safety management
- Facilitates the driver's check for wheel nut movement and his involvement with vehicle safety
- Early warning for mechanic or driver of excessive heat caused by possible brake or bearing problems
- Demonstrate your fleet commitment to vehicle road worthiness and safety
- QUANTITY: 100 per bag



ASCOT NO. MFG. NO.





The Checkpoint Loose Wheel Nut Indicators in use.

Checkpoint Loose Wheel Nut Indicators

	CHE	CKPOINT
402-20017	CPY17MM	Checkpoint 17MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20018	CPY18MM	Checkpoint 18MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20019	CPY19MM	Checkpoint 19MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20020	CPY20MM	Checkpoint 20MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20021	CPY21MM	Checkpoint 21MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20078	CPY22MM	Checkpoint 22MM (7/8") Fluorescent Yellow Loose Wheel Nut Indicator
402-20023	CPY23MM	Checkpoint 23MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20024	CPY24MM	Checkpoint 24MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20001	CPY25MM	Checkpoint 25MM (1") Fluorescent Yellow Loose Wheel Nut Indicator
402-20026	CPY26MM	Checkpoint 26MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20027	CPY27MM	Checkpoint 27MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20028	CPY28MM	Checkpoint 28MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20029	CPY29MM	Checkpoint 29MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20030	CPY30MM	Checkpoint 30MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20114	CPY31MM	Checkpoint 31MM (1-1/4") Fluorescent Yellow Loose Wheel Nut Indicator
402-20032	CPY32MM	Checkpoint 32MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20033	CPY33MM	Checkpoint 33MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20034	CPY34MM	Checkpoint 34MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20035	CPY35MM	Checkpoint 35MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20036	CPY36MM	Checkpoint 36MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20015	CPY38MM	Checkpoint 38MM (1-1/2") Fluorescent Yellow Loose Wheel Nut Indicator
402-20040	CPY40MM	Checkpoint 40MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20041	CPY41MM	Checkpoint 41MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20044	CPY44MM	Checkpoint 44MM Fluorescent Yellow Loose Wheel Nut Indicator
402-20046	CPY46MM	Checkpoint 46MM Fluorescent Yellow Loose Wheel Nut Indicator

\*The use of Checkpoint Loose Wheel Nut Indicators does not guarantee wheel-offs will not occur.



# LOOSE NUT PREVENTION // WHEEL SERVICE PRODUCTS 95



Checkpoint Loose Wheel Nut Indicators

ASCOT NO.	MFG. NO.	DESCRIPTION				
CHECKPOINT HI-TEMP						
402-21019	СРОНҮ19ММ	Checkpoint 19MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21021	СРОНҮ21ММ	Checkpoint 21MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21022	СРОНҮ22ММ	Checkpoint 22MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21030	СРОНҮ30ММ	Checkpoint 30MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21031	СРОНҮЗ1ММ	Checkpoint 31MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21032	СРОНҮ32ММ	Checkpoint 32MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21033	СРОНҮЗЗММ	Checkpoint 33MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21036	СРОНҮ36ММ	Checkpoint 36MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21038	СРОНҮ38ММ	Checkpoint 38MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21040	CPOHY40MM	Checkpoint 40MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21041	CPOHY41MM	Checkpoint 41MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21044	CPOHY44MM	Checkpoint 44MM Orange Hi-Temp Loose Wheel Nut Indicator				
402-21046	СРОНҮ46ММ	Checkpoint 46MM Orange Hi-Temp Loose Wheel Nut Indicator				
	CH	IECKTORQUE				
402-22032	CPTR32MM	Checktorque 32MM Red Loose Wheel Nut Indicator				
402-22033	CPTR33MM	Checktorque 33MM Red Loose Wheel Nut Indicator				
402-22038	CPTR38MM	Checktorque 38MM Red Loose Wheel Nut Indicator				
	PO	INT TO POINT				
402-23033	CPTRPP33MM	Checktorque Point to Point 33MM Red Loose Wheel Nut Indicator				
402-20133	СРСҮРРЗЗММ	Checkpoint Caution Yellow Med. Arrow 33MM Loose Wheel Nut Indicator				
402-23133	СРОНТРРЗЗММ	Checkpoint Point to Point 33MM Orange Hi-Temp Wheel Nut Indicator				

ASCOT NO.	MFG. NO.	DESCRIPTION
		DUSTITE
402-24027	CPDTY27MM	Dustite Yellow 27MM Loose Wheel Nut Indicator
402-24028	CPDTY28MM	Dustite Yellow 28MM Loose Wheel Nut Indicator
402-24030	CPDTY30MM	Dustite Yellow 30MM Loose Wheel Nut Indicator
402-24032	CPDTY32MM	Dustite Yellow 32MM Loose Wheel Nut Indicator
402-24033	CPDTY33MM	Dustite Yellow 33MM Loose Wheel Nut Indicator
402-24038	CPDTY38MM	Dustite Yellow 38MM Loose Wheel Nut Indicator
402-24133	CPDTSG33MM	Dustite Silver Gray 33MM Loose Wheel Nut Indicator
	DUSTI	TE LONG REACH
402-25032	CPDTLRY32MM	Dustite Long Reach Yellow 32MM Loose Wheel Nut Indicator
402-25033	CPDTLRY33MM	Dustite Long Reach Yellow 33MM Loose Wheel Nut Indicator
402-25133	CPDTLRSG33MM	Dustite Long Reach Silver Gray 33MM Loose Wheel Nut Indicator
402-25021	CPDTLRY21MM	Dustite Long Reach Yellow 21MM Loose Wheel Nut Indicator
402-25022	CPDTLRY22MM	Dustite Long Reach Yellow 22MM Loose Wheel Nut Indicator





DUSTITE



CHECKPOINT





# 96 WHEEL SERVICE PRODUCTS // WHEEL CENTERING PRODUCTS

Wheel Centering Tool Set, "EZ ON" Wheel & Brake Drum Centering Sleeves




# Wheel Centering Products

### WHEEL CENTERING PRODUCTS FOR HUB PILOTED WHEELS

- Increases fuel mileage
- Increases tire life
- Decreases tire vibration
- Cuts rebalancing costs
- Reduces "wheel-off" condition
- Reduces tire cupping

#### Wheel Vibrations? Wheel Hop? Brake Pedal Pulsations? Erratic Tire Wear? **Excessive Fuel Consumption?**

If you are experiencing these problems, it may be because your wheels aren't centered on the hub. And if your wheels aren't centered, you will continue to experience these problems. With Specialty Products' Wheel Centering Products, you can re-center your wheel, and eliminate all of these problems.

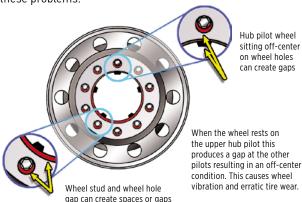

between wheel and hub pilot

#### How it works

If your hub piloted wheel is sitting on the hub stud off-center (as shown in the illustration to the left) you need these parts and tools to avoid wheel hop and excess tire wear, and to increase your fuel mileage. The theory behind the hub pilot is it centers the wheel. The fact is gravity causes the weight of the wheel to rest only on the upper pilots creating a gap in the bottom pilots. Even the smallest gap results in an egg shaped motion upon rotation. This uneven motion creates rolling resistance which causes tire vibration, increased fuel consumption and erratic tire wear. The bottom line is, you can't balance an egg.

#### "EZ ON" WHEEL CENTERING TOOL SET

Simply slide the 3 centering tapered tools over the wheel studs at the 12, 8, and 4 o'clock positions; mount wheel and add lugnuts; remove the tools and replace remaining lugnuts, torquing to manufacturer specifications. The wheel is now completely centered. Problem Solved!

■ Threadless Design ■ Saves

Installation Time ■ Tapered Nose ■ Eases Wheel Mounting

■ Single Set ■ APPLICATION: For Steer, Drive & Trailer Axles



Our new threadless design allows the installer to quickly and easily center the wheels to the hub. And our tapered design makes it easy to mount the wheel over the hub.

ASCOT NO.	MFG. NO.	DESCRIPTION
491-32111	32111	"F7 On" Wheel Centering Tool S

#### "EZ ON" WHEEL & BRAKE DRUM CENTERING SLEEVES

■ These sets center both steer axle HD wheels and brake drums to minimize wheel vibrations, brake pedal pulsations and wheel hop • APPLICATION: For

both Aluminum and Steel steer wheels and a variety of brake drum types









ASCOT NO.	MFG. NO.	DESCRIPTION 491-32124	
491-32120	32120	Aluminum 1.25" hole/.5" depth	
491-32121	32121	Aluminium 1.25" hole/.25" to .3125" depth	
491-32124	32124	Steel 1.25" hole/.5" depth	



# WHEEL CENTERING PRODUCTS // WHEEL SERVICE PRODUCTS 97

♦ Wheel Stud Alignment Tool, Wheel Centering Pin Sets & Sleeves

#### **O-LINE-ER WHEEL STUD ALIGNMENT TOOL**


• Makes it easy to line up wheel studs with holes in rim for easy installation • Decreased installation time Increase worker productivity Reduce risk of injury from struggling with heavy tires and rims

ASCOT NO. MFG. NO. DESCRIPTION

491-00101 GTO-01TB O-Line-Er Wheel Stud Alignment Tool









The O-Line-Er Wheel Stud Alignment Tool makes it easy to line up wheel studs with holes in rim for easy installation.

#### "SOLUTION A" WHEEL **CENTERING PIN SETS**

- Reusable Shop Tool Hardened Steel
- Threaded Inside for Easy Removal
- Sold in sets of 3 with storage case

ASCOT NO.	MFG. NO.	DESCRIPTION
491-02666	A-2666	Steer & Drive axles, 5-1/2: length, Steel & Aluminum wheels, will center 1" brake drums
491-01573	A-1573	Steer & Drive axles and some trailers, 4" length, Steel & Aluminum Wheels
491-01339	A-1339	Steer axles, 3" length, Steel & Aluminum wheels





#### "SOLUTION B" INTERNAL CENTERING SLEEVES

- Threaded Inside for best positioning and retention Stays on wheels
- Zinc plated to resist corrosion Sold in sets of 6 per axle



ASCOT NO.	MFG. NO.	DESCRIPTION	GUN	ITE#	WEBB #	ARVIN MERITOR #
491-01504 B-1504-GA		1.25"	3573X	3710X	61528B	53-123448-002
		diameter hole, 1/4"-	2596X	3721AX	65548B	
		5/16" hole	2597X	3726X	65554B	
	depth	3598X 3758	3758X	65710B		
			3686X	3774X		
			3687X	3800X		

ASCOT NO.	MFG. NO.	DESCRIPTION	CONMET #
491-01825	B-1825-CON-A	1.34-1.37" diameter hole, 1/2" hole depth	10009920

ASCOT NO.	MFG. NO.	DESCRIPTION		CONMET#	
491-01860	B-1860-CON-A	1.27" diameter hole, 1/2" depth	107164	107862	10005331
			107193	107453	10001783
			10757	10001781	10005332

ASCOT NO.	MFG. NO.	DESCRIPTION	GUNITE#	MOTOR WHEEL CENTRIFUSE #	ARVIN MERITOR #
491-01594	B-1594-CA	1.25" diameter hole,	9001X	90089B	53-123512-002
		1/4"-5/16" hole depth	9000X	89870B	53-123542-002
			9035X	90174BK	53-123627-002
				91265B	
				90600B	
				90137B	



# 98 WHEEL SERVICE PRODUCTS // LUG NUT REMOVAL PRODUCTS

Nut Buddy Lug Nut Remover, Twist Socket Lug Nut Removal Kits

# **Lug Nut Removal Products**



#### **NUT BUDDY LUG NUT REMOVER**

- Loosens the most stubborn wheel nuts
- APPLICATION: Use on commercial or agricultural wheels GEAR RATIO: 58:1
- RATED OUTPUT TORQUE: 2950 ft/ lbs. ■ TWO SOCKETS INCLUDED: 1-1/2" (38mm) and 1-5/16" (33mm)





404-67300

**ASCOT NO. MFG. NO. DESCRIPTION 404-67300** | 67300 | Nut Buddy Lug Nut Remover

#### 3-PIECE TWIST SOCKET LUG NUT REMOVAL SYSTEM

■ Removal of damaged 3/4" and 19mm, 13/16" and 21mm lug nuts ■ Two dualsided twist sockets have a fluted design which gives the sockets a tight grip to remove the most difficult locking and damaged lug nuts from the socket ■ Works with 1/2" impact gun or breaker bar for service calls ■ Includes an extractor punch

ASCOT NO.	MFG. NO.	DESCRIPTION
492-04300	4300	3-Piece Twist Socket Lug Nut Removal System
492-04200	4200	Dual Sided Twist Socket Lug Nut Remover









5-PIECE LOCKING LUG NUT TWIST SOCKET REMOVAL KIT

■ METRIC 2-PC. HUB CENTERING NUT: 33mm hex x 1.5mm thread ■ Designed to eliminate imbalance in truck wheels ■ Stamped 450-500

ft./lbs. Elongated neck for centering the wheel to the hub Assembled in USA

■ Packaged 75 per master carton

ASCOT NO. MFG. NO. DESCRIPTION

492-04240 | LT-4240 | 5-Piece Locking Lug Nut Twist Socket Removal Kit

#### TWIST SOCKET REMOVAL KIT

- This kit easily removes damaged nuts, studs, pipe nipples and bolts
- Comes mounted on a 1/2" rail, individually packaged

ASCOT NO. MFG. NO. DESCRIPTION

**492-04400** LT4400 1/2" Drive

1/2" Drive 6-Piece Twist Socket Removal Kit



I 4 Ken-Tool

492-30116

492-04240

# 5-PIECE DEEP TWIST SOCKET SET

Twist sockets are specifically designed to easily remove damaged, rounded or corroded nuts, wheel lugs, bolts, pipes, pipe nipples or studs

 Simply place the socket so it barely catches the head of the fastener and turn with an air ratchet, hand ratchet, or breaker

bar ■ The unique spiral fluting

bites onto the damaged fastener and won't let go **APPLICATION:** Designed for general automotive applications **INCLUDES THE FOLLOWING SOCKETS:** 19mm-3/4", 13/16", 7/8", 15/16", 1"

 ASCOT NO.
 MFG. NO.
 DESCRIPTION

 492-30116
 30116
 5-Piece Deep Twist Socket Set



# LUG NUT REMOVAL PRODUCTS // WHEEL SERVICE PRODUCTS 99

Sav-A-Stud Rethreaders, Locking Lug Key Set



#### SAV-A-STUD RETHREADER

■ Damaged studs can be renewed in minutes without removing the caliper rotor or stud



drive vehicles



493-30100

ASCOT NO.	MFG. NO.	DESCRIPTION
493-30100	30100	Passenger Car/ Light Truck Save-A-Stud Rethreader Kit
493-30200	31200	Heavy Duty Truck Save-A-Stud Rethreader

#### TRUCK SAV-A-STUD RETHREADER

Repairs wheel studs, spindles and standard threaded studs



493-30125

ASCOT NO.	MFG. NO.	DESCRIPTION
493-30125	31250	3/4"-14 Left Hand, 3/4"-14 Right Hand, 22mm x 1.5mm
493-31270	31270	3/4"-14 Left Hand, 3/4"-14 Right Hand, 22mm x 1.5mm, 1-1/8" Left Hand - 1-1/8" Right Hand



### 16-PIECE LOCKING **LUG KEY SET**

- Heat treated chrome vanadium steel construction
- Easily removes locking lug nuts
- Thin wall sockets prevent damage to wheels
- Extra long lug keys keep your wrench away from the wheel preventing nicks and scratches
- Double hex head design fits most lug wrenches

Packed in blow molded case with color sleeve



**APPLICATION GUIDE** 

402-01283

#### KIT CONTENTS

HEX: 11mm, 12mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 20mm

**SOCKETS INCLUDED:** (2) 5/8", 41/64", 45/64", (2) 15/32", 19/32", (2) 11/16", 3/4", 7/16", 5/8", (2) 1/2", 13/16", 9/16"

ASCOT NO.	MFG. NO.	DESCRIPTION
402-01283	CHT1283	16-Piece Locking Lug Key Set
402-28301	1283-1	7-Spline Small Diameter Lug Nut Socket - 3/4" Inner Diameter
402-28302	1283-2	7-Spline Small Diameter Lug Nut Socket - 11/16" Inner Diameter
402-28303	1283-3	7-Spline Small Diameter Lug Nut Socket - 5/8" Inner Diameter
402-28304	1283-4	5-Spline Small Diameter Lug Nut Socket - 5/8" Inner Diameter
402-28305	1283-5	10-Point Star Lug Nut Key - 1/2" Tip Outer Diameter
402-28306	1283-6	8-Point Star Lug Nut Key - 5/8" Tip Outer Diameter
402-28307	1283-7	8-Point Star Lug Nut Key - 7/16" Tip Outer Diameter
402-28308	1283-8	8-Point Star Lug Nut Key - 1/2" Tip Outer Diameter
402-28309	1283-9	6-Spline Small Diameter Lug Nut Socket - 45/64" Inner Diameter
402-28310	1283-10	6-Spline Small Diameter Lug Nut Socket - 41/64" Inner Diameter
402-28311	1283-11	High Tech Hex Lug Nut Key - 15mm Hex Size
402-28312	1283-12	High Tech Hex Lug Nut Key - 9/16" Hex Size
402-28313	1283-13	High Tech Hex Lug Nut Key - 12mm Hex Size
402-28314	1283-14	High Tech Fluted Hex Lug Nut Key - 12mm Hex Size
402-28315	1283-15	12-Spline Small Diameter Lug Nut Socket - 13/16" Inner Diameter
402-28316	1283-16	12-Spline Small Diameter Lug Nut Socket - 11/16" Inner Diameter



# 100 WHEEL SERVICE PRODUCTS // LUG NUT REMOVAL PRODUCTS

Lug Nut Remover Sets, Wheel Lock Removal Kits

### Lug Nut Removal Products (cont.)

### Ken-Tool®

#### **4-PIECE LUG NUT** REMOVER IMPACT **SOCKET SET**

APPLICATION: Use for removing wheel locks or damaged lug nuts - Patented, internal tapered reverse threads lock onto damaged nut and easily pulls

off using impact wrench - Convenient compact storage case • INCLUDES THE FOLLOWING 1/2" **DRIVE SIZES: 3/4", 13/16",** 



492-30254

MFG. NO. DESCRIPTION ASCOT NO.

1", 1-1/8" • MADE IN USA

**492-30254** 30254 4-Piece Lug Nut Remover Impact Socket Set

#### **4-PIECE HEAVY DUTY WHEEL STUD** REMOVER SET

APPLICATION:

Removes damaged wheel studs and inner **Budd nuts** 

■ Patented, internal tapered reverse threads lock onto damaged stud or nut and







492-30649

easily pulls off using impact wrench ■ Wheel Stud Removers are 3/4" hex drive Budd Nut Removers are 1-1/8" hex drive - Convenient compact storage case, 6.5" x 4.5" x 2.75"; 3.5 lbs • SET

**INCLUDES THE FOLLOWING SIZES:** 

5/8", 3/4", 1-1/8" Budd wheel inner nut left hand thread, 1-1/8" Budd wheel inner nut right hand thread • MADE IN USA

ASCOT NO. MFG. NO. DESCRIPTION

492-30649 30649 4-Piece Heavy Duty Wheel Stud Remover Set

#### 1/2" DRIVE 13-PIECE WHEEL LOCK REMOVAL KIT

■ APPLICATION: For Ford, Chrysler & GM Vehicles as well as standard and oversized OEM and aftermarket wheel locks for other domestic and imported cars and light trucks



#### KIT CONTENTS

Ford, Chrysler & Large GM Lock Remover

GM Spline Hublock Adapter

Standard GM Hubcap Locks

Stripped 18mm/GM Wheel Cover Adapter

Corvette-GM N& F Body Adapter

Standard Ford & GM/ Large Wheel Adapter

Oversized McGuard Wheel Lock Adapter

Late Model Chrysler Lock Adapter

1/2" Dr. 18mm Nut/Corvette GM Lock Remover

3/4", 19mm, OS Wheel Lock Remover

7/8" OS Wheel Lock Remover

1/2" x 3" Impact Extension

MFG. NO. DESCRIPTION ASCOT NO.

401-02841 12840-13

1/2" Drive 13-Piece Wheel Lock Removal Kit





# LUG NUT REMOVAL PRODUCTS // WHEEL SERVICE PRODUCTS 101



■ Wheel Lock Removal Kit, Lug Nut Removers

#### 1/2" DRIVE 9-PIECE WHEEL LOCK REMOVAL KIT

■ APPLICATION: For Ford, Chrysler & GM Vehicles as well as standard and oversized OEM and aftermarket wheel locks for other domestic and imported cars and light trucks



#### ASCOT NO. MFG. NO. DESCRIPTION

		KIT CONTENTS
401-02840	2840	9-Piece Wheel Lock Remover Kit
401-28401	28401	Individual Wheel Lock Remover for Ford and Chrysler Hubcap Locks
401-28402	28402	Individual Wheel Lock Remover for Ford Wheel Locks and 18mm GM Lug Nuts
401-28403	28403	Individual Wheel Lock Remover for Corvette, GM, N & F Body Wheel Locks
401-28404	28404	Individual Wheel Lock Remover for Oversize McGard Wheel Locks
401-28405	28405	Individual Wheel Lock Remover for McGard Wheel Locks & GM Hubcap Locks
401-28406	28406	Individual Wheel Lock Remover Extractor Punch
401-28407	28407	Individual Wheel Lock Remover for Chrysler Hubcap Locks
401-28408	28408	Individual Wheel Lock Remover for GM Hubcap Locks
401-28409	28409	Individual Wheel Lock Remover for GM Spline Hubcap Locks

ASCOT NO.	MFG. NO.	DESCRIPTION
401-02840	2840	Deluxe Hubcap Wheel Lock Removal System

#### CHROME LUG NUT **COVER REMOVER**

ASCOT NO. MFG. NO. 402-30606 30606

DESCRIPTION Chrome Lug Nut Cover Remover



#### COMMERCIAL TRUCK CHROMF I UG NUT PULL FR

Thick carbon steel material provides strength for heavy duty applications

■ Round shape handle provides comfort and ease of operation

 Suitable for all heavy duty truck lug nut applications ■ Two hole design can be switched to expand range and size of application ■ Coated jaws protect painted, aluminum or chrome plated lug nuts from damage



COATED TO **PREVENT DAMAGE** 

DESCRIPTION ASCOT NO. MFG. NO.

402-03116 202603-HD Commercial Truck Chrome Lug Nut Puller

**HEAVY DUTY PROFESSIONAL** CHROME NUT PULLER

 Coated to prevent scratching or damage to chrome, coated or painted lug covers

Cushioned grip to prevent slippage • NO ADJUSTMENT REQUIRED: Fits all 33mm & 11/2" covers ■ Similar to Ken Tool 30606



COATED TO **PREVENT** DAMAGE

DESCRIPTION



402-03116

402-03016

MFG. NO. 402-03016 202603

ASCOT NO.

Heavy Duty Professional Chrome Nut Puller with Cushion Handle



### Hub Centric Nut

# **Wheel Attaching Hardware**

#### **HUB CENTRIC NUT**

By filling the void between the stud hole, "clocking" is eliminated, and problems caused by clocking, such as wheel offs and wheel hub vibrations, are eliminated.


- Hub Centric Nut fills void standard flange nuts don't
- Stops rim from shifting forwards or backwards
- Eliminates "clocking" caused by standard wheel nuts not filling wheel hole completely
- Metric 2-piece hub centering nut
- Elongated neck for centering the wheel to the hub
- Certified American Steel
- Each part tested for thread, fit and finish
- QUANTITY: 50 per box


ASCOT NO. MFG. NO. DESCRIPTION
491-00133 | X10-PN22B | 33mm Hex X 1.5mm Thread






Void (Highlighted in Green) between stud and hole





#### WHEEL ASSEMBLY WITH HUB CENTRIC NUT

Hub Centric Nut fills void between stud and hole

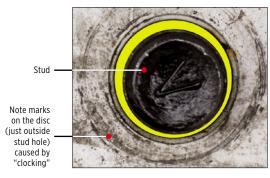

Yellow highlight shows void between stud and stud hole

> Hub Centric Nut fills void between stud and hole



This nut had been torqued to specifications and retorqued per factory settings.

# WHEEL ATTACHING HARDWARE // WHEEL SERVICE PRODUCTS 103

Skirt Nuts, Grade 8 Disc Wheel Hardware Cap Nuts



#### 33MM SKIRT NUT

#### Original Skirt Nut

Replaces standard M22 flange nuts on 11.25" hubpiloted wheels - Partially penetrates the stud hole and prevents clocking and vibration



491-01133

• QUANTITY: 100 per case

ASCOT NO. MFG. NO. DESCRIPTION 491-01133 SN-M22 33mm Skirt Nut

#### **SKIRT NUT**

Stops wheel/hub vibrations and many tire wearing problems • Stops wheel movement (clocking) on the face of the hub • Eliminates wasted fuel caused by rolling resistance or "drag" ■ Meets and exceeds standards of SAE J1965 for torque tension



491-02906

491-02919

■ Replaces all style M22 flange nuts on hub-piloted wheel ■ Hex: 33mm ■ Special graphite coating prevents nut from rusting onto the hub • Fills in the gap between the stud and the bolt 3/16" (5mm) **■ 25 per box** 



491-02928

Extended threading allowing Skirt Nut to go down into **Hub-Piloted Disc** Wheel an extra 3/16" (5mm) into stud hole





491-02939

ASCOT NO.	MFG. NO.	DESCRIPTION
491-02906	GL-2906	6mm Designed for Steel - Steers
491-02919	GL-2919	19mm Designed for Aluminum - Steers, Steel/ Steel Drives, Steel Outer/ Alum. Inner - Drives
491-02928	GL-2928	28mm Designed for HD Aluminum, Super Single - Wide Base, Alum. Outer/ Steel Inner - Drives
491-02939	GL-2939	39mm Designed for Dual Aluminum - Drive Axle



There is a fairly large tolerance between the diameter of each stud hole and the diameter of the stud itself.

#### GRADE 8 DISC WHEEL HARDWARE-INNER CAP NUTS



491-01001





ASCOT NO. FOR SIRCO	SIRCO NO.	ASCOT NO. FOR GLP	GLP NO.		SIMIL	AR TO:	
491-00708	708AR	491-01001 (RH)	GL-1001	Budd 10708	Euclid 7895R	Leland W-11	Steel/Steel
491-00709	709AL	491-01002 (LH)	GL-1002	Budd 10709	Euclid 7895L	Leland W-12	Steel/Steel
491-00896	896R	491-01003 (RH)	GL-1003	Budd 35336	Euclid 7896R	Leland W-620	Steel /Alum
491-01896	896L	491-01004 (LH)	GL-1004	Budd 35337	Euclid 7896L	Leland W-621	Steel/Alum
491-00897	897R	491-01005 (RH)	GL-1005	Budd 22621	Euclid 7897R	Leland W-616	Steel/Alum
491-01897	897L	491-01006 (LH)	GL-1006	Budd 22622	Euclid 7897L	Leland W-617	Steel/Alum
491-00978	988R	491-01011 (RH)	GL-1011	Alcoa 5988R	Euclid 5988R	Leland W-486	Alum/Alum
491-01978	988L	491-01012 (LH)	GL-1012	Alcoa 5988L	Euclid 5988L	Leland W-487	Alum/Alum
				METRIC			
491-00306	306R	491-01009 (RH)	GL-1009	Hino 900423101	Isuzu 1-42335005 - Zinc		
491-01306	306L	491-01010 (LH)	GL-1010	Hino 900424101	Isuzu 1-42336005 - Zinc		

#### GRADE 8 DISC WHEEL HARDWARE-OUTER CAP NUTS



491-02001





ASCOT NO. FOR SIRCO	SIRCO NO.	ASCOT NO. FOR GLP	GLP NO.		SIMILAR TO:	
491-00891	891AR	491-02001 (RH)	GL-2001	Budd 37891	Euclid 5997R	Leland W-13
491-00892	892AL	491-02002 (LH)	GL-2002	Budd 37892	Euclid 5997L	Leland W-14
491-00888	888R	491-02101 (RH)	GL-2101	Budd 37888	Euclid 5652R	Leland W-15
491-00889	889L	491-02102 (LH)	GL-2102	Budd 37889	Euclid 5652L	Leland W-16
491-00995	995R	491-02103 (RH)	GL-2103	Alcoa 5995R	Euclid 5995R	Leland W-506
491-01995	995L	491-02104 (LH)	GL-2104	Alcoa 5995L	Euclid 5995L	Leland W-507
N/A	891BR	491-01891	GL-2004	TUDU UADDNECC CMC 7000C71		7000071
N/A	892BL	491-02892	GL-2003	THRU HARDNESS - GMC-3988631		
N/A	N/A	491-02203	GL-2203	Budd 95188	Euclid 9022R	Dodge 3637719
N/A	N/A	491-02204	GL-2204	Budd 95189	Euclid 9022L	Dodge 3637720
N/A	N/A	491-02202	GL-2202	Budd 81269	Euclid 5734	GMC 3771410
N/A	N/A	491-02303	GL-2303	Alca 389928	Ford E4tZ-1012A	N/A
				METRIC		
491-00304	304R	491-02009	GL-2009	Hino 900421112	Isuzu 1-42333023	Leland W-722/3
491-01304	304L	491-02010	GL-2010	Hino 900422104	Isuzu 1-42334023	Euclid 10254R/L
491-00033	333B	491-02301	GL-2301	Budd 106333	Euclid 6000A	Leland W-498
491-00881	881M	491-02302	GL-2302	MW 88881	Euclid 5991	Leland W-492

### 104 WHEEL SERVICE PRODUCTS // WHEEL ATTACHING HARDWARE

Mud Flap Bolt Kit, Spoke Wheel Hardware, Oil Seal Hubs & Gaskets, Cone Wheel Nuts, Brake Drum Mounting Hardware

# Wheel Attaching Hardware (cont.)

#### MUD FLAP BOLT KIT

■ All the hardware needed to attach mud flaps to trucks or trailers ■ INCLUDES: (4) 3/8"-16 x 1-1/4" bolts, (4) 3/8" Nuts, (8) 3/8" flat washers & (4) 3/8" lock washers



#### SPOKE WHEEL HARDWARE





491-03005

491-03002

ASCOT NO. FOR SIRCO	SIRCO NO.	ASCOT NO. FOR GLP	GLP NO.	THREAD	s	IMILAR TO	):
RIM CLAMP NUTS							
491-00149	149	491-03004	GL- 3004	5/8-11	Dayton 5149	Euclid 4962	Leland W-7
491-00716	716	491-03005	GL- 3005	3/4-10	Dayton 5716	Euclid 4963	Leland W-8
	RIM STUDS (GRADE 8)						
491-00654	654	491-03001	GL- 3001	5/8-11x2- 3/4	Dayton 6654	Euclid 4958	Leland W-5
N/A	N/A	491-03002	GL- 3002	3/4-10x3	Dayton 5715	Euclid 4956-A	Leland W-6

#### **LOCKING BACK NUTS**



ASCOT NO.	GLP NO.	SIZE	SIMIL	AR TO:
491-06023	GL-6023	5/8"-18	MW 85643	_
491-02431	GL-2431	7/8"-14	Budd 41073-8	Euclid 1835
491-02445	GL-2445	1"-14	Budd 44672-9	Euclid 1828

#### OIL SEAL HUBCAPS AND GASKETS

491-04009

ASCOT NO.	MFG. NO.	DESCRIPTION
491-04009	GL-4009	Standard 6-Hole Hubcap
491-04012	GL-4012	6-Hole Gasket for Above
491-04013	GL-4013	Universal Gasket - 5 or 6 Hole
491-04020	GL-4020	Replaceable Window Kit
491-04021	GL-4021	Rubber Plug for Bolt-On Cap
491-09013	GL-4913	Fruehauf/Propar Cap
491-09014	GL-4974	O-Ring for Screw-On Cap
491-09015	GL-4975	Rubber Plug for Screw-On Cap

#### **CONE WHEEL NUTS**

491-00014



L.H. 5/8"-18 (1" Hex, 21/32" High)

#### BRAKE DRUM MOUNTING HARDWARE

GL-0056



Budd 67147

491-06014

ASCOT NO.	MFG. NO.	SIZE	DESCRIPTION
491-06012	GL-6012	5/8-18 x 2"	5/8" Brake Bolt/Washer/Assembly
491-06014	GL-6014	3/4-16 x 2"	3/4" Brake Bolt/Washer/Assembly
491-06020	GL-6020	5/8-18 x 2"	Brake Bolt Only
491-06021	GL-6021	3/4-16 x 2"	Brake Bolt Only
491-06025	GL-6025	5/8"	Flat Washer
491-06026	GL-6026	3/4"	Flat Washer
491-06023	GL-6023	5/8"-18"	Lock Nut Only
491-06024	GL-6024	3/4"-16"	Lock Nut Only



# WHEEL ATTACHING HARDWARE // WHEEL SERVICE PRODUCTS 105

Rim Clamps, Wheel Guard, Wheel Shield, Wheel Protectors, Installation Tool

#### **RIM CLAMPS**







491-03097

491-03113

491-06115

ASCOT NO. FOR SIRCO	SIRCO NO.	ASCOT NO. FOR GLP	GLP NO.	A DIM.	B. DIM.	C. DIM.	S	IMILAR TO	):
491-00399	399	491-03083	GL-3083	N/A	N/A	N/A	Dayton 8399	Euclid 5927	Leland W-124
491-00729	729	491-03087	GL-3087	N/A	N/A	N/A	Dayton 09- 729514	Euclid 5838	Leland W-407
491-00123	123	491-03096	GL-3096	1-1/8"	2-7/8"	2-11/32", 3/4" Stud	Dayton 6123	Euclid 5571A	Leland W-3
491-00235	235	491-03097	GL-3097	1-3/4"	2-7/8"	2-11/32", 3/4" Stud	Dayton 6235	Euclid 5572A	Leland W-4
491-00993	993	491-03098	GL-3098	1-1/2"	2-7/8"	2-11/32", 3/4" Stud	Dayton 6993	Euclid 5040A	Leland w-120
N/A	N/A	491-03099	GL-3099	2-1/8"	2-7/8"	2-11/32", 3/4" Stud	Dayton 705317	Euclid 5786	Leland W-403
N/A	N/A	491-03101	GL-3101	1-7/8"	2-7/8	2-11/32", 3/4" Stud	Dayton 851817	Webb 16124	Leland W-404
N/A	N/A	491-03103	GL-3103	1-1/4"	2-7/8"	2-11/32", 3/4" Stud	Dayton 8708	Euclid 5784	Leland W-405

ASCOT NO. FOR SIRCO	SIRCO NO.	ASCOT NO. FOR GLP	GLP NO.		SIMILAR TO:	
491-00257	257	491-03113	GL-3113	Mack 15QJ-17P1	Euclid 5828	Leland W-450
491-00238	238	491-03271	GL-3271	Mack 15QJ-223BP8	Euclid 5781	Leland W-448
491-00233	233	491-03279	GL-3279	Mack 15QJ-223BP3	Euclid 5821	Leland W-467
N/A	N/A	491-06115	GL-6115	Kelsey 79954	N/A	N/A

#### **STANDARD** WHEEL RIM **GUARD**

#### APPLICATION:

Protects aluminum. chrome and painted truck rims/

wheels during stud and nut removal

■ Inexpensive ■ Tough polymer design

ASCOT NO. 402-50301 MFG NO 53010

DESCRIPTION Standard Wheel Rim Guard

402-50301



The standard wheel rim guard in use.

#### **ALUMINUM** WHEEL SHIELD

APPLICATION:

Covers entire wheel while changing tires • Protects

aluminum wheel surface from ground • Torque sequence imprint

ASCOT NO. 402-50200

MEG NO DESCRIPTION 52000

Aluminum Wheel Shield

402-50200



The aluminum wheel shield in use.



#### **INSTALLATION TOOL** FOR ALCOA HUB **COVER SYSTEMS**

■ APPLICATION: For use with Alcoa 076185, 077185, 076188 & 077188 Hub Systems



ASCOT NO.	ı
491-00600	۱,

MFG. NO. 600

DESCRIPTION Installation Tool

for Alcoa Hub Cover Systems

Discmate

**Protectors** 

Wheel



#### **DISCMATE WHEEL PROTECTORS**

Used to protect the wheel's mounting surface from cosmetic damage during use

Placed between the wheel and it's

mounting surface on the vehicle and may also

be used between 2 dualed wheels for added protection ■ Wheel nuts should always be tightened to the correct torque following the wheel manufacturer's specifications

	ASCOT NO.	MFG. NO.	DESCRIPTION
•	402-11000	11000	10-Hole 285.75mm, Hub Pilot, 22mm Studs
•	402-17000	17000	10-Hole 11-1/4" Stud- Pilot, 1-1/8" Studs
-	402-18000	18000	10-Hole 335mm, 32mm Cap Nuts, 22mm Studs



# 106 WHEEL SERVICE PRODUCTS // TIRE & WHEEL SERVICE TOOLS

■ Wheelok Systems for Heavy Duty Vehicles, Autos & Light Trucks

# **Tire & Wheel Service Tools**

# WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES

■ **APPLICATION:** For trucks, tractors or trailers with spoke (Dayton) Wheels





401-10431

ASCOT NO.	MFG. NO.	DESCRIPTION
401-10431	X10-DN43Z	Wheelok Nut & Free Spinning Sleeve - 2 Recommended For Each Wheel to Replace 2 Regular Nuts
401-10430	X10-DK43Z	Wheelok Key With Replaceable Pin - "Combination" Determined By Position Of Pins

# WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES

■ **APPLICATION:** For trucks, tractors or trailers with Budd Unimount<sup>™</sup> Wheels





	ASCOT NO.	MFG. NO.	DESCRIPTION
	401-10220	X10-UN22Z	Wheelok Nut, Flange and Free Spinning Sleeve - Combined Into One Single Unit
	401-10221	X10-UK22Z	Wheelok Key with Replaceable Pin - "Combination" Determined By Position Of Pins

# WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES: FRONT WHEELS

■ APPLICATION: For trucks, tractors or trailers with disc (Budd) Wheels; For truck or tractor front wheels

ASCOT NO.	MFG. NO.	DESCRIPTION
401-10160	X10-BN16Z	Wheelok Nut & Free Spinning Sleeve - Right-Hand Thread - 2 For Each Wheel To Replace 2 Regular Nuts
401-10170	X10-BN17Z	Wheelok Nut & Free Spinning Sleeve - Left-Hand Thread - 2 for Each Wheel to Replace 2 Regular Nuts


# WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES: REAR WHEELS

 APPLICATION: For trucks, tractors or trailers with disc (Budd) Wheels; For truck or tractor rear wheels

ASCOT NO.	MFG. NO.	DESCRIPTION	
401-10280	X10-BN28Z	Wheelok Nut Only - Right Hand Thread - 2 For Each Wheel To Replace 2 Regular Nuts	
401-10290	X10-BN29Z	Wheelok Nut Only - Left Hand Thread - 2 For Each Wheel To Replace 2 Regular Nuts	
401-10810	X10-BK81Z	Wheelok Key With Replaceable Pin - "Combination" Determined By Position Of Pins	

# WHEELOK SYSTEMS FOR AUTOS & LIGHT TRUCKS

■ EACH KIT INCLUDES: 4 nuts (1 for each wheel) and 1 key ■ Available for American vehicles and imports ■ Combination determined by order of pins





	MFG. NO.	
401-10000	X10-SS00C	Wheelok System fo autos & light trucks



# TIRE & WHEEL SERVICE TOOLS // WHEEL SERVICE PRODUCTS 107



Rib Nut Salvage Tool Kit, Hex Nut Remover Kits, Stud Installers & Removers, Square Head Adapter, Drive-On Rib-Grip Lug-Off Kits

#### **RIB NUT SALVAGE TOOL KIT**

■ INCLUDES: (1) Drift Pin, (1) Salvage Cylinder, (1) LH Thread Bolt, (1) RH Thread Bolt

ASCOT NO.	MFG. NO.	DESCRIPTIO

499-10150 X10-LS15B Rib Nut Salvage Tool Kit



#### 3-PIECE HEX NUT REMOVER KITS



492-15000

ASCOT NO.	MFG. NO.	DESCRIPTION
492-15000	X10-NR15B	1-1/2" Hex Nut Remover Kit - 3 Piece
492-14000	X10-NR14B	1-1/4" Hex Nut Remover Kit - 3 Piece

#### STUD INSTALLERS



492-10158



492-10134

ASCOT NO.	MFG. NO.	DESCRIPTION
492-10134	X10-SI34Z	For 3/4" Studs. Fits 1-3/4" Socket
492-10150	X10-LC15B	Rib Nut Salvage Cylinder
492-10158	X10-SI58Z	For 5/8" Studs. Fits 1-1/4" Socket
492-10159	X10-SI59Z	For 5/8" x 18 Studs. Fits 1-1/4" Socket
492-10196	X10-SI96Z	For 9/16" x 18 studs. Fits 1-1/4" Socket
492-10590	X10-SI59Z	5/8"- 18 Stud Installer

#### STUD REMOVERS

ASCOT NO.	MFG. NO.	DESCRIPTION
492-10340	X10-SR34B	For 3/4" Studs. Fits 1-3/4" Socket
492-10580	X10-SR58B	For 5/8" Studs. Fits 1-1/4" Socket
492-10180	X10-SR18B	For 1-1/8" Studs. Fits 1-1/4" Socket
492-10780	X10-SR78B	For 7/8" Studs. Fits 1-1/4" Socket

#### 13/16" SQUARE HEAD ADAPTER



49	y.	·IU	113	U

ASCOT NO. MFG. NO.		DESCRIPTION	
499-10130	X10-SA13B	Fits 1-1/2" Socket Wrench to Speed Up Installing Or Removing Budd Wheel Inner Cap Nuts	
499-10171	X10-SA17B	17mm Stud Adapter	
499-10210	X10-SA21B	21mm Stud Adapter	

#### **HEAVY DUTY DRIVE-ON** RIB-GRIP LUG-OFF KITS



ASCOT NO.	MFG. NO.	DESCRIPTION	
499-10200	X10-LT20B	For Removing Damaged Inner Cap Nuts (1-1/8" Dia 13/16" Square Head) INCLUDES: (1) Drive-On Tool And (1) Rib Nut	
499-10340	X10-LT34B	For Removing Damaged 3/4" Lug Studs. INCLUDES: (1) Drive-On Tool And (1) Rib Nut	
499-10580	X10-LT58B	For Removing Damaged 5/8" Lug Studs. INCLUDES: (1) Drive-On Tool, (1) Rib Nut	
499-10660	X10-LT66B	Triple Duty Tool For Removing Damaged Budd Wheel Inner Cap Nuts, 3/4" And 5/8" Lug Studs. INCLUDES: (1) Drive-On Tool and (3) Rib Nuts	

#### REPLACEMENT RIB NUTS

ASCOT NO.	MFG. NO.	DESCRIPTION
499-10180	X10-LN18B	For Budd Wheel Inner Cap Nuts
499-10341	X10-LN34B	For 3/4" Lug Studs
499-10581	X10-LN58B	For 5/8" Lug Studs
499-10211	X10-LN21B	For 21mm Lug Studs
499-11171	X10-LN17B	For 17mm Lug Studs
492-10151	X10-LP15Z	Drive Pin

Please contact us for more information regarding Tire & Wheel Service Tools





# 108 WHEEL SERVICE PRODUCTS // TIRE & WHEEL SERVICE TOOLS

Spare Tire Tool Set, Thread Pitch Gauge, Rim Flange Wear Gauge, Chamfer/Nut Gauge

### Tire & Wheel Service Tools (cont.)

#### 7-PIECE SPARE TIRE TOOL SET

Allows anyone to quickly remove difficult to reach spare tires • No more digging through the customer's vehicle to locate the spare tire removal kit - Color-coded wall bracket allows user to quickly identify the correct removal tool APPLICATION: Includes many trucks & SUV's

where the spare tire is

located under the vehicle




96090A

ASCOT NO.

319-96090

MFG. NO. DESCRIPTION 7-Piece Spare Tire Tool Kit

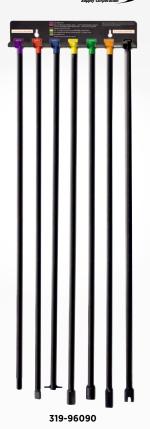

DESCRIPTION ASCOT NO. MFG. NO.

	INDIVIDUAL SPARE TILE TOOLS		
319-96091	96091	Spare Tire Tool - Flat Head: Red APPLICATION: For Use on Late Model S10 trucks, Explorers, Blazers, Jimmys, F150s, Expeditions, Older Dakota 2-Wheel Drives and McGuard Lock Systems	
319-96092	96092	Spare Tire Tool - Pin Head: Blue APPLICATION: For Use on Import Trucks	
319-96093	96093	Spare Tire Tool - Hex Head: Yellow APPLICATION: For Use on Dodge Full Size and Stake Bodies, '98-'01 Dodge Full-Size 4-Wheel Drive	
319-96094	96094	Spare Tire Tool - 12mm Square Head: Green APPLICATION: For Use on All Late Model GMs, Remaining '98-'03 Dodge Trucks	
319-96095	96095	Spare Tire Tool - Std. Square Head: Orange APPLICATION: For Use on Older Ford Trucks	
319-96096	96096	Spare Tire Tool - Slotted Square Head: Black APPLICATION: For Use on Dodge Durango, Inside the Hatch	
319-96097	96097	Wall Mount Bracket for Spare Tire Tool Set Color-coded to allow user to quickly identify the correct removal tool	
319-96098	96098	Spare Tire Tool - 3/8" Square Head: Purple APPLICATION: For Use on New Ford Models	

#### ALCOA RIM FLANGE **WEAR GAUGE**

■ Determines if wheel must be removed from service due to excessive rim flange wear

MFG. NO. ASCOT NO.

401-00700

000700

Alcoa Rim Flange Wear Gauge

DESCRIPTION





M22 X 1.5 Thread Pitch

#### UNI-MOUNT M22 THREAD PITCH GAUGE

**APPLICATION:** 

Designed

for M22 x 1.5 Uni-Mount

Studs If the thread teeth do not fully engage the stud, the stud should be removed from service ■ Simple to use

ASCOT NO. MFG. NO. DESCRIPTION

401-69260 69260 Uni-Mount Thread Gauge



#### CHAMFER/NUT GAUGE

Kit shows when wheel chamfers and wheel nuts are worn out • Visual guide detects excessive wear in bolt holes

APPLICATION: For use with steel stud piloted wheels





ASCOT NO MFG. NO. DESCRIPTION 401-69290 69290 Chamfer Nut Gauge

For **Penetrants**, please see Tire & Wheel Service section





# TIRE & WHEEL SERVICE TOOLS // WHEEL SERVICE PRODUCTS 109

Portable Truck Wheel Stud Installer & Remover. Wheel Installation Sleeves, Stud Cleaning Tools



#### PORTABLE TRUCK WHEEL STUD REMOVER & INSTALLER

- Power of a 10-ton shop press
- Remove and install studs without removing the hub ■ Two-hour job is done in twenty minutes without risk of damaging seals or bearings
- Any mechanic can use it to get the job done right in minutes





ASCOT NO.	MFG. NO.	DESCRIPTION
492-06247	6247	PakPress Cart
492-06346	6346	Complete PakPress Kit - Includes Cart



#### ALCOA WHEEL **INSTALLATION SLEEVES**

■ Align wheel bolt holes ■ Seat brake drums that have .980" diameter bolt holes ■ Prevent damage to M22x1.5 studs ■ Assist in lining up all components for ease of install • INCLUDES: 2 tools per kit • Made in USA



491-00426

ASCOT NO. 491-00426

MFG. NO. 407422

DESCRIPTION Alcoa Wheel

Installation Sleeves

# Stud and Brake Hub **Cleaning Tools**

#### STUD CLEANING TOOLS

■ Allows for cleaning the full length of the thread on 10 studs in less than 3 minutes ■ Works with air or hand tools • CAUTION: Always use eye protection ■ 1/2" adapter included with each tool ■ Replacement

Brushes Available




	WORKS	
	WITH AIR	
•	<b>OR HAND</b>	
	TOOLS	

ASCOT NO.	MFG. NO.	DESCRIPTION
402-00013	SBCT-13	13mm (1/2") Stud Cleaning Tool
402-00022	SBCT-22	22mm (7/8") Stud Cleaning Tool
402-00028	SBCT28	28mm (1-1/8") Stud Cleaning Tool

ASCOT NO.	MFG. NO.	DESCRIPTION
402-00013	SBCT-13	13mm (1/2") Stud Cleaning Tool
402-00022	SBCT-22	22mm (7/8") Stud Cleaning Tool
402-00028	SBCT28	28mm (1-1/8") Stud Cleaning Tool

MFG. NO. DESCRIPTION

402-00112       SBR12       12mm (7/16") Repl. Brush         402-00113       SBR13       13mm (1/2") Repl. Brush         402-00014       SBR14       14mm (9/16") Repl. Brush         402-00016       SBR16       16mm (5/8") Repl. Brush         402-00118       SBR18       18mm (45/64") Repl. Brush         402-00120       SBR20       20mm (25/32") Repl. Brush	REPLACEM	ENT BRUSH	IES FOR STUD CLEANING TOOLS
402-00014         SBR14         14mm (9/16") Repl. Brush           402-00016         SBR16         16mm (5/8") Repl. Brush           402-00118         SBR18         18mm (45/64") Repl. Brush           402-00120         SBR20         20mm (25/32") Repl. Brush	402-00112	SBR12	12mm (7/16") Repl. Brush
402-00016         SBR16         16mm (5/8") Repl. Brush           402-00118         SBR18         18mm (45/64") Repl. Brush           402-00120         SBR20         20mm (25/32") Repl. Brush	402-00113	SBR13	13mm (1/2") Repl. Brush
402-00118         SBR18         18mm (45/64") Repl. Brush           402-00120         SBR20         20mm (25/32") Repl. Brush	402-00014	SBR14	14mm (9/16") Repl. Brush
<b>402-00120</b> SBR20 20mm (25/32") Repl. Brush	402-00016	SBR16	16mm (5/8") Repl. Brush
	402-00118	SBR18	18mm (45/64") Repl. Brush
400 00000 00000 000 (7/00) 0 1 0 1	402-00120	SBR20	20mm (25/32") Repl. Brush
<b>402-00122</b>   SBR22   22mm (7/8") Repl. Brush	402-00122	SBR22	22mm (7/8") Repl. Brush
<b>402-00128</b> SBR28 28mm (1-1/8") Repl. Brush	402-00128	SBR28	28mm (1-1/8") Repl. Brush



Before

Replacement **Brush for Stud Cleaning Tool** 







# 110 WHEEL SERVICE PRODUCTS // TIRE & WHEEL SERVICE TOOLS

Stud Cleaning Kit, Hub Buddy Tool, Wheel Hub Grinder, Brake Hub Cleaning Discs

# Stud and Brake Hub Cleaning Tools (cont.)



#### KIT CONTENTS

KII CUI	IIENIS
SBCT22 with a SBR22 brush	2 hex keys
Safety glasses	REPLACEMENT BRUSHES: SBR
2 adapters	12,13,14,16, 18, 20 and 22mm

402-37330

 ASCOT NO.
 MFG. NO.
 DESCRIPTION

 402-01322
 SKT-1322
 Stud Cleaning Kit

#### **HUB BUDDY TOOL**

■ IMPACT RATED: No need to change tools - Complies with best practice R.I.S.T. procedure - Removes rust, corrosion and other build-up from wheel stud, drums and tire rim ■ Helps proper torque of lug nuts by removing corrosion A must for easy and accurate tire balancing ■ INCLUDES: 1 Hub Buddy XL attachment and 1 cleaning disc head • Replacement cleaning discs available in packs of 6 (Product # 402-37335)



#### WHEEL HUB GRINDER

 Special grinder for cleaning the wheel centering device as well as the attachment area between the wheel and hub

 Burned in corrosion residues are completely removed in a quick and easy process

 Actual cleaning time per hub only takes between 3-25 seconds depending upon residue thickness

■ Replacement Discs Available



402-43351

ASCOT NO.	MFG. NO.	DESCRIPTION
402-43352	433 502/M	Wheel Hub Grinder
402-43351	433 501	Grinder Replacement Discs (3 per package)





Wheel Hub Grinder in action.

# 3M BRAKE HUB CLEANING DISCS

■ Extremely tough three-dimensional web ■ Non-metallic attachment system and disc pad holder ■ Roloc disc locks securely; 1/2 turn on, 1/2 turn off ■ Ideal for use on right angle air tools ■ KIT CONTAINS: 5 Scotch-Brite Roloc Brake Hub Cleaning Discs and 1 3M Brake Hub Cleaning Disc Holder



ASCOT NO.	MFG. NO.	DESCRIPTION
402-07545	07545	3M Brake Hub Cleaning Disc Holder
402-07546	07546	3M Scotch-Brite Roloc Brake Hub Cleaning Discs - 10 Discs
402-07547	07547	3M Scotch-Brite Roloc Brake Hub Cleaning Disc Kit

