



RUBBER-INC.

8/1/17

Warehouse Distributor of:

- Tire Equipment
- Valve Stems & Hardware
- Wheel Balancing Products
- Tire Repair Materials

Coats Tire Changers


Model No. GTS-70

Specifications:

Max Rim Width: 15"
 Max Tire Diameter: 44"

The Coats GTS-Series Tiltback Tire Changers feature an innovative design with the reliability and durability of the Coats brand. Built-in features increase the convenience of having all the power you need in one machine.

Features a two-speed electric motor, powered roller disk (for bead loosening, TPMS access, bottom bead removal and top bead mounting), Robo-Assist, Grip Max Clamps, Single Point Sealer, and hand actuated Bead Loosener. Wheel Lift optional.

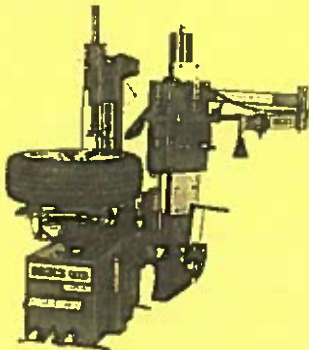

Call for quote!

Model No's.

70XEF3 / 70XAF3
 70XEH3 / 70XAH3

The 70X3 Rim Clamp Tire Changer features Best-In-Class Clamping Capacity (external clamping from 6" to 28" with Grip Max Plus clamp upgrade), Patented Robo-Arm Helper Device to efficiently change low profile or run flat tires, and a Hybrid Duckhead Mount/Demount tool combining advantages of plastic and metal heads.

Includes: Cabinet, upgraded high spoke mount/demount head, duck head roller, grip max clamps, plastic protectors for clamps – bead loosener and lift tool, lube and lube bucket bracket.



Call for quote!

Model No. RC-45E

Specifications:

Clamping Range: 10"-24" Ext.
 Max Rim Width: 10-1/2"
 Max Tire Diameter: 50"

Call for quote!



The Coats RC-45 is perfect for today's high speed, general service repair shop. Built to execute day after day. Features built-in bead sealing jets, a high torque X-shaped turntable, manual swing arm, conveniently placed foot pedals, and an inflation gauge.

Model RC-55E

Specifications:

Clamping Range: 6"-24" Ext.
 Max Rim Width: 10-1/2"
 Max Tire Diameter: 50"

Call for quote!



The Coats RC-55 Rim Clamp Tire Changer is built upon the high standards of the legendary Coats Rim Clamp tire changer. The RC Robo-Arm keeps the top bead in the drop center during mounting, allowing technicians to change difficult wheels with ease.

Chicago
 Sales & Distribution
 2419 S. Michigan Ave.
 Chicago, IL 60616

P: 312-225-6162
 800-621-1563
 F: 312-225-7642

Wisconsin
 Sales & Distribution
 N6673 State Highway 25
 Durand, WI 54736

P: 715-283-4263
 800-826-7106
 F: 715-283-4911

St. Louis
 Distribution
 1238 Hanley Industrial Ct.
 St. Louis, MO 63144

P: 314-918-8932
 F: 314-918-1349

Indiana
 Sales

P: 800-248-6162

Prices in effect while quantities last or until 9/29/17

www.rubber-inc.com



RUBBER-INC.

8/1/17

Warehouse Distributor of:

- Tire Equipment
- Valve Stems & Hardware
- Wheel Balancing Products
- Tire Repair Materials

Coats Wheel Balancers

1300 Wheel Balancer

Specifications:

Balancing Modes: 8
Tire Diameter: Up to 44"
Wheel Width: 2" to 20"
Max Tire Weight: 150 Lbs.
Shaft Diameter: 40mm
Power Requirement: 220v/1PH
 220v/3PH



Call for quote!

Features Include: Coats Direct Drive System (a combined motor and spindle pre-balanced assembly that always stays calibrated to zero), Behind-The-Spoke Tape on Weight Placement (making it faster and easier to keep the wheel weights hidden from view) and Static-On-Screen (which simultaneously displays both static and dynamic unbalance data).

1500 Wheel Balancer

Specifications:

Balancing Modes: 8
Tire Diameter: Up to 44"
Wheel Width: 2" to 20"
Shaft Diameter: 40mm
Power Requirement: 220v/1PH
 220v/3PH

Call for quote!

The new Coats 1500 Direct Drive Wheel Balancer features legendary reliability with state of the art capability.

The 1500is powered by Direct Drive (a combined motor and spindle pre-balanced assembly that always stays calibrated at zero). Other features include laser guided operation, stop and lock and 8 double sided collets.



1600 Wheel Balancer



Specifications:

Balancing Modes: 8
Tire Diameter: Up to 44"
Wheel Width: 2" to 20"
Max Tire Weight: 160 Lbs.
Shaft Diameter: 40mm
Power Requirement: 220v/1PH
 220v/3PH

Call for quote!

Features Include: Direct Drive System (a combined motor and spindle pre-balance assembly that always stays calibrated to zero), ProBalance Technology (which minimizes both static and couple unbalance), and Touchscreen weight recognition system for touch-free operation for 85% of wheel balances.

Recommended Optional Accessories

#85610104 – 3,4,5 Lug Adjustable Pin Plate Set features one system to properly balance a wide variety of tire and wheel assemblies. Combines 15 plates into one convenient solution!



#8113277C – Improved Light Truck Cone Kit (40mm) features a double sided cone and metal backing plate. Range: 4.8" – 6.8".

Prices in effect while quantities last or until 9/29/17

Chicago
 Sales & Distribution
 2419 S. Michigan Ave.
 Chicago, IL 60616

P: 312-225-6162
 800-621-1563
 F: 312-225-7642

Wisconsin
 Sales & Distribution
 N6673 State Highway 25
 Durand, WI 54736

P: 715-283-4263
 800-826-7106
 F: 715-283-4911

St. Louis
 Distribution
 1238 Hanley Industrial Ct.
 St. Louis, MO 63144

P: 314-918-8932
 F: 314-918-1349

Indiana
 Sales
 P: 800-248-6162

www.rubber-inc.com