
Air Tools •

Impact Wrenches | Sanders | Air Ratchets | Tire Buffers Grinders | Drills | Air Hammers | Finishing Tools Cordless Tools | Air Tool Accessories | Work Stations



Advanced Wheel Solutions

One-Stop-Shop for all your Tire Changing Needs!

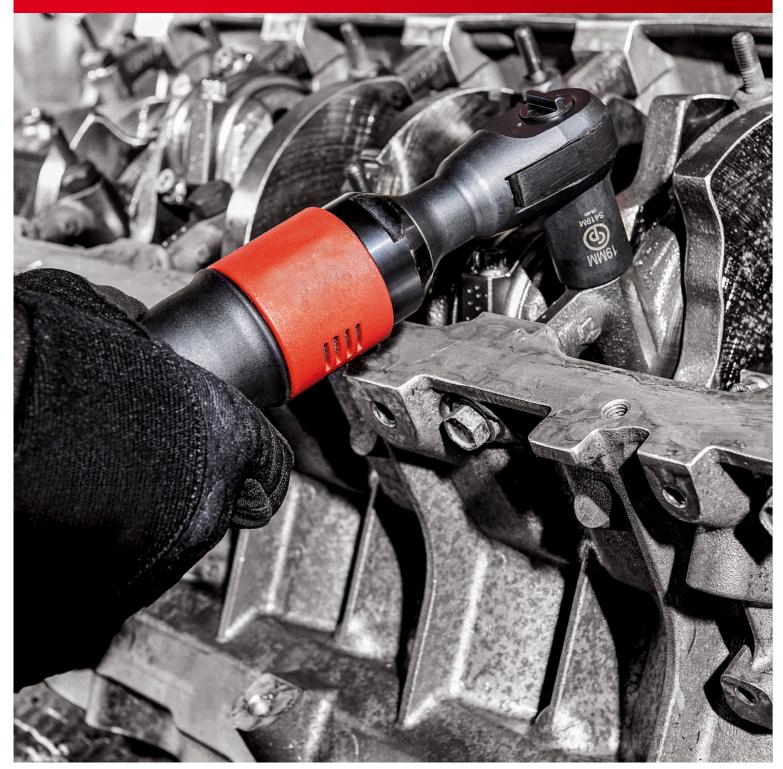

People.
Passion.
Performance.




WORLD'S FIRST CORDLESS 1" D-HANDLE IMPACT WRENCH



DRIVEN TO OUTPERFORM.

M18 FUEL™ is engineered for the most demanding diesel technicians in the world. M18 FUEL™ delivers unrivalled performance in a compact structure and features three MILWAUKEE® exclusive innovations — the POWERSTATE™ Brushless Motor, REDLITHIUM™ Battery Pack and REDLINK PLUS™ Intelligence Hardware and Software — that deliver unmatched power, run-time and durability. Simply put, M18 FUEL™ is best-in-class, full-circle technology that drives, protects and powers your cordless power tools beyond the rest.

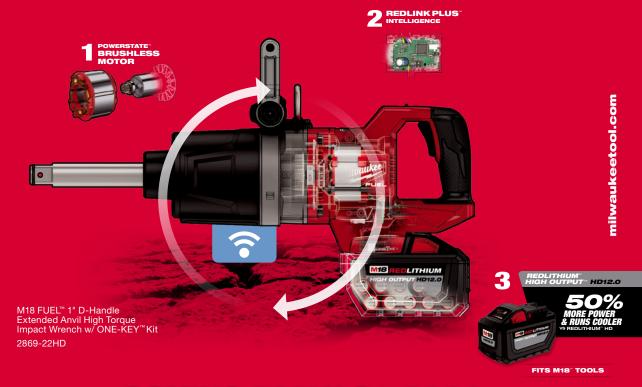

COMING EARLY Q4 2020



M18
PERFORMANCE DRIVEN
TRADE FOCUSED
SYSTEM WIDE





Quick Reference Chart (CP)

Impact Wrenches (CP) (©



QUICK REFERENCE CHART

CP No.	Ascot No.	Sq. Drive (mm)	Std Bolt Size (mm)	Net Weight lb. (kg)	Average Air Cons. (cfm)	Air Inlet (NPTF)	Min. Hose Size	Working Torque Range ft./lb. (NM)	Max Torque ft./ lb. (NM)
CP7722	152-07722	3/8" (10)	3/8" (10)	2.09 (0.95)		1/4"	1/4"	5-65 (7-88)	90 (120)
СР724Н	152-00724	3/8" (10)	3/8" (10)	3.1	1.7	1/4"	3/8"	68 - 190 (92 - 257)	200 (271)
CP7727	152-07727	3/8" (10)	3/8" (10)	2.5 (1.12)	4	1/4"	3/8"	20-142(26-192)	185 (250)
CP7729	152-07729	3/8" (10)	3/8" (10)	2.78 (1.25)	5	1/4"	3/8"	50-300 (68-407)	415 (563)
СР734Н	153-00734	1/2" (13)	9/16" (15)	5.1 (2.31)	3.75	1/4"	3/8"	25-310 (34-420)	425 (576)
CP7736	153-00736	1/2" (13)	9/16" (15)	5.70 (2.58)	4.4	1/4"	3/8"	51-568(69-770)	665 (901)
CP7736-2	153-07336	1/2" (13)	9/16" (15)	6.5 (2.9)	4.4	1/4"	3/8"	51-568(69-770)	665 (901)
CP7737	153-07737	1/2" (13)	9/16" (15)	2.5 (1.13)	4	1/4"	3/8"	25-165 (34-224)	220 (300)
CP7748	153-07748	1/2" (13)	9/16" (15)	4.6 (2)	6.2	1/4"	3/8"	75-580 (102-786)	960 (1300)
CP7748-2	153-77482	1/2" (13)	9/16" (15)	5.1 (2.4)	6.2	1/4"	3/8"	75-580 (102-786)	960 (1300)
CP749	153-07492	1/2" (13)	5/8" (16)	5.25 (2.5)	5.5	1/4"	3/8"	50-450 (68-610)	610 (827)
CP749-2	156-07992	1/2" (13)	5/8" (16)	5.5 (2.5)	5.75	1/4"	3/8"	50-450 (68-610)	610 (827)
CP7640-6	155-07640	1/2" (13)	5/8" (16)	25.55 (11.6)	4.8	1/2"	1/2"	370 - 1475 (500 - 2000)	1920 (2600)
CP7749	153-07749	1/2" (13)	5/8" (16)	4.37 (1.98)	4.8	1/4"	3/8"	75-580 (102-428)	955 (1295)
CP7749-2	153-77492	1/2" (13)	5/8" (16)	4.5 2.04)	4.8	1/4"	3/8"	75-580 (102-428)	955 (1295)
СР772Н	154-00772	3/4" (18)	1-1/8" (28)	10.1 (4.8)	6	3/8"	1/2"	150-700 (203-949)	1000 (1356)
СР772Н-6	154-01772	3/4" (18)	1-1/8" (28)	11.63 (5.28)	6	3/8"	1/2"	150-700 (203-949)	1000 (1356)
CP7763D	154-27763	3/4" (18)	1-1/8" (28)	14.3 (6.5)	41	1/2"	3/8"	250-1070 (340-1450)	1300 (1760)
CP7763D-6	154-37763	3/4" (18)	1-1/8" (28)	16.1 (7.3)	42	1/2"	3/8"	250-1070 (340-1450)	1300 (1760)
CP7769	154-07769	3/4" (18)	1-1/8" (28)	6.9 (3.15)	4.8	3/8"	1/2"	300 - 1080 (407 - 1464)	1140 (1950)
CP7769-6	154-77696	3/4" (18)	1-1/8" (28)	8.3 (3.75)	4.7	3/8"	1/2"	300 - 1080 (407 - 1464)	1140 (1950)
CP7773D	155-07773	1" Square	1-1/4" (32)	12.1 (5.5)	10.5	3/8"	1/2"	250-1070 (340-1450)	1300 (1760)
CP7773D-6	155-77736	1" Sq. 6" Ext	1-1/4" (32)	16.3 (7.4)	10.5	3/8"	1/2"	250-1070 (340-1450)	1300 (1760)
CP7778	155-07778	1" Square	1-1/4" (32)	22.5 (10.1)	8.7	1/2"	1/2"	100-1100 (136-1491)	1620 (2196)
CP7778SP-6	155-27786	1" Square	1-1/4" (32)	25.4	4.1	1/2"	1/2"	300 - 1,330 (400-1800)	1620 (2200)
CP7782	155-07782	1" Short Anvil	1-1/4" (32)	22.2 (10.1)	4.8	1/2"	1/2"	370 - 1475 (500 - 2000)	1920 (2603)
CP7782-6	155-77786	1" Sq. 6" Ext	1-1/4" (32)	25.4 (11.5)	10	1/2"	1/2"	370-1475 (501-2000)	1920 (2603)
CP7782SP-6	155-17786	#5 Spl. 6" Ext.	1-1/4" (32)	25.4	10	1/2"	1/2"	370-1475 (501-2000)	1920 (2603)
CP7783	155-07783	1" Square	1- 1/4" (32)	18.5	10.1	1/2"	1/2"	413-1253 (560-1700)	1770 (2400)
CP7783-6	155-77836	1" Square	1- 1/4" (32)	20.9	10.1	1/2"	1/2"	413-1253 (560-1700)	1770 (2400)
CP797	155-07971	1" Square	1-1/4" (32)	27 (12.3)	12	1/2"	1/2"	150-900 (200-1225)	1400 (1898)
CP797-6	155-07976	1" Sq 6" Ext.	1-1/4" (32)	29.75 (13.5)	10	1/2"	1/2"	150-900 (200-1225)	1400 (1898)
CP797-SP6	155-79715	#5 Spl. 6" Ext.	1-1/4" (32)	29.75 (13.5)	10	1/2"	1/2"	150-900 (200-1225)	1400 (1898)
CP5000	155-50000	1" Square	1-1/4" (32)	30.5 (13.83)	11.88	1/2"	1/2"	370-1600 (502-2169)	2000 (2712)
CP897-6	155-08676	1" Square	1-1/4" (32)	19 (8.62)	6.5	1/2"	1/2"	150-800 (203-1085)	1300 (1763)

3/8"& 1/2" Impact Wrenches



Impact Wrenches (CP)

3/8" HEAVY DUTY AIR **IMPACT WRENCH**

One hand push button forward/reverse power regulator ■ Handle exhaust directs air away from the work area ■ 360° air inlet swivel prevents hose kinks - APPLICATIONS: general repair, transmission work, exhaust systems and body shops

■ ULTIMATE TORQUE: 200 ft./lb.

ASCOT NO. 152-00724

MFG. NO. CP724H



3/8" SUPER DUTY **ANGLE IMPACT** WRENCH

- High Durability Compact
- Powerful Comfort Great Control ■ Easy operation ■ Single handed forward/reverse operation ■ 3 positions in forward and 1 in reverse ■ 185 ft./lb. (250 Nm) of maximum torque in reverse





152-07727

153-07737

ASCOT NO. 152-07727

MFG. NO. CP7727

DESCRIPTION 3/8" Super Duty Angle Impact Wrench

1/2" SUPER DUTY **ANGLE IMPACT WRENCH**

- High durability Compact Powerful
- Comfort Great control Easy operation • Single handed forward/ reverse operation • 3 positions in forward and 1 in reverse
- 220 ft./lb. (300 Nm) of maximum torque in reverse

ASCOT NO. 153-07737

MFG. NO. CP7737

DESCRIPTION

1/2" Super Duty Angle Impact Wrench

3/8" HEAVY DUTY AIR **IMPACT WRENCH**

■ The most powerful 3/8" of its class for general maintenance ■ Maximize operator comfort with an extremely light and well balanced design • Most convenient and unique reverse technology in the market • ULTIMATE TORQUE: 415 ft./lb.

ASCOT NO. MFG. NO. 152-07729 CP7729 3/8" Heavy Duty Air Impact Wrench



1/2" SUPER DUTY AIR IMPACT WRENCH

ACCOT NO

■ Tackle the tough jobs with the power and speed of this true workhorse ■ Patented clutch provides smooth operation and extreme durability • One hand push button forward reverse power regulator • 4 positive power settings in forward and ultimate power in reverse ■ Compact design with comfortable contoured handle • ULTIMATE TORQUE: 610 ft./lb.

ASCUI NO.	Mrd. No.	DESCRIPTION
153-07492	CP749	1/2" Impact Wrench
153-17492	CP749-2	2" Extended Anvil

1/2" HEAVY DUTY AIR IMPACT WRENCH

DESCRIPTION

■ One hand push button forward/ reverse power regulator ■ 4 positive power setting ■ Ultimate power in reverse Differential regulator allows the operator to match the required power to the job

■ Patented oil bath Dyna-Pact clutch delivers smooth operation and extended durability - Handle exhaust with 360° air inlet swivel to prevent kinks

■ Power and economy for general repair, transmission work, exhaust systems and body shops • ULTIMATE

TORQUE: 425 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
153-00734	CP734H	1/2" Impact Wrench
153-01734	CP734HK	KIT INCLUDES: CP734H, (1) Set of 5 SAE Sockets: 1/2", 5/8", 3/4", 7/8", 15/16"



153-17492





1/2" Impact Wrenches



ASCOT NO. MFG. NO. DESCRIPTION 153-00736 CP7736 1/2" Super Duty Air Impact Wrench-Tire Tool 153-07336 CP7736-2 2" Extended Anvil

1/2" DRIVE STUBBY IMPACT WRENCH

BEST POWER TO WEIGHT **RATIO:** 450 ft./lb. (610 Nm) Ultra compact and easy

APPLICATIONS: Light vehicle tire

changing operations, light vehicle

mechanical repair, MRO applications

to use • Durable with a steel front cover and aluminum body ■ One hand operation forward - reverse by either left or right-handed users ■ 3 setting positions • Jumbo hammer





153-07732

The 1/2" Drive Stubby Impact Wrench in use.

ASCOT NO. MFG. NO. DESCRIPTION 153-07732 CP7732

1/2" Drive Stubby Impact Wrench

1/2" SUPER DUTY AIR IMPACT WRENCH-TIRE TOOL

■ 960 ft./lb. of torque (1,300 Nm)

■ Hard anodized end plates ■ Hard chromium aluminum cylinder

■ Twin hammer mechanism

■ Lightweight due to the Composite motor housing

COMPACT:

Only 6.6" long • Curved handle with rubber material resistant to most chemicals used in workshops ■ Full teasing trigger ■ 360° swivel air inlet

■ Friction ring socket retainer





The 1/2" Super **Duty Air Impact** Wrench-Tire

ASCOT NO.	MFG. NO.	DESCRIPTION
153-07748	CP7748	1/2" Super Duty Air Impact Wrench-Tire Tool
153-77482	CP7748-2	2" Extended Anvil

1/2" HEAVY DUTY AIR IMPACT WRENCH

■ Side-To-Side (S2S) forward/ reverse functionality

■ Perfectly balanced to reduce strain on wrist and

forearm ■ Twin hammer mechanism ■ ULTIMATE TORQUE: 955 ft./lb



FEATURES S2S (SIDE-TO-SIDE)



ASCOT NO.	MFG. NO.	DESCRIPTION
153-07749	CP7749	1/2" Impact Wrench
153-77492	CP7749-2	2" Extended Anvil



3/4" & 1" Impact Wrenches



Impact Wrenches (CP) (cont.)

3/4" HEAVY DUTY AIR **IMPACT WRENCH**

on the market • One hand push button forward/ reverse power regulator ■ Handle exhaust with 360° air inlet swivel • APPLICATIONS: spring work, truck and bus maintenance. farm machines & construction equipment



CETIMATE TORGOL. 1,000 H./ID.				
ASCOT NO.	MFG. NO.	DESCRIPTION		
154-00772	CP772H	3/4" Impact Wrench		
154-01772	CP772H-6	6" Extended Anvil		

1" HEAVY DUTY AIR IMPACT WRENCH

Chicago Pneumatic's strongest and most powerful 1" Impact Wrench

Operator productivity

Convenient reverse

154-01772

154-77696

154-37763

valve Ideal for high volume tire work on trucks, buses, and heavy equipment • 1" impact wrench with 7" extended anvil ■ Rocking dog clutch

4-position power settings throttle for ease of use

ASCOT NO.	MFG. NO.	DESCRIPTION
155-50000	CP5000	7" Extended Anvil

3/4" HEAVY DUTY AIR IMPACT WRENCH

■ Reduced Length at only 7.9" ■ All controls within reach • Variable speed trigger

One-hand power adjustment

One-hand

reverse system (■ 1440 ft./lb.

(1950 Nm) of maximum torque ■ Composite motor housing • Twin hammer mechanism

■ 360° swivel air inlet ■ Socket retainer ring combined with hole retainer

ASCOT NO.	MFG. NO.	DESCRIPTION
154-07769	CP7769	3/4" Impact Wrench
154-77696	CP7769-6	6" Extended Anvil

1" SUPER DUTY AIR IMPACT WRENCH

■ 14.5 lb. (6.6 kg) ■ Twin hammer mechanism • Steel motor • Intuitive forward/reverse lever & power regulator on both


sides ■ 4-position power settings on both sides ■ Side handle with soft touch grip ■ Down exhaust ■ Aluminum housing • Composite cover on the clutch housing ■ Socket retainer ring ■ 1300 ft./ lb. (1760 Nm) maximum torque in reverse

ASCOT NO.	MFG. NO.	DESCRIPTION
155-07773	CP7773D	1" Short Shank
155-77736	CP7773D-6	6" Extended Anvil

3/4" SUPER DUTY AIR IMPACT WRENCH - "D" HANDLE

■ LIGHTWEIGHT: 3/4" at only 14.3 lb. ■ 1300 ft./lb. (1760 Nm

maximum torque in reverse)



■ Down exhaust ■ Aluminum housing ■ Composite cover on the clutch housing - Socket retainer ring

ASCOT NO.	MFG. NO.	DESCRIPTION
154-27763	CP7763D	1" Short Shank
154-37763	CP7763D-6	6" Extended Anvil

1" HEAVY DUTY AIR **IMPACT WRENCH**

■ High performance clutch provides longer life under tough conditions

■ High-

efficiency 6 vane motor for maximum performance ■ Bottom exhaust directs exhaust away from the operator • Threeposition power regulator with directional control • ULTIMATE TORQUE: 1,620 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
155-07778	CP7778	1" Short Shank
155-77786	CP7778-6	6" Extended Anvil
155-27786	CP7778SP-6	#5 Spline with 6" Extended Anvil



155-77786

155-77736





1" Impact Wrenches

1" Heavy Duty Air **Impact Wrench**

- 2140 ft./lb. (2900 Nm) of maximum torque in reverse
- Pinless closed reinforced rocking dog impact mechanism
- Socket retainer ring combined with hole retainer
- Ergonomic side handle
- Full teasing trigger
- Regulator with integrated forward/ reverse with 3-position power settings in both directions



ASCOT NO.	MFG. NO.	DESCRIPTION	
155-07782	CP7782	1" Short Anvil	
155-77826	CP7782-6	6" Extended Anvil	
155-17782	CP7782-SP6	#5 Spline with 6" Extended Anvil	

1" HEAVY DUTY AIR IMPACT WRENCH

High Operator Comfort-Ergonomic D-Handle with full teasing trigger • HIGH DURABILITY: Pinless closed reinforced rocking dog mechanism in oil bath ■ **SHOCK ABSORBING:** Rubber bumper protecting

both applications and tool (included) • POWERFUL AND LIGHT: 1770 ft./lb. (2400 Nm) in reverse



155-77836

ASCOT NO.	MFG. NO.	DESCRIPTION	
155-07783	CP7783	1" Short Shank	
155-77836	CP7783-6	6" Extended Anvil	

1" HEAVY DUTY AIR IMPACT WRENCH

■ LIGHTWEIGHT:

Only 6.9 lb. (3.15 kg) thanks to a composite motor housing for an improved operator comfort

 Socket retainer ring combined with hole retainer ■ Twin hammer mechanism ■ ALL

CONTROLS WITHIN REACH: Variable speed trigger, One-hand power adjustment, One-hand reverse system

■ 360° swivel air inlet ■ 1440 ft./lb. (1950 Nm in reverse)

155-07779

155-07976

ASCOT NO.	MFG. NO.	DESCRIPTION	
155-07779	CP7779	1" Impact Wrench	
155-17779	CP7779-6	6" Extended Anvil	

1" SUPER DUTY AIR **IMPACT WRENCH**

Rocking dog clutch for smooth operation

and extreme durability • Teasing throttle for easy bolt starting • Convenient reverse valve

for easy directional changes ■ Choice of professional mechanics for high volume tire work on trucks, buses and heavy equipment • ULTIMATE TORQUE: 1,400 ft./lb.





Sanders, Blue Tork



Sanders & Blue Tork

HEAVY DUTY HIGH-SPEED SANDER

- Built-in regulator and variable speed throttle for precise speed control
- Rugged, energy efficient 1/2 HP motor
- APPLICATIONS: Ideal for small jobs or hard to reach spots including paint removal, shaping filler patches,

smoothing and rust removal • FREE SPEED: 14,000 RPM

ASCOT NO. MFG. NO. 158-00778 CP9778 Heavy Duty High-Speed Sander



MINI DISC SANDER KIT

KIT INCLUDES: CP7202 Mini Disc Sander plus (1) 3" backing pad, (10) 3" 80, 100 & 120 grit sanding discs, (1) 3" fine, medium and coarse surface prep disc & a spindle wrench packed in a heavy duty carrying

158-07202

case • FREE SPEED: 15,000 RPM

ASCOT NO. MFG. NO. DESCRIPTION 158-07202 CP7202D Mini Disc Sander Kit



1" Non-Impact Wrench (Blue Tork)

- Two pneumatic motors for rundown and final tightening
- Preset and adjustable shut off for torque control
- QUALITY: Precise, accurate tightening to the manufacturer's recommended torque and angle specifications
- ENVIRONMENT IMPROVEMENTS: by increasing durability of the tools, we reduce waste

- **ERGONOMICS:** very low noise level, virtually no vibration
- **EFFICIENCY:** Precise and accurate tightening, less fatigued operators
- MAXIMUM TORQUE: 660 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
168-07600	CP7600xB	Non-Reversible Single Torque Preset
168-07602	CP7600xB-R	Reversible Single Torque Preset
168-07603	CP7600xB-R4P	Reversible 4 Torque Preset Selector







Air Ratchets

QUICK REFERENCE CHART

CP No.	Ascot No.	Sq. Drive (mm)	Std Bolt Size (mm)	Net Weight (kg.)	Average Air Cons. (CFM)	Air Inlet (NPTF) In.	Min. Hose Size (inch)	Working Torque Range (ft./lb.)	Max. Torque (ft./lb.)
CP826	151-00826	1/4" (6)	1/4" (6)	1.13 (0.51)	3.5	1/4"	3/8" (10)	5-15 (7-20)	15 (20)
CP828	152-00828	3/8" (10)	3/8" (10)	2-5/8 (1.2)	4	1/4"	3/8" (10)	10-50 (14-68)	50 (68) 150 RPM
CP7829	152-07829	3/8" (10)	3/8" (10)	1.235 (2.72)	4	1/4"	3/8" (10)	10-55 (15-68)	95 (70)
CP7830Q	152-07830	3/8" (10)	3/8" (10)	2.7 (1.2)	5 (142)	1/4"	3/8" (10)	10-90 (14-136)	90 (122)

1/4" SUPER DUTY AIR RATCHET

- Exceptional durability with an advanced head design that virtually eliminates slippage
- Urethane grip for comfort and control ■ Faster rundown with 250 RPM • APPLICATIONS: Under-dashboard work, small engine repair and body shops

■ ULTIMATE TORQUE: 15 ft./lb.

ASCOT NO.

MFG. NO.

151-00826 CP826 1/4" Super Duty Air Ratchet

DESCRIPTION

RUBBER

BUMPER

152-07829



3/8" HEAVY DUTY AIR RATCHET

- Advanced motor, full caged gear, and head design
- Only 10.7in / 272mm long ■ Better access to restricted areas ■ 2.7 lb. / 1.2 kg ■ Adjustable side exhaust avoids blowing dirt and dust
- Ergonomic composite grip insulates operator's hand from cold • Designed for a variety of applications from heavy ones such as transmission and suspension work to light ones such as engine repair, dashboard work and general maintenance
- ULTIMATE TORQUE: 70 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
152-07829	CP7829	3/8" Heavy Duty Air Ratchet
153-07829	CP7829H	1/2" Heavy Duty Air Ratchet
153-07829	CP/829H	1/2" Heavy Duty Air Ratchet

3/8" EXTREME DUTY AIR RATCHET

■ Adjustable side exhaust ■ LOW NOISE **LEVEL:** Only 79 dBA ■ One of the highest torques available on the market • CP's Patented TriSpring anti-slip head design

ASCOT NO.	MFG. NO.	DESCRIPTION	152-07830
152-07830	CP7830Q	3/8" Super Duty Ratchet	
153-07830	CP7830HQ	1/2" Super Duty Ra	ntchet

3/8" QUIET AIR RATCHET

■ APPLICATIONS: exhaust systems, small engines, water and fuel pumps and radiator and air conditioner removal and replacement • New advanced, patented head design ■ Patented ergonomic square-handle design for a comfortable grip ■ Efficient 1/2 HP motor and triple idler planetary gear system • ULTIMATE TORQUE: 50 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION 152-00828
152-00828	CP828	3/8" Quiet Air Ratchet
153-08281	CP828H	1/2" Quiet Air Ratchet



The 3/8" Air Ratchet in use.



Needle Scaler, Cut-Off Tools, Tire Buffers

Needle Scaler, Cutter, Tire Buffers (CP)

NEEDLE SCALER

- Ideal for surface preparation work
- Adjustable sleeve allows needle clearance based on the application
- 19 1/8" steel needles with high resistance to wear ■ Easily converts to a weld flux chipping hammer
- BLOWS PER MINUTE: 4,800

ASCOT NO.	MFG. NO.	DESCRIPTION
157-07120	CP7120	Needle Scaler



157-00874

HIGH SPEED CUTTER

 Adjustable speed regulator for precise control . Lock off throttle to prevent accidental start up ■ Rear exhaust directs air away from work area

■ MAX RPM: 22,000



LOW SPEED TIRE BUFFER KIT

 Quick change slip chuck for fast and easy change of buffing wheel

Adjustable speed regulator for precise control ■ Lock off throttle to prevent accidental start ups ■ Rear exhaust directs air away from work area

■ FREE SPEED: 2,800 RPM



ASCOT NO.	MFG. NO.	DESCRIPTION
158-00873	CP873K	Includes Over Hose
158-01873	CP873	Low Speed Tire Buffer Only

HIGH SPEED TIRE BUFFER KIT

- Jacobs chuck for holding buffing accessories ■ Lock-off throttle
- APPLICATIONS: tire patchwork roughing areas for recapping and cleaning tire moldings

■ **FREE SPEED:** 22,000 RPM



ASCOT NO.	MFG. NO.	DESCRIPTION
158-00871	CP871K	Includes Over Hose
158-01871	CP871	High Speed Tire Buffer Only

Grinders & Surface Conditioning Discs





BUFFERS, GRINDERS, DRILLS & ACCESSORIES // AIR TOOLS 65

Surface Conditioning Discs, Bristle Discs, Grinders, Grinder Kits

Grinders & Surface Conditioning Discs (cont.)

2" SURFACE **CONDITIONING DISCS**



- Best used on aluminum parts
- USA MADE QUANTITY: 25 per box
- MAXIMUM OPERATING SPEED: 25,000





417-13004

417-13003 417-13005

ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./BOX
417-13003	620TE-1	2" Surface Conditioning Discs: Brown (Coarse)	25
417-13004	622TE-1	2" Surface Conditioning Discs: Maroon (Medium)	25
417-13005	620TE-1-50	2" Surface Conditioning Discs: Brown (Coarse)	50

MINI ANGLE DIE GRINDER

 Compact, lightweight design for easy maneuverability • 90° angle head allows flexibility in confined areas

■ Complete with 1/4" and 6mm collet ■ APPLICATIONS: high speed

blending, smoothing, porting, and deburring in confined areas ■ MAX RPM: 22,500

ASCOT NO. 157-00875

MFG. NO. CP875

DESCRIPTION

Mini Angle Die Grinder

MINI DIE GRINDER

Compact, lightweight design for easy maneuverability - Adjustable speed regulator for precise control ■ Complete with 1/4" and 6mm

collet • APPLICATIONS: high speed blending, smoothing, porting, and deburring in confined areas • MAX RPM: 30,000

ASCOT NO. MFG. NO. 157-00876 CP876

DESCRIPTION Mini Die Grinder



157-00875

STRIP-BRITE PADS

- Used for paint or coating removal
- Features the guick and easy twist-to-lock attachment system

Open-web construction impregnated with silicon carbide to provide aggressive and longlasting performance - Threedimensional web has a soft edge, allowing it to remove paint and other coatings in those unreachable creases and dents while

removing very little metal Ideal for stripping paint without damaging metal, especially on aluminum

■ QUANTITY: 10 per Box



LOCK
SYSTEM

ASCOT NO.	MFG. NO.	DESCRIPTION
417-16210	16210	Purple 2" Strip-Brite Pad
417-16211	16211	Purple 3" Strip-Brite Pad

2" ANGLE **GRINDER KIT**

■ KIT INCLUDES: Pin Wrench, Spanner, (3) each 2" 60, 80 & 120 Grit Grinding Wheels, (5) each 2" Cutting Wheels and Protective Glasses packed in a heavy duty carrying case • FREE **SPEED: 22,000 RPM**

ASCOT NO. 157-07500

MFG. NO. CP7500DK

DESCRIPTION 2" Angle Grinder Kit



MINI ANGLE DIE **GRINDER KIT**

■ KIT INCLUDES: (1) 2" backing pad, (2) 2" coarse surface prep pads, (2) 2" medium surface prep pads, (2) 2" fine surface prep pads, (2) 2' 50 grit sanding discs, (2) 2" 36 grit sanding discs, (2) 2" 24 grit sanding discs paced in a heavy duty carrying case • MAX RPM: 22,500

ASCOT NO. 157-01875

MFG. NO. CP875K

Mini Angle Die Grinder Kit









Drills (CP)



rubber handle grip ■ Wings on right & left sides to guide the forefinger ■ Large teasing trigger and progressive valve allowing more control to start holes ■ Low speed gear box ■ Flat back part for better pushing action while drilling and tapping ■ Reverse lever on the top for easier access • Handle exhaust allowing the air to flow away from the operator ■ Supplied with high quality

industrial Jacobs® chucks for longer use • keyed Metal • APPLICATIONS: Excellent for drilling, honing, reaming and hole sawing • FREE SPEED: 3,300 RPM

ASCOT NO. 157-07302

MFG. NO. CP7300RC DESCRIPTION

1/4" Reversible Mini Air Drill

1/4" MINI AIR DRILL

 Composite housing with thermoplastic rubber handle grip ■ Wings on right & left sides to guide the forefinger • Large teasing trigger and progressive valve allowing more control to start holes ■ Low speed gear box ■ Flat back part for better pushing action while drilling and tapping • Handle exhaust allowing

the air to flow away from the operator Supplied with high quality industrial Jacobs® chucks for longer use ■ keyed Metal ■ APPLICATIONS: Excellent

for drilling, honing, reaming and hole sawing • FREE SPEED: 3,300 RPM

ASCOT NO. MFG. NO. DESCRIPTION CP7300C 157-17302 1/4" Mini Air Drill



157-07302

Teasing throttle for precise

control - APPLICATIONS: Screwdriving, honing and heavy drilling • FREE **SPEED: 2,600 RPM**

ASCOT NO. MFG. NO. DESCRIPTION 157-78926 CP789-R26

3/8" REVERSIBLE DRILL **TEASING THROTTLE** 3/8" Reversible Drill 157-78926

3/8" REVERSIBLE ANGLE DRILL

■ Composite housing with thermoplastic rubber handle grip ■ Lock-off throttle for more controlled applications - Built-in Forward-Reverse ring

■ Compact low profile head to get into confined spaces • Handle exhaust allowing the air to flow away from the operator■ Supplied with high quality industrial Jacobs® chucks for longer use ■ APPLICATIONS: Excellent for drilling and screw driving in confined areas • FREE SPEED: 2,000 RPM

ASCOT NO. MFG. NO. DESCRIPTION 157-01879 CP879C 3/8" Reversible Drill





1/2" REVERSIBLE DRILL

■ Teasing throttle for precise control - APPLICATIONS: heavy drilling, reaming, hole sawing and jobs requiring a lot of torque

• FREE SPEED: 500 RPM

ASCOT NO. MFG. NO. DESCRIPTION

157-00789 CP789-HR 1/2" Reversible Drill 157-00789

SUPPLY CORPORATION

ASCOT SUPPLY CORPORATION AWARNING: For more information go to www.P65Warnings.ca.gov. **BUYER'S GUIDE**



Air Tool Accessories

Air Tool Accessories (CP)

PROTECTO-LUBE AIR TOOL OIL

ASCOT NO.	MFG. NO.	DESCRIPTION		
181-00046	CA-000046	20 Oz.		
181-14966	CA-149661	4 Oz.		

PVC CUSHION-COAT PROTECTIVE COVERS

TOOL NO.	ASCOT NO.	MFG. NO.
СР734Н	177-12940	CA-129405
CP749, CP749-2	177-15553	CA-155537
CP772H	177-12474	CA-124745
CP7733 -2	177-77332	8940158949
CP7778, CP7778-6	177-17778	8940163099

REPAIR KITS

TOOL NO.	ASCOT NO.	MFG. NO.
CP724H	176-55310	CA-155310
CP749	176-58636	8940158636
CP7749/7749-2	176-88482	8940167482
CP7733	176-88861	8940158861

TUNE-UP KITS

TOOL NO.	ASCOT NO.	MFG. NO.
CP721	176-18880	CA-118880
CP724H	176-55218	CA-155218
CP749	176-14861	8940158635
CP749-2	176-14866	8940158635
CP7733/7733-2	176-89860	8940158860
CP796	176-26992	CA-126992
CP7778/7778-6	176-89816	8940162816
CP7775/7775-6/7775SP-6	176-62206	8940162206
CP7782-6	176-89447	8940169847

IMPACT WRENCH ACCESSORIES

ASCOT NO.	MFG. NO.	DESCRIPTION
175-82651	H-082651	1" Impact Wrench Retainer Clip O-Ring
175-83071	P-08371	O-Ring for 1/2" Impact Wrench Retainer Clips
175-88097	CA-088097	1/2" CP Impact Wrench Retainer Clips
175-94791	CA-094791	1" Impact Wrench Retainer Clip

HAMMER ACCESSORIES




INDEX NO. ASCOT NO.		MFG. NO.	DESCRIPTION
1	171-47050	A-047050	Rivet Cutter
2	171-47051	A-047051	Wide Cutting Chisel
3	171-47052	A-047052	Bushing Splitter
4	171-47057	A-047057	U-Joint & Tie Rod Tool
5	171-47059	A-047059	1" Separator Fork
	171-47061	A-047061	1-1/4" Separator Fork
6	171-47071	A-047071	Twin Blade Cutter
7	171-47073	A-047073	Cold Chisel

INDEX NO.	ASCOT NO.	MFG. NO.	DESCRIPTION
8	171-47074	A-047074	Straight Punch
9	171-47078	A-047078	Tapered Punch
10	171-47091	A-047091	1-1/4" Smoothing Hammer
11	171-47095	A-047095	Quick-Change Retainer
12	171-47096	A-047096	Bee-Hive Retainer
	171-47270	CA-047270	2' Leader Hose
	171-47300	CA-047300	Quick Change Coupler
	171-47032	CA-047302	Nipple



■ Impact Wrenches, Impact Wrench Accessories



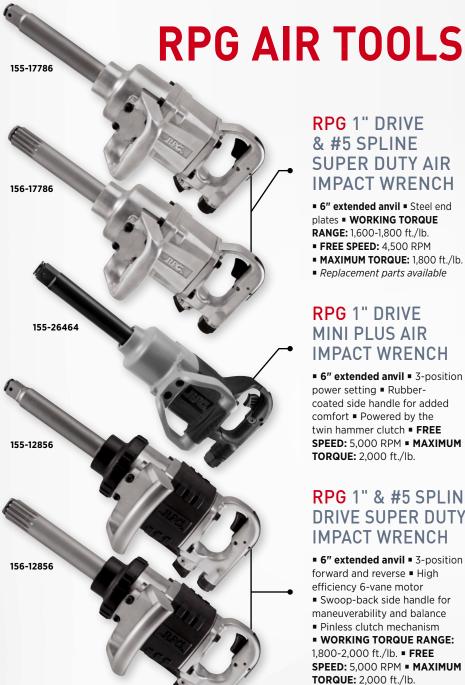

RPG 1" DRIVE & #5 SPLINE SUPER DUTY AIR **IMPACT WRENCH**

- 6" extended anvil Steel end plates • WORKING TORQUE **RANGE:** 1,600-1,800 ft./lb.
- FREE SPEED: 4,500 RPM
- MAXIMUM TORQUE: 1,800 ft./lb.
- Replacement parts available

RPG 1" DRIVE MINI PLUS AIR **IMPACT WRENCH**

■ 6" extended anvil ■ 3-position power setting • Rubbercoated side handle for added comfort ■ Powered by the twin hammer clutch • FREE SPEED: 5,000 RPM • MAXIMUM **TORQUE:** 2,000 ft./lb.

RPG 1" & #5 SPLINE **DRIVE SUPER DUTY IMPACT WRENCH**

- 6" extended anvil 3-position forward and reverse ■ High efficiency 6-vane motor
- Swoop-back side handle for maneuverability and balance
- Pinless clutch mechanism
- WORKING TORQUE RANGE: 1,800-2,000 ft./lb. • FREE SPEED: 5,000 RPM • MAXIMUM

TORQUE: 2,000 ft./lb.

REPLACEMENT PARTS



ASCOT NO. MFG. NO. DESCRIPTION

175-10043

	ACEMENT PA DRIVE IMP	ARTS FOR ACT WRENCH
175-10026	#26	Set of 6 Rotor Blades for A778-6 1" Drive Impact Wrench
175-10037	#37	Hammer for A778-6 1" Drive Impact Wrench
175-10040	#40	Hammer Cage for A778-6 1" Drive Impact Wrench
175-10043	#43	Replacement Side Handle Kit for A778-6 1" Drive Impact Wrench
176-18406	A778-6TK	Tune-Up Kit for A778-6 1" Drive Impact Wrench

IMPACT WRENCH SPECIFICATIONS

ASCOT NO.	MFG. NO.	SQUARE DRIVE	FREE SPEED (RPM)	MAX TORQUE (FT./LB.)	AIR PRESSURE (PSI)	AIR CON. AVG (CFM)	AIR INLET (NPT)	HOSE SIZE	LENGTH	WEIGHT (LB.)
155-12856	A2856	1"	5,000	2,000	_	12	1/2"	3/4"	20.5"	27.6
155-17786	A778-6	1"	4,500	1,800	90	8.4	1/2"	3/4"	20.3"	26.59
155-26464	A26464	1"	5,000	1,800	90	9	1/2"	3/4"	19.2"	17.86
156-12856	A2856SP	#5 Spline	5,000	2,000	_	12	1/2"	3/4"	20.5"	27.6
156-17786	A778SP-6	#5 Spline	4,500	1,800	90	8.4	1/2"	3/4"	20.3"	26.59

153-33120

153-33121

RUBBER

GRIP



■ Impact Wrenches

RE.



HANDLE **EXHAUS**1





RPG 1" DRIVE SUPER DUTY AIR **IMPACT WRENCH** W/ RUBBER GRIP

■ 2" extended anvil ■ FREE SPEED: 8,000 RPM • MAXIMUM TORQUE: 600 ft./lb. ■ Powered by the durable and high performing twin hammer mechanism ■ Proven design and the most popular configuration in the tire service industry

■ Handle exhaust ■ Rubber grip

See A2312 Impact Wrench Replacement Parts & Accessories on the next page

RPG 1/2" DRIVE SUPER DUTY AIR **IMPACT WRENCH**


■ 2" extended anvil ■ FREE SPEED: 8000 RPM • MAXIMUM TORQUE: 600 ft./lb. ■ Proven design and the most popular configuration in the tire service industry ■ Powered by the durable and high performing twin hammer mechanism • Handle exhaust

RPG 1/2" DRIVE **SUPER DUTY** COMPOSITE IMPACT WRENCH

■ 2" extended anvil ■ FREE SPEED: 8,000 RPM • MAXIMUM TORQUE: 700 ft./lb. ■ Composite body offering lighter weight and improved balance - Swivel air inlet for ease of use ■ Powered by the durable and high performing twin hammer mechanism

■ Handle exhaust

IMPACT WRENCH SPECIFICATIONS





■ Impact Wrenches, Impact Wrench Accessories



RPG AIR TOOLS (cont.)

REPLACEMENT PARTS FOR A2312 1/2" DRIVE IMPACT WRENCH





175-13457

ASCOT NO. MFG. NO. DESCRIPTION

REPLACEMENT PARTS FOR

ALJIL	I/E DIGITE	IIII ACT WILLIAM		
175-10029	A2312-RB	Set of 6 Rotor Blades for A2312 Impact Wrench		
175-13457	A2312-HTK	Hammer Tune-Up Kit for A2312 Impact Wrench		

Replacement Parts are for the A2312 Impact Wrench on the previous page

IMPACT WRENCH ACCESSORIES



175-23104

ASCOT NO.	MFG. NO.	DESCRIPTION
175-23104	JB-04Blue	Blue Protective Boot for RPG A2312 Impact Wrenches
175-82651	H-082651	1" Impact Wrench Retainer Clip O-Ring
175-83071	P-08371	O-Ring for 1/2" Impact Wrench Retainer Clips



RPG 3/4" DRIVE IMPACT WRENCH

- Short anvil
- 6-position power setting
- FREE SPEED: 5,500 RPM
- MAXIMUM TORQUE: 1,100 ft./lb.
- The most powerful 3/4" drive classic wrench
- Suitable for tire or engine work on truck, bus or farm machinery
- Handle exhaust

IMPACT WRENCH SPECIFICATIONS

ASCOT NO.		DRIVE	SPEED (RPM)	TORQUE (FT./LB.)		AVG (CFM)	INLET (NPT)	SIZE	LENGTH	(LB.)
154-10261	A261	3/4"	5,500	1,100	_	9.5	3/8"	1/2"	8.2"	12.9





Tire Buffers, Accessories

RPG LOW SPEED TIRE • BUFFER WITH QUICK CHANGE SLIP CHUCK

 Brass bushings provide performance and durability in tough working conditions • Includes whip hose and exhaust hose • Quick change slip chuck for fast and easy change of buffing wheel • Built-in regulator • Lock off throttle to prevent accidental start ups ■ Rear exhaust directs air away from the work area ■ Ideal for patchwork, roughing areas for recapping and cleaning tire moldings ■ Overhose Kit also Available Separately (175-00873)





RPG HIGH SPEED TIRE BUFFER WITH **OVERHOSE KIT**

■ Jacobs chuck for holding buffing accessories - Lock-off throttle • FREE SPEED: 22,000 RPM • APPLICATIONS: Tire patchwork, roughing areas for recapping and cleaning tire moldings ■ Includes overhose kit



RPG HIGH SPEED **BUFFER KIT** WITH QUICK **CHANGE CHUCK**

 Quick change chuck for holding buffing accessories ■ Lock-off throttle • FREE SPEED: 22,000 RPM • APPLICATIONS: Tire patchwork, roughing areas for recapping and cleaning tire moldings ■ Includes overhose kit







175-00873 175-18713

ASCUI NO.	MFG. NO.	DESCRIPTION
REPLACEN	MENT PARTS	FOR AIR BUFFERS
175-00873	A-873K-OH	Overhose Kit for Tire Buffers
175-18713	A8713-TA	Trigger Assembly for Tire Buffers
175-28713	SQC01	Replacement 7/16" Quick Change Slip Chuck
ACCES	AIR BUFFERS	

ACCE	SSORIES FOR	AIR BUFFERS			
173-00018	QC18	Quick Chuck Adapter W/ Collar			
173-00019	QC19 Quick Ch W/ Spac 3/8" Thr				
173-00020	QC20	Quick Chuck Adapter For 1/8" Shank			
173-00022	QC22	Quick Chuck Adapter For 1/4" Shank			
173-00023	QC23	Quick Chuck Adapter For 5/16" Shank			

TIRE BUFFER SPECIFICATIONS

ASCOT NO.	MFG. NO.	DESCRIPTION	FREE SPEED (RPM)	LENGTH
158-10873	A873K	Low Speed Tire Buffer with Quick Change Chuck	2,800	1.75"
158-10871	A871K	High Speed Tire Buffer with Overhose kit	22,000	2.5"
158-11871	A871K-QC	High Speed Buffer Kit with Quick Change Chuck	22,000	1.75"



72 AIR TOOLS // RPG AIR TOOLS

Air Drills, Air Screwdriver, Accessories



RPG AIR TOOLS (cont.)

RPG 1/2" REVERSIBLE AIR DRILL



PARTS & ACCESSORIES ASCOT NO. MFG. NO. DESCRIPTION

REPLACEMENT PARTS FOR 1/2" REVERSIBLE AIR DRILL							
175-01035	253340	Side Handle Kit for A1035 Air Drill					
175-11035	H025	Air Hose Exhaust Kit for A1035 Air Drill					



RPG 3/8" HEAVY DUTY AIR DRILL







RPG 1/4" AIR SCREWDRIVER



AIR TOOL SPECIFICATIONS

ASCOT NO.	MFG. NO.	FREE SPEED (RPM)	AIR PRESSURE (PSI)	AIR CON. AVG (CFM)	AIR INLET (NPT)	HOSE SIZE LENGTH				WEIGHT (LB.)
157-01035	A1035	500	90	4	1/4"	3/8"	7.5"	2.86		
157-01038	A1038	2,200	90	6	1/4"	3/8"	8"	2.42		
157-88725	A88-7251	1,800	90	4	1/4"	3/8"	7.7"	4.6		





Cut-Off Tool, Die Grinder, Adhesive Removal Tool

RPG WHEEL WEIGHT ADHESIVE REMOVAL TOOL

- High torque motor to cut through stubborn wheel weight adhesive, body pinstripes, etc.
- High RPM to prevent pad from bogging down
- Pad made of a tough and long-lasting material
- Rubber-insulated motor housing for hand comfort
- Lock-off trigger for added safety *Includes* eraser pad • SPINDLE THREAD: 5/16"-24



PARTS & ACCESSORIES

ASCOT NO. MFG. NO. DESCRIPTION

REPLACEMENT PARTS FOR WHEEL WEIGHT ADHESIVE TOOL

157-03253

A143252-6

Replacement Eraser Pads for Wheel Weight Adhesive Removal Tool (6 per Package)



RPG 3"CUT-OFF TOOL

■ Adjustable speed regulator for precise control ■ Lockoff throttle to prevent accidental start-up

Rear exhaust directs air away from work area • Durable gears for top performance and long life • FREE SPEED: 22,000 RPM



RPG 1/4" MINI ANGLE DIE GRINDER

- Compact, lightweight design for easy use
- APPLICATIONS: High speed blending, smoothing, porting and deburring in confined areas ■ Right angle for easy maneuvering • FREE SPEED: 22,000 RPM



AIR TOOL SPECIFICATIONS

ASCOT NO.	MFG. NO.	FREE SPEED (RPM)	AIR PRESSURE (PSI)	AIR CON. AVG (CFM)	AIR INLET (NPT)	HOSE SIZE	LENGTH	WEIGHT (LB.)
157-03252	A143252	3,700	90	4	1/4"	3/8"	7.9"	1.8
157-10874	A874	22,000	90	5	1/4"	3/8"	7.25"	1.75
157-10875	A875	22,000	90	5	1/4"	3/8"	5"	1



Cordless 1/2" Drive & 1" Drive Impact Wrenches



Milwaukee Power Tools

CORDLESS 1/2" DRIVE IMPACT WRENCH

4 CUSTOMIZABLE MODES: Provides multiple fastening torque outputs designed for sedans, light trucks and box trucks ■ POWERSTATE™ BRUSHLESS MOTOR: Delivers up to 750 ft./lb. of fastening torque and 1,100 ft./lb. of nut-busting torque ■ LONG MOTOR LIFE: POWERSTATE™ Brushless Motor delivers maximum power and long motor life • FASTER TIRE SERVICE: Enables users to perform faster tire service by removing the hassle of pneumatic hoses, compressors, and torque sticks - PART OF THE M18™ SYSTEM: Featuring over 175+ Tools

CORDLESS 1" DRIVE IMPACT WRENCH


■ POWERSTATE™ BRUSHLESS MOTOR: Delivers up to 1,800 ft./lb. nut-busting torque, making it the world's most powerful cordless impact wrench ■ Up to 7 lb. lighter weight allowing for less user fatigue ■ ONE-KEY™ COMPATIBLE: Ability to customize, track and manage tools for increased productivity and investment protection ■ 4-MODE DRIVE **CONTROL™:** Provides greater control over output speed and power **LOWER OWNERSHIP COST:** Eliminates compressors and generators, providing greater portability and lower cost of ownership ■ Includes the ability to set a repeatable torque output for maximum control



ASC	OT NO.	MFG. NO.	DESCRIPTION			
153-	76920	2769-20	Cordless 1/2" Drive Impact Wrench – 2" Extended Anvil (Bare Tool)	ASCOT NO.	MFG. NO.	DESCRIPTION
153-	153-76922 2769-22		Cordless 1/2" Drive Impact Wrench	Vrench 155-86720		Cordless 1" Drive Impact – Standard Anvil (Bare Tool)
	70322	2,03 22	- 2" Extended Anvil (Kit)	155-86722	2867-22	Cordless 1" Drive Impact – Standard Anvil (Kit)







2-PIECE CORDLESS TOOL KIT: 1/2" & 3/8" DRIVE STANDARD **ANVIL IMPACT WRENCHES**

- MOST POWERFUL 1/2" IMPACT WRENCH: 1,000 ft./lb. fastening & 1,400 ft./lb. nut busting torque
- MOST POWERFUL 3/8" IMPACT WRENCH: 600 ft./ lb. nut-busting torque
- Over 60% longer 3/8" anvil life than cordless competitor
- MOST COMPACT HIGH TORQUE IN THE INDUSTRY: Up to 0.7" shorter length than the competition
- Redlink plus intelligence prevents damage to the tool and battery due to overloading or overheating

CORDLESS 1/2" DRIVE STUBBY IMPACT **WRENCH KIT**

- MOST COMPACT: 5.1" in length
- 100 ft./lb. breakaway torque
- 4-mode drive control Auto shutoff mode reduces over fastening and increases productivity • One of 90+ tools on the M12 system



The Cordless 1/2" Drive Stubby Impact Wrench in use.







MOST COMPACT HIGH **TORQUE**



ASCOT NO. MFG. NO. DESCRIPTION

153-55522 2555-22

Cordless 1/2" Drive Stubby Impact Wrench Kit

ilwaukee

M12 FUEL

153-55522

ASCOT NO. MFG. NO. 153-99322 2993-22

DESCRIPTION

2-Piece Cordless Tool Kit: 1/2" & 3/8" Drive Standard Anvil Impact Wrenches



Cordless 1/4" & 3/8" Ratchet Tool Kits



Milwaukee Power Tools (cont.)

CORDLESS 1/4" RATCHET TOOL KIT

■ MOST POWERFUL: Delivers industry leading torque output of up to 40 ft./lb. • MOST COMPACT: Up to 20% smaller head size • MOST DURABLE: Worlds 1st brushless ratchet provides 2x longer motor life ■ Best-in class torque to head size ratio • Premium metal components for longer durability

CORDLESS 3/8" RATCHET TOOL KIT

■ MOST POWERFUL: Delivers industry leading torque output of up to 40 ft./lb. • MOST COMPACT: Up to 20% smaller head size • MOST DURABLE: Worlds 1st brushless ratchet provides 2x longer motor life ■ Best-in class torque to head size ratio • Premium metal components for longer durability



The Cordless 1/4" Ratchet Tool in use.



ASCOT NO. MFG. NO. 172-55621

2556-21

DESCRIPTION

Cordless 1/4" Ratchet Tool Kit

ASCOT NO. MFG. NO. 172-55721

2557-21

Cordless 3/8" Ratchet Tool Kit

DESCRIPTION







M18 Lithium Battery, M18 Lithium Battery Pack, M12 Lithium Battery

M18 LITHIUM HIGH **OUTPUT BATTERY**

- REDLINK™ INTELLIGENCE: Our battery circuitry provides optimized performance and overload protection using total system communication between tool, battery and charger
- BEST-IN-CLASS CONSTRUCTION: Offers long-lasting performance and the best protection against jobsite, weather and environmental conditions • FUEL GAUGE

ONBOARD: Displays remaining run-time • VERSATILITY: Powers all 175+ M18™ cordless solutions

- Compatible with all M18[™] tools
- 2 year battery warranty

M18 LITHIUM 5.0AH **BATTERY PACK**

■ REDLINK™ INTELLIGENCE:

Provides optimized performance and overload protection using total system communication between tool, battery and

charger ■ BEST-IN-CLASS **CONSTRUCTION:** Offers long-lasting performance and durability • FUEL GAUGE

ONBOARD: Displays remaining runtime for less downtime on the iob • ALL-WEATHER

PERFORMANCE: Delivers fade free power in extreme jobsite conditions • VERSATILITY:

Powers more than 175+ Milwaukee® M18™ cordless power tools ■ Ground transport only

> **FUEL GAUGE ONBOARD**

M12 LITHIUM 3.0 **COMPACT BATTERY**

■ REDLINK™ INTELLIGENCE:

Provides optimized performance and overload protection using total system communication between tool, battery and charger • BEST-IN-CLASS **CONSTRUCTION: Offers** long-lasting performance and durability • ALL-WEATHER **PERFORMANCE:** Delivers fade-free power in extreme job site conditions • VERSATILITY: Powers 70+ Milwaukee M12 cordless solutions





FUEL GAUGE ONBOARD

PART OF THE

2-YEAR **BATTERY** WARRANTY

ASCOT NO. MFG. NO.

345-11835

48-11-1835

DESCRIPTION M18 Lithium High Output Battery

345-11835



345-11850

ASCOT NO. MFG. NO.

48-11-1850 M18 Lithium 5.0AH **Battery Pack**

DESCRIPTION

ASCOT NO. MFG. NO. 345-12430

48-11-2430

DESCRIPTION M12 Lithium 3.0 Compact Battery



345-11850

Air Tool Lubricants, Air Tool Conditioner

Air Tool Lubricants & Conditioner

BLASTER AIR TOOL CONDITIONER

- APPLICATIONS: Thoroughly cleans internal pneumatic tool parts, restoring them to peak performance and prolonging tool life Breaks loose deposits that create friction and impede smooth operation
- Provides long-lasting lubrication
- Protects tools from freezing down to -25°F ■ 12 cans per case

ASCOT NO.	MFG. NO.	DESCRIPTION
181-00404	16-ATL	Blaster Air Tool Conditioner – 16 Oz.
181-01404	ATC-TS	Blaster Air Tool Conditioner - 3.5 Oz. Aerosol



181-01404

SUPER RED PNEUMATIC AIR TOOL LUBRICANT

■ APPLICATIONS: Dissolves gum & varnish formation ■ Prevents gum & varnish formation ■ Ensures smoother starts

■ Special rust & oxidation inhibitor ■ Clean and free running ■ 12 bottles per case





ASCOT NO. MFG. NO. DESCRIPTION

181-00406 0406 Super Red Pneumatic Air Tool Oil, 32 Oz.



181-00406

BLASTER AIR TOOL OIL/LUBE

- **APPLICATIONS:** Provides lubrication & prolongs tool life
- Improves tool performance
- Formulated for use with inline oilers ■ 12 cans per case



ASCOT NO. MFG. NO. DESCRIPTION

181-00016 | 16-ATL | Blaster Air Tool | Oil/Lube - 16 Oz.



MARVEL AIR TOOL OIL

■ APPLICATIONS: Specially formulated for use in all piston type rotary air tools and in-line air lubricators ■ Prevents rust formation while providing positive lubrication for smooth starting and longer tool life ■ Assures maximum performance by dissolving gum and sludge ■ 6 bottles per case

ASCOT NO. MFG. NO. DESCRIPTION

181-00085 MM085 Marvel Air Tool Oil, 32 Oz.



181-00085

KILFROST AIR TOOL OIL

■ Use KILFROST when the temperature drops below 45 degrees F ■ Apply directly into air inlet of tool ■ Do not mix with other air tool lubricant ■ Absorbs moisture, de-ices frozen tools and keeps tools working to -60 degrees F ■ 16 Oz. with squirt spout ■ 12 per case





ASCOT NO. MFG. NO. DESCRIPTION

181-84581 KILFROST- KIIFrost Air Tool



181-84581

ASCOT SUPPLY CORPORATION

Quick Reference Chart (IR), 3/8" Impact Wrenches

Impact Wrenches (IR) Ingersoll Rand



QUICK REFERENCE CHART

IR No.	Ascot No.	Sq. Drive	Std. Bolt Size	Net Weight (lb.)	Average Air Cons. (CFM)	Air Inlet (NPTF)	Min. Hose Size	Working Torque Range (ft./lb.)	Max. Torque (ft./lb.)
IR-212	152-00212	3/8"	7/16"	2.89	2.5	1/4"	3/8"	20-150	180
IR-231HA	152-00231	1/2"	9/16"	5.8	4.2	1/4"	3/8"	25-350	590
IR-2115TiMAX	152-02115	3/8"	7/16"	2-1/2	4	1/4"	3/8"	25-230	250
IR-244A	153-00244	1/2"	9/16"	6	4.2	1/4"	3/8"	40-350	500
IR-2235TiMAX	153-02235	1/2"	9/16"	4.6	6	1/4"	3/8"	75-650	900 (980 rev)
IR-2235QTIMAX	153-32235	1/2"	9/16"	4.7	6	1/4"	3/8"	75-650	870 (930 rev)
IR-2135QXPA	153-22135	1/2"	9/16"	4	6	1/4"	3/8"	50-600	700 (780 rev)
IR-259	154-00259	3/4"	7/8"	8.8	6	3/8"	3/8"	200-800	1050
IR-261	154-00261	3/4"	1"	13.25	9.5	3/8"	1/2"	200-600	1100
IR-2145QiMAX	154-02145	3/4"	1"	7.4	8.5	3/8"	1/2"	200-900	1250 (1350 rev)
IR-271	155-00271	1"	1-1/4"	12.5	9.5	3/8"	1/2"	100-750	1200
IR-285B	155-00285	1"	1-1/4"	27-1/3	10	1/2"	1/2"	100-1000	1600
IR-290	155-00290	1"	1-1/4"	19-3/4	10	1/2"	1/2"	150-1000	1600
IR-293	155-00293	1"	1-3/8"	22-7/8	12	1/2"	1/2"	1000-1600	2000
IR-295	155-00295	1"	1-1/4"	22	10	3/8"	1/2"	100-1000	1450
IR-2161XP	155-02161	1"	1"	11.3	10	3/8"	1/2"	300-1000	1250
IR -2850MAX	155-02850	1"	1-1/4"	19- 7/16	14	1/2"	1/2"	300-1600	2000

3/8" SUPER DUTY AIR IMPACT WRENCH

■ Titanium hammer case ■ 280 ft./lb. of torque will remove even the toughest nuts and bolts

 APPLICATIONS: Transmissions, brakes, exhaust, body repair and underhood



ASCOT NO. 152-02115

MFG. NO.

IR-2115TiMAX

DESCRIPTION 3/8" Super Duty Air Impact Wrench

3/8" SUPER DUTY AIR IMPACT WRENCH

■ Tremendous power and longer life

■ APPLICATIONS: Popular choice of professional mechanics for under car, under hood and bench work - Handle exhaust directs air away from work

■ TORQUE RANGE: 20-150 ft./lb., 180 max.



ASCOT NO.

MFG. NO.

DESCRIPTION

152-00212 IR-212 3/8" Super Duty Air



1/2" & 3/4" Impact Wrenches




Impact Wrenches (IR)

1/2" Super Duty Air Impact Wrench

- Most popular tool in its class
- Offers the sheer power and performance features to tackle the toughest of jobs
- Durable and economical
- TORQUE RANGE: 25-350 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
153-00231	IR-231HA	Standard Anvil
153-02312	IR-231HA-2	Extended Anvil

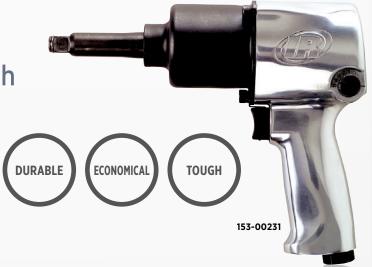

1/2" SUPER DUTY AIR IMPACT WRENCH

■ APPLICATIONS: For tire-changing, shock and spring work, front-end work and other heavy automotive and truck work
■ Pumps out 500 ft //b of torque at a free

■ Pumps out 500 ft./lb. of torque at a free speed of 7,000 RPM ■ IR-244A-2 with a twoinch extended anvil for use with flip sockets

ASCOT NO.	MFG. NO.	DESCRIPTION	4
153-00244	IR-244A	Standard Anvil	153-
153-02442	IR-244A-2	Extended Anvil	133

1/2" ULTRA DUTY TITANIUM AIR IMPACT WRENCH

■ Titanium weighs less and provides greater durability ■ Enhanced Twin Hammer mechanism for fast removal of frozen bolts ■ Push button forward/reverse controls for one-handed operation ■ TORQUE RANGE: 50-600 ft./lb., 625 ft./lb. max (forward), 700 ft./lb. max (reverse)

		153-1223
ASCOT NO.	MFG. NO.	DESCRIPTION
153-02235	IR-2235TiMAX	Standard Anvil
153-12235	IR-2235TiMAX-2	2" Extended Anvil
153-32235	IR-2235QTiMAX	Quiet Version
153-22235	IR-2235QTiMAX-2	Quiet Version with 2" Extended Anvil

1/2" SUPER DUTY AIR IMPACT WRENCH

■ Punish the toughest bolts with
780 ft./lb. of max reverse torque and
1,100 ft./lb. of nut-busting torque,
all powered by Ingersoll Rand's finely
tuned motor and twin-hammer impact
mechanism ■ At only 4.3 pounds, the
2135QXPA is as light as it is powerful
so your hand tires less, letting you
get more work done ■ Ingersoll Rand's
Quiet Technology reduces the sound of the tool, sparing


your ears without sacrificing a single ounce of power

ASCOT NO. MFG. NO. DESCRIPTION

ASCOT NO.		MFG. NO.	DESCRIPTION	
	153-22135	IR-2135QXPA	Standard Anvil	
	153-32135	IR-2135QXPA-2	Extended Anvil	

3/4" SUPER DUTY AIR IMPACT WRENCH

■ Non-biased motor delivers 1,050 ft./lb. of maximum torque in both forward and reverse ■ Two power settings in forward and reverse ■ Variable speed trigger ■ Lighter than other 3/4" impacts in its class ■ Handle-vented exhaust directs air away from the operator ■ Silenced exhaust reduces tool noise while in use









153-32135

155-00295



○ 3/4" & 1" Impact Wrenches

3/4" SUPER DUTY AIR IMPACT WRENCH

■ Powerful 3/4" wrench ■ Combines compact size with high output ■ Ideal for everything from spring work to pinion nut and track pad removal and major engine teardowns ■ Jumbo hammer mechanism delivers up to 1,100 ft./lb. of torque smoothly, with less vibration

ASCOT NO.	MFG. NO.	DESCRIPTION
154-00261	IR-261	Standard Anvil
154-02613	IR-261-3	3" Extended Anvil
154-02616	IR-261-6	6" Extended Anvil



154-22145

3/4" MAXIMUM IMPACT AIR

■ 3/4" Maximum Impact Air Impact Wrench ■ 1350 ft./lb. maximum reverse torque from a tool that weighs just 7.4 lb. and is compact enough to access tight spaces ■ Built to last and designed to withstand tough use in rugged environments ■ An air motor that's 16% more efficient than its predecessor and an easy-to-clean inlet screen means less downtime, better tool performance, and less money spent on compressed air ■ TORQUE RANGE: 200-900 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION	
154-12145	IR-2145QiMAX	Standard Anvil	
154-22145	IR-2145QiMAX-3	3" Extended Anvil	
154-32145	IR-2145QiMAX-6	6" Extended Anvil	

3/4" ULTRA DUTY AIR IMPACT WRENCH

■ Offers all of
the ergonomic,
power and
durability enhancing
features as the IR-2161 but
with a 6" extended anvil for those
hard to reach applications ■ Jumbo
hammer mechanism ■ Up
to 1,200 ft./lb. of torque
■ Trouble-free, longer
performance aided by the
pressure-feed lube system
■ Compact and only 7-5/8"
long ■ Handle exhaust

154-21617

ASCOT NO. MFG. NO. DESCRIPTION

154-21617 | IR-2161XP-6 | 3/4" Ultra Duty Air Impact Wrench

1" HEAVY DUTY AIR IMPACT WRENCH

- Improved 1" drive tool perfect for truck and heavy equipment maintenance
- Offers power and convenience at an affordable price - Compact, lightweight and perfect for working on suspension components
- TORQUE RANGE: 100-1000 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION	
155-00295	IR-295	Standard Anvil	
156-02951	IR-295-S	#5 Spline Drive	

1" D-HANDLE IMPACT WRENCH

■ SOLID STEEL IMPACT MECHANISM: Deliver 2,100 ft./lb. of torque ■ HIGHLY ENGINEERED DESIGN: Delivers the power you need over the life of the tool ■ STEEL CORE DESIGN: Nothing's been proven to last longer ■ CHEMICAL RESISTANT HOUSING & STEEL CORE: Stands up to drops and harsh work environments ■ LIGHTWEIGHT: 25% lighter than the industry's leading 1" wrench ■ 350° AD ILISTABLE HANDLE: The side handle

■ 360° ADJUSTABLE HANDLE: The side handle rotates fully around the tool as the job demands ■ SWIVEL HOSE CONNECTION: Keeps cords from getting tangled so you can move freely around the garage ■ 6" ANVIL EXTENSION: Increases accessibility in hard to reach places







1" Impact Wrenches



Impact Wrenches (IR) (cont.)



- Combines exceptional power, durability and operator convenience
- Delivers 1450 ft./lb. of maximum torque at 90 psi (1770 ft./lb. max torque at 120 psi) with a 5000 RPM free speed and fourposition regulator 360° swivel inlet
- Chemical resistant boot
- Available in 6" extended anvil and 6" extended #5 spline anvil A1:089 or high production truck tire changing







ASCOT NO. MFG. NO.		DESCRIPTION
155-28560	IR-285B	Standard Anvil
155-02856 IR-285B-6		6" Extended Anvil
156-28566	IR-285BS-6	#5 Spline Super Duty Anvil

1" SUPER **DUTY AIR** IMPACT WRENCH

■ 1" drive wrench with 1,000 ft./lb. torque to handle tough jobs in cramped spaces ■ Built-in 155-00280 pressure-feed lube system, adjustable side handle and built-in oil reservoir that provides continuous misting of the air motor • Available in 6" extended anvil and 6" extended #5 spline drive anvil for high production truck tire changing

ASCOT NO.	MFG. NO.	DESCRIPTION		
155-00280	IR-280	Standard Anvil		
155-02806	IR-280-6	6" Extended Anvil		
156-28006	IR-280-S6	#5 Spline Super Duty Anvil		

1" SUPER DUTY AIR IMPACT WRENCH

Designed for getting into cramped spaces with three-way adjustable handle Ideal for spring work, tractor pads, bus maintenance and off-road/farm equipment • TORQUE RANGE: 150-1000 ft./lb. (1600 maximum)



155-00290



■ APPLICATIONS: Most powerful 1" wrench for spring work, tractor pads, bus maintenance and offroad/farm equipment • MAXIMUM TORQUE: 2000 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
155-00293	IR-293	Standard Anvil
156-02931	IR-293-S	#5 Spline Drive

1" ULTRA DUTY AIR **IMPACT WRENCH**

■ High power-to-weight ratio • Full power reverse ■ 3-position power regulator ■ 360° swivel inlet • MAXIMUM TORQUE: 1250 ft./lb.



155-00293

ASCOT NO.	MFG. NO.		
155-21710	IR-2171XP		

DESCRIPTION Standard Anvil









Cordless Impact Wrenches

Cordless Impact Wrench (IR)

1/2" IQv20 Cordless **Impact Wrench**

- 780 ft./lb. reverse torque and 1100 ft./lb. nut-busting torque from a tool weighing just 6.8 lb., best power to weight ratio in its class.
- High-efficiency rare earth magnet motor, high-capacity variable speed trigger, all-metal drive train, and metalreinforced housing enable this tool to stand up to the toughest jobs.
- Optimized balance combined with an ergonomic handle and soft touch over-molded **grip** provide increased comfort in extended use.
- Long life 20V lithium-ion battery delivers highcharge capacity and low internal impedance for maximum power delivery and run time.
- Intelligent battery management system (BMS) provides powerlevel and flow-rate control from the battery to the switch to the motor for optimum efficiency.



ASCOT NO.	MODEL	BATTERIES INCLUDED	DRIVE SIZE	ANVIL	MAX TORQUE FT./LB.	FREE SPEED (RPM)	ВРМ	LENGTH IN.	WEIGHT	VIBRATION (M/S2)	SOUND DBA
153-71521	W7152	1	1/2" (Socket Retaining Ring)	Standard	1000 (1,360)	0-1900	2450	6.7	8.1 lb.	7.6 (3.4)	95.7
153-72522	W7252	1	1/2" (Socket Retaining Ring, 2" Ext)	2" extended	1000 (1,360)	0-1900	2450	8.1	8.1 lb.	7.9 (3.6)	95.3



Air Hammers, Needle Scaler, Die Grinders



Air Hammers & Die Grinders (IR)

SUPER DUTY AIR HAMMER

■ APPLICATIONS: For front-end and heavy exhaust work, riveting, king pin removal, bushing driving and bolt shearing ■ Controls starting strokes precisely with an extra-sensitive tease throttle - Super duty power, at up to 1,725 blows per minute - CHISEL



SHANK DIAMETER: .401"

ASCOT NO 159-00132

MFG. NO. IR-132

Super Duty Air Hammer

DESCRIPTION

HEAVY DUTY ANGLE AIR DIE GRINDER

- For work in confined areas
- Features a right angle head • APPLICATIONS: For grinding, porting, polishing, de-burring, breaking sharp edges
- Self-locking throttle lever ■ Positive grip 1/4" capacity collet chuck

ASCOT NO. 157-00302

MFG NO IR-302B DESCRIPTION

Heavy Duty Angle Air Die Grinder

FOR WORK

AREAS



157-00302

NEEDLE SCALER

■ APPLICATIONS: For surface preparation work involving the cleaning or removal of paint, rust, dirt or weld slag • Durable, dependable and economical



DURABLE & ECONOMICAL

ASCOT NO. 157-00125

MFG. NO. IR-125

DESCRIPTION Needle Scaler 157-00125

HEAVY DUTY AIR DIE GRINDER

■ APPLICATIONS: Designed for porting, light weld grinding and breaking sharp edges

■ 25,000 RPM ■ Self-locking throttle lever ■ Positive grip 1/4" capacity collet chuck with two collet wrenches

ASCOT NO. 157-00308

MFG. NO. IR-308B

DESCRIPTION Heavy Duty Air Die Grinder



157-00308

AIR HAMMER KITS

- Five-piece chisel set in a plastic pouch with .401" shank diameters
- INCLUDES: Edging Tool, Tail Pipe Cutter, Straight Chisel, Cutting Chisel and Pouch



ASCOT NO.	MFG. NO.	DESCRIPTION
171-01151	IR-115K	IR-115 Air Hammer Kit
171-01161	IR-116K	IR-116 Air Hammer Kit
171-01171	IR-117K	IR-117 Air Hammer Kit



171-01161

SUPER DUTY MINI AIR DIE GRINDER

■ APPLICATIONS: For grinding, edge-breaking, de-burring, porting and polishing Rightangle configuration • Compact, lightweight and easy to handle



ASCOT NO.

MFG. NO. IR-307B

EASY T0 **HANDLE**

DESCRIPTION

Super Duty Mini Air Die Grinder



157-00307

157-00307



Air Drills, Tire Buffers

Finishing Tools & Air Drills (IR)

QUICK REFERENCE CHART

IR No.	Ascot No.	Description
IR-301-2MK	157-03012	Surface Conditioning Kit
IR-311A	158-00311	Heavy Duty Dual Action Quiet Air Sander 6" Pad
IR-326	157-00326	Heavy Duty 2-7/8" Air Cut-Off Tool
IR-313A	157-00313	Heavy Duty Angle Air Sander 7" Pad
IR-317A	158-00317	Heavy Duty High Speed Air Sander 5" Pad
IR-319A	158-00319	Heavy Duty Vertical Air Sander 7" Pad

3/8" HEAVY DUTY AIR DRILL

■ Planetary gear reduction balances the load on bearings and gears, increasing tool life - Variable speed throttle makes starting holes easy - Positive action trigger stop reduces maximum speed at any time





1/2" HEAVY **DUTY AIR DRILL**

■ APPLICATIONS: Designed for drilling, hole sawing, cylinder honing and other jobs that call for a 1/2" size ■ Industrial grade 1/2" chuck, ball and needle bearing construction and double reduction planetary gearing for longer life No-load speed of 500 RPM and auxiliary side handle



157-17802

ASCOT NO.	MFG. NO.	DESCRIPTION
157-07803	IR-7803A	Standard Air Drill
157-17803	IR-7803RA	Reversible Air Drill

HIGH SPEED TIRE BUFFER

■ Lever style tease trigger with lock-off for easy operation ■ Quick change chuck for easy buffing



CHANGE **CHUCK**

ASCOT NO. 157-00327

MFG. NO. IR-327

DESCRIPTION High Speed Tire Buffer



HEAVY DUTY AIR LOW SPEED TIRE BUFFER

■ APPLICATIONS: For quick work of patchwork and roughing up low areas for recapping, tire scuffing and cleaning tire moldings ■ Free speed up to 3,000 RPM ■ 1/2 HP motor







ASCOT NO. 157-01327

MFG. NO. IR-327LS DESCRIPTION

Heavy Duty Air Low Speed Tire Buffer, includes Over Hose



86 AIR TOOLS // GRINDERS, BUFFERS, SANDERS & DRILLS (IR)

Sanders, Surface Conditioning Kit



Finishing Tools & Air Drills (IR) (cont.)

HEAVY DUTY AIR ANGLE SANDER 7" PAD

■ Heavy-duty motor handles tough jobs ■ Lightweight at only 4.5 lb. (2.04 kg.) ■ Ball Bearing construction for increased tool life - APPLICATIONS: rouging body filler, removing rust, and smoothing welds



ASCOT NO.

MFG. NO.

DESCRIPTION

157-00313

IR-313A

Heavy Duty Air Angle Sander 7" Pad

HEAVY DUTY DUAL ACTION QUIET AIR SANDER 6" PAD

 A built-in silencer muffles noise as you work ■ **APPLICATIONS**: Quality sander used for feather edging, metal preparation and finish work on body filler





158-00311

ASCOT NO.

MFG. NO.

158-00311 IR-311A DESCRIPTION Heavy Duty Dual Action Quiet Air Sander 6" Pad

SURFACE CONDITIONING KIT

■ KIT INCLUDES: IR301 1/4" angle head die grinder in a blow molded plastic case with two coarse and two medium grit 3" 3M Rolco™ surface conditioning pads, two coarse, two medium grit 2" 3M Rolco™ surface conditioning pads and a disc holder





158-03012

ASCOT NO. 158-03012

MFG. NO.

IR-301-2MK

DESCRIPTION Surface Conditioning Kit





Air Tool Accessories

Air Tool **Accessories**

AIR TOOL LUBRICANTS

ASCOT NO.	MFG. NO.	DESCRIPTION
181-10510	105-LBK1	4 Oz. IR 105 Grease, 4 oz. IR10 Oil & Grease Gun Head
181-10540	105-4T	(6) 4 oz. Tubes - IR 105 Grease Refills
181-11510	115-LBK1	4 oz. IR 115 Grease, 4 oz. IR10 Oil & Grease Gun Head
181-11540	115-4T	(6) 4 oz. Tubes - IR 115 Grease Refills
181-12228	R000A2-228	Grease Gun
328-10001	100-1	1 lb. Grease for Impact Wrenches

181-10510

AIR TOOL COVERS

 Vinyl boots also absorb some of the tool vibration and protect air impact ratchets, wrenches and drills from external damage

IR TOOL NO.	KIT NO.	ASCOT TOOL NO.
212	212-Boot	176-20232
211	211-P32	176-21132
231C, 231HA-2	231-Boot	176-23122
2235	2235M-Boot	176-13532
244A, 244A-2	244-Boot	176-24432
261, 261-2, 271	261-Boot	176-26132
285B-6, 285BS-6, 285B	285-Boot	176-28532
259	259-Boot	176-25925
2135QXPA, 2135QXPA-2	2135M-Boot	176-21350

HAMMER MECHANISM TUNE-UP KIT

■ INCLUDES: the anvil, hammer (or pins) and gaskets for the impact mechanism ■ 110-TK1 includes only the cam ball, two anvil pins and anvil spring

IR TOOL NO.	KIT NO.	ASCOT TOOL NO.
231C, 244A	231-THK1	176-00231
231-2HA-2, 244A-2	231-THK2	178-01231
2235TiMAX	2235-THK1	178-02235
2135QXPA-2	2135-THK1	178-02335



178-02135

RETAINING RINGS

IR TOOL NO.	ASCOT TOOL NO.	DESCRIPTION
231-425A	175-31425	Socket Retainer for IR231, 231-2
R1A-159	175-01590	Retainer O-Ring for IR 231, 231-2
291-425	175-91425	Socket Retainer for IR-281, 285
291-426	175-81426	Retainer O-Ring for IR-281, 285

MOTOR TUNE-UP KITS

■ INCLUDES: the vanes, gaskets and seals for a complete tune-up • 231-TK3 also includes ball bearings

IR TOOL NO.	KIT NO.	ASCOT TOOL NO.
212	212-TK2	176-10212
231C, 231HA-2	231-TK3	176-10221
235	235-TK3	176-12313
244A, 244A-2	244-TK2	176-10244
261, 271	261-TK2	176-10261
280 Series	280-TK2	176-10280
7803A, 7803RA	7803-TK1	176-17803
285B-6	285B-TK1	176-10285
2235TiMAX	2235-TK1	176-22235
2135QXPA, 2135QXPA-2	2135-TK2	176-32135

IMPACT WRENCH ACCESSORIES

ASCOT NO.	MFG. NO.	DESCRIPTION	
175-23142	IR 231-425	IR 1/2" Impact Wrench Retainer Clip	
175-33104	231-Boot	Red Protective Boot for IR 231HA-2 Impact Wrenches	
175-82651	H-082651	1" Impact Wrench Retainer Clip O-Ring	
175-83071	P-08371	O-Ring for 1/2" Impact Wrench Retainer Clips	



INDUSTRIAL STRENGTH SILICONE LUBRICANT

■ Teflon[™] fluoropolymer enhances performance

■ Long-lasting lubrication ■ Won't accumulate ■ dust & dirt

■ QUANTITY: 12 per case

MFG. NO.

ASCOT NO.





328-00016

328-00016 16-SL Blaster Silicone Lubricant - 11 Oz.

DESCRIPTION



Tool Caddy, Mobile Wheel Work Station, Tire Tool Station

Work Stations

A. TOOL CADDY TIRE **TOOL STAND**

Provides easy and fast access to all those tools needed quickly when changing tires such as torque sockets, valve stem pullers, hub cap tools, air impact guns and torque sticks ■ Reduces installation time ■ Makes tire changing easier & work stations more organized • Reduces the number of trips for the technician by having all tools needed at their fingertips • WEIGHT: 35 lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
319-50015	MTTS	Tool Caddy Tire Tool Stand

B. MOBILE WHEEL **WORK STATION**

 Features gas-strut assisted boom that supports the weight of those heavy impact wrenches • The suspended impact wrench is capable of rotating to the operator desired position ■ Features side and rear storage compartments designed to organize sockets, tire irons, lubricants, hoses and various wheel parts ■ Air wrench is supported and held in desired position Air wrench suspension boom allows for directional freedom and reduces damage

ASCOT NO.	MFG. NO.	DESCRIPTION
515-00555	WS-005	Mobile Wheel Work Station

C. TIRE TOOL STATION

 Organize your tools
 Universal top tray with slots for torque sockets, etc. ■ Dual cradles for impact guns, 1/4" airline connections • INCLUDES: (2) 25' x 3/8" recoil hoses with 1/4" swivel fittings

ASCOT NO.	MFG. NO.	DESCRIPTION
515-02400	2400	Tire Tool Station



