

# TIRE REPAIR MATERIALS

Cements, Sealants & Patches

Air Buffers & Drills

Tire Repair Tools & Accessories

Tire Spreaders & Repair Stations

Cabinets & Storage



# Cements, Sealants & Patches

## RADIAL RX REINFORCED PATCHES

- Specially designed for small nail hole repair on radial passenger, performance, light truck and truck tires
- Perfect for tread area and sidewall repair



| ASCOT NO. | MFG. NO. | DESCRIPTION                | SIZE (IN.)        | QTY./UNIT |
|-----------|----------|----------------------------|-------------------|-----------|
| 571-00010 | RAD-0    | Reinforced Nail Hole Patch | 1-9/16" x 1-9/16" | 10        |
| 571-00011 | RAD-1N   | Reinforced Nail Hole Patch | 2-3/4" x 2"       | 20        |

## SECTION REPAIR ID PATCHES

- Universally accepted method for marking section repairs on radial truck tires • Blue triangle identification patches are a must for any dealer, retreader or fleet performing sidewall, shoulder or tread area section repairs



| ASCOT NO. | MFG. NO. | DESCRIPTION        | QTY./UNIT |
|-----------|----------|--------------------|-----------|
| 569-00090 | 90       | Section ID Patches | 50        |
| 569-00091 | 90B      | Section ID Patches | 1000      |

## RAD-100 SERIES RADIAL REPAIR UNIT

- REMA TIP TOP offers a variety of radial-ply repair units to meet the diverse demands of today's passenger, truck, and OTR tire applications • Due to our fully-integrated blue bonding layer and center over injury design, REMA TIP TOP Radial-Ply repair units are suitable for use with all current vulcanizing systems • For best results, always select the corresponding REMA TIP TOP Stem insert unit, carbide cutter and Special Cement BL (non flammable) or Special Blue Cement (flammable) product for a permanent, reliable repair




| ASCOT NO. | MFG. NO. | DESCRIPTION        | PLIES | SIZE (IN.)      | QTY./UNIT |
|-----------|----------|--------------------|-------|-----------------|-----------|
| 575-00110 | RAD-110  | Radial repair unit | 1     | 2 x 2-3/4       | 20        |
| 575-00115 | RAD-115  | Radial repair unit | 1     | 3-1/2 x 3       | 20        |
| 575-00116 | RAD-116  | Radial repair unit | 1     | 2-5/8 x 4       | 10        |
| 576-00120 | RAD-120  | Radial repair unit | 2     | 4-7/8 x 3       | 10        |
| 576-00122 | RAD-122  | Radial repair unit | 2     | 6-7/8 x 3       | 10        |
| 576-00124 | RAD-124  | Radial repair unit | 2     | 8-1/2 x 3       | 10        |
| 576-00125 | RAD-125  | Radial repair unit | 3     | 4-1/2 x 4-7/8   | 10        |
| 576-00128 | RAD-128  | Radial repair unit | 3     | 2-7/8 x 13-1/8  | 10        |
| 576-00135 | RAD-135  | Radial repair unit | 4     | 5-7/8 x 8       | 10        |
| 576-00140 | RAD-140  | Radial repair unit | 3     | 7-7/8 x 3-15/16 | 10        |
| 576-00142 | RAD-142  | Radial repair unit | 4     | 10-1/4 x 5      | 10        |
| 576-00144 | RAD-144  | Radial repair unit | 4     | 13 x 5          | 10        |
| 577-00146 | RAD-146  | Radial repair unit | 4     | 7-1/4 x 17-1/4  | 5         |
| 577-00150 | RAD-150  | Radial repair unit | 5     | 23 x 7-1/8      | 5         |
| 577-00152 | RAD-152  | Radial repair unit | 5     | 23 x 9-1/2      | 3         |
| 577-00155 | RAD-155  | Radial repair unit | 5     | 10-1/4 x 13-1/8 | 5         |
| 577-00156 | RAD-156  | Radial repair unit | 7     | 29 x 10-1/2     | 3         |
| 577-00160 | RAD-160  | Radial repair unit | 7     | 40 x 10-1/4     | 3         |
| 577-00162 | RAD-162  | Radial repair unit | 7     | 13 x 41-1/4     | 1         |
| 577-00165 | RAD-165  | Radial repair unit | 6     | 13-1/8 x 16-3/4 | 3         |
| 577-00168 | RAD-168  | Radial repair unit | 7     | 14 x 30-3/8     | 1         |
| 577-00175 | RAD-175  | Radial repair unit | 8     | 18 x 21-3/4     | 3         |
| 577-00180 | RAD-180  | Radial repair unit | 2     | 7-3/4 x 6       | 5         |
| 577-00182 | RAD-182  | Radial repair unit | 3     | 10 x 7-1/2      | 5         |
| 577-00184 | RAD-184  | Radial repair unit | 3     | 11-1/2 x 8-1/2  | 5         |
| 577-00185 | RAD-185+ | Radial repair unit | 8     | 28-3/4 x 20-7/8 | 1         |
| 577-00186 | RAD-186  | Radial repair unit | 2     | 13-1/2 x 9-3/4  | 5         |
| 577-00188 | RAD-188  | Radial repair unit | 2     | 18 x 11-1/4     | 5         |
| 577-00190 | RAD-190  | Radial repair unit | 2     | 22 x 15-3/8     | 3         |



## RADIAL TIRE REPAIR UNITS (ARAMID)

• Today's varied tire designs, unique wheel applications and demanding driving conditions require a broad range of tire repair products. REMA TIP TOP's ARAMID repair units are lightweight, provide optimal flexibility and will prove to be the most reliable truck repair units you have ever handled • For best results, always select the corresponding REMA TIP TOP Stem insert unit, carbide cutter & Special Blue Cement (flammable) for a permanent, reliable repair • Precise contour suits critical positions in low-profile tires • High strength ARAMID belts do not elongate, thus reducing repair bulge

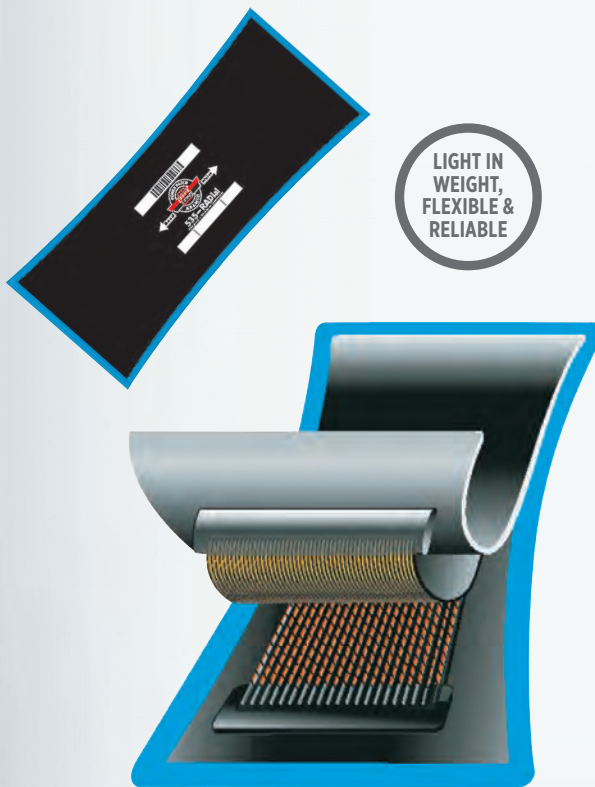

Magnified view of the 576-00535

| ASCOT NO. | MFG. NO.          | DESCRIPTION                                 | SIZE (IN.)        | QTY./UNIT |
|-----------|-------------------|---------------------------------------------|-------------------|-----------|
| 576-00531 | RAD-531<br>Aramid | Radial Repair Unit<br>for Low Profile Tires | 3-7/16 x<br>6-1/2 | 10        |
| 576-00533 | RAD-533<br>Aramid | Radial Repair Unit<br>for Low Profile Tires | 4-3/8 x 8         | 10        |
| 576-00535 | RAD-535<br>Aramid | Radial Repair Unit<br>for Low Profile Tires | 4-3/8 x 10        | 10        |
| 576-00537 | RAD-537<br>Aramid | Radial Repair Unit<br>for Low Profile Tires | 4-3/8 x<br>11-1/4 | 10        |
| 576-00539 | RAD-539<br>Aramid | Radial Repair Unit<br>for Low Profile Tires | 4-1/2 x<br>12-3/4 | 10        |

## RAD 500 ARAMID REPAIR UNITS FOR AGRICULTURAL TIRES

• Easier application due to an increased flexibility • Less heat generation • Optimized weight, therefore less influence on the tires balance and a better rolling behavior • Better dynamic behavior which avoids tensions between tire and patch • Repair material for the new generation of Agricultural tires (high speed, low pressure) • Can be used in a Chemical or Heat Cure environment

EASIER  
APPLICATION



| ASCOT NO. | MFG. NO.          | DESCRIPTION                                  | SIZE (IN.)   | SIZE (MM)    | QTY./UNIT |
|-----------|-------------------|----------------------------------------------|--------------|--------------|-----------|
| 576-00581 | RAD-581<br>ARAMID | Radial Repair Unit for<br>Agricultural Tires | 8.2 x 6.6    | 208 x<br>168 | 5         |
| 576-00583 | RAD-583<br>ARAMID | Radial Repair Unit for<br>Agricultural Tires | 10 x 8       | 258 x<br>203 | 5         |
| 576-00585 | RAD-585<br>ARAMID | Radial Repair Unit for<br>Agricultural Tires | 14.25 x 9.1  | 363 x<br>233 | 5         |
| 576-00587 | RAD-587<br>ARAMID | Radial Repair Unit for<br>Agricultural Tires | 18 x 11.3    | 458 x<br>288 | 5         |
| 576-00589 | RAD-589<br>ARAMID | Radial Repair Unit for<br>Agricultural Tires | 23.75 x 13.5 | 603 x<br>343 | 3         |



## Cements, Sealants & Patches (cont.)

### REMA RED EDGE TUBE PATCHES

- Feature double-scalloped feathered edges to ensure perfect bonding and complete vulcanization • A unique rubber compound allows the patch to stretch evenly and equally in all directions • Use vulcanizing fluid 203 or 204



541-00400



541-00410



541-00420



541-00430



541-00440



541-00450



541-00470



541-00460



541-00472

| ASCOT NO. | MFG. NO. | DESCRIPTION           | UNITS/BOX |
|-----------|----------|-----------------------|-----------|
| 541-00400 | 0        | 1-1/4" Round Tube     | 100       |
| 541-00410 | 1        | 1-1/2" Round Tube     | 30        |
| 541-00420 | 2        | 1-3/4" Round Tube     | 30        |
| 541-00430 | 3        | 2" Round Tube         | 30        |
| 541-00440 | 4        | 3" Round Tube         | 30        |
| 541-00450 | 5        | 3-3/4" Round Tube     | 10        |
| 541-00460 | 6        | 4" Round Tube         | 10        |
| 541-00470 | 7        | 3" x 1-1/2" Oval Tube | 30        |
| 541-00472 | 7B       | 6" x 2" Oval Tube     | 10        |

### REMA STEM INSERTS AND ACCESSORIES

- REMA TIP TOP's pre-cured, self-vulcanizing inserts are specially contoured for easy installation • For best results always select the corresponding REMA TIP TOP repair unit, carbide cutter and Special Blue Cement (flammable) for a permanent, reliable repair



582-19420



582-19621



582-19311


| ASCOT NO. | MFG. NO.  | DESCRIPTION             | INJURY (IN.) | QTY./UNIT |
|-----------|-----------|-------------------------|--------------|-----------|
| 582-19621 | 193-WL-10 | REMA STEM 6 (Wire Lead) | max 1/4      | 10        |
| 582-19820 | RS-8      | REMA STEM 8             | max 5/16     | 60        |
| 582-19420 | RS-10     | REMA STEM 10            | max 3/8      | 20        |
| 582-19430 | RS-12     | REMA STEM 12            | max 1/2      | 20        |
| 582-19311 | 193-WL-50 | REMA STEM 6 (Wire Lead) | max 1/4      | 50        |
| 582-19410 | 194       | REMA STEM 8 (RS-8)      | max 5/16     | 10        |

468-01120 VT-1120L Insertion Pulling Wires (626)



## REMA MINICOMBI REPAIR UNITS & ACCESSORIES

- REMA TIP TOP's most popular unit for crown repair of passenger/light truck tires • Our MINICOMBI's are available in a wide range of sizes and establish new standards in one-piece repair technology
- For best results always use with REMA TIP TOP carbide cutters and Special Blue Cement (flammable) for a permanent, reliable repair
- Improved Blue coating enhances the bonding process

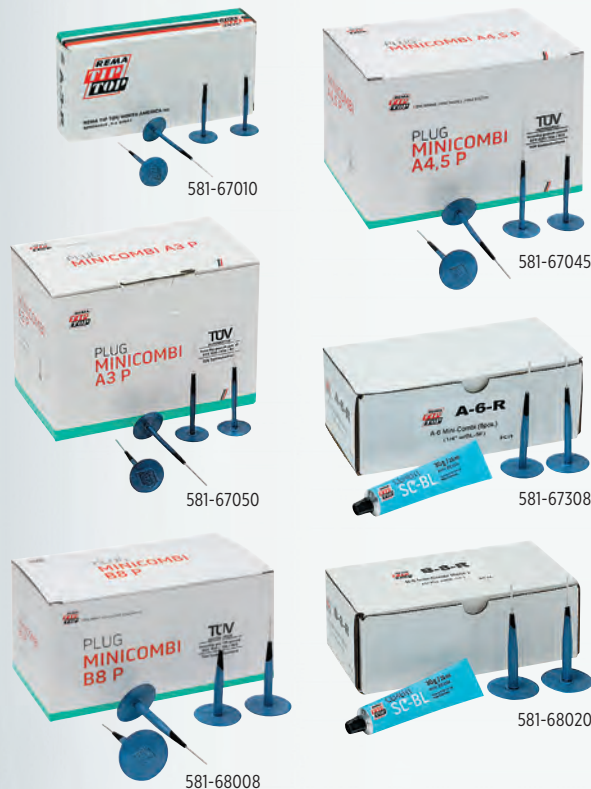

| ASCOT NO. | MFG. NO. | DESCRIPTION                           | UNITS/BOX |
|-----------|----------|---------------------------------------|-----------|
| 537-00190 | 190      | Awl for Remastem & Minicombi Repairs  | —         |
| 537-00199 | 199      | Rasp for Remastem & Minicombi Repairs | —         |
| 581-67050 | A3       | 1/8" Minicombi                        | 50        |
| 581-67010 | A3-R     | 1/8" Minicombi                        | 10        |
| 581-67045 | A4.5     | 3/16" Minicombi                       | 40        |
| 581-67340 | A6       | 1/4" Minicombi                        | 40        |
| 581-67308 | A6-R     | 1/4" Minicombi                        | 8         |
| 581-68008 | B8-MC    | 5/16" Minicombi                       | 20        |
| 581-68020 | B8-MC-R  | 5/16" Minicombi                       | 8         |
| 581-68418 | B10      | 3/8" Minicombi                        | 20        |
| 581-68406 | B10-R    | 3/8" Minicombi                        | 6         |

## UNIVERSAL PATCH

- REMA TIP TOP's rubber-reinforced, universal repair units are specially formulated to provide maximum flexibility and strength • These non-directional, center over injury repair units perform flawlessly in both radial or bias-ply tire designs
- For best results, always select the corresponding REMA TIP TOP Stem insert unit, carbide cutter and Special Blue Cement (flammable) product for a permanent, reliable repair



| ASCOT NO. | MFG. NO. | SIZE  | QTY.        |
|-----------|----------|-------|-------------|
| 550-26707 | UP-3     | 1/8"  | 100         |
| 550-26714 | UP-4.5P  | 3/16" | 300 in Pail |
| 550-26721 | UP-6     | 1/4"  | 50          |
| 550-26738 | UP-6P    | 1/4"  | 200 in Pail |
| 550-26745 | UP-8     | 5/16" | 50          |
| 550-26752 | UP-8P    | 5/16" | 150 in Pail |



## Cements, Sealants & Patches (cont.)

### AGRICULTURAL AND OTR TIRES/ PN SERIES BIAS-PLY REPAIR UNITS

- 90° cord angle of the plies provides greater compatibility with the flexing action of the tire as it operates under load, plus it also makes the patch more flexible for easier installation
- A new concept in rubber compounding of the ply-end cover strip eliminates cord breakout at the end of the plies
- Two different ply levels for each size patch provide better compatibility of the repair unit to the ply rating of the tire
- Flexibility in patch/injury size optimization for improved performance
- Eliminates need for "S" (Sidewall) patches in the smaller sizes
- Reduced buffing requirement due to the smaller size of the patch
- Use Blue Bonding cement



568-05000



568-05200



568-05400

| ASCOT NO. | MFG. NO. | SIZE (IN.) | SIZE (MM) | # PLIES | QTY./ BOX |
|-----------|----------|------------|-----------|---------|-----------|
| 568-05000 | PN-50    | 9-1/2"     | 240mm     | 4       | 3         |
| 568-05010 | PN-050+  | 9-1/2"     | 240mm     | 6       | 3         |
| 568-05200 | PN-052   | 14"        | 360mm     | 6       | 3         |
| 568-05210 | PN-052+  | 14"        | 360mm     | 8       | 3         |
| 568-05400 | PN-054   | 19"        | 480mm     | 8       | 2         |
| 568-05410 | PN-054+  | 19"        | 480mm     | 10      | 2         |
| 568-05600 | PN-056   | 26"        | 660mm     | 10      | 2         |
| 568-05610 | PN-056+  | 26"        | 660mm     | 12      | 2         |
| 567-05620 | PN-056S  | 26"        | 660mm     | 10      | 2         |
| 568-05800 | PN-058   | 32"        | 810mm     | 12      | 1         |
| 568-05810 | PN-058+  | 32"        | 810mm     | 14      | 1         |
| 567-05820 | PN-058S  | 32"        | 810mm     | 12      | 1         |
| 567-05821 | PN-058S+ | 32"        | 810mm     | 14      | 1         |

### REMA TIP TOP BIAS-PLY TIRE REPAIR UNITS

- REMA TIP TOP offers a wide selection of bias-ply (cross-ply) repair units for applications on passenger, truck, OTR, agricultural and industrial bias-ply tires
- Due to our fully-integrated blue bonding layer, REMA TIP TOP bias-ply repair units are suitable for use with all current vulcanizing systems
- For best results, always select the corresponding REMA TIP TOP Stem insert unit, carbide cutter and Special Blue Cement (flammable) for a permanent, reliable repair



| ASCOT NO. | MFG. NO. | SIZE (IN.) | SIZE (MM) | # PLIES | QTY./ BOX |
|-----------|----------|------------|-----------|---------|-----------|
| 562-26006 | PN-0     | 1-9/16     | 39.7      | 1       | 50        |
| 562-26037 | PN-3     | 4          | 101.6     | 2       | 10        |
| 562-26044 | PN-4     | 5-3/4      | 146       | 2       | 10        |
| 562-26051 | PN-5     | 6-1/2      | 165       | 4       | 10        |
| 562-26068 | PN-6     | 9-1/4      | 235       | 6       | 10        |
| 562-26075 | PN-7     | 11-3/4     | 298.5     | 6       | 10        |
| 562-26082 | PN-8     | 13-1/2     | 343       | 6       | 5         |
| 562-26099 | PN-9     | 15-1/2     | 393       | 8       | 3         |
| 562-26109 | PN-10    | 17-3/4     | 450.8     | 8       | 3         |
| 563-00200 | PN-20    | 10         | 254       | 4       | 10        |
| 563-00210 | PN-21    | 14-1/2     | 368.3     | 4       | 5         |
| 563-00220 | PN-22    | 20         | 508       | 4       | 3         |
| 563-00230 | PN-23    | 10         | 254       | 6       | 10        |
| 563-00240 | PN-24    | 14-1/2     | 368.3     | 6       | 5         |
| 563-00250 | PN-25    | 20         | 508       | 6       | 3         |
| 563-00400 | PN-40    | 7          | 177.8     | 4       | 2         |
| 563-00410 | PN-41    | 8-3/4      | 222.3     | 6       | 2         |
| 563-00420 | PN-42    | 10-1/4     | 260.3     | 8       | 2         |
| 562-26212 | FRU1-MP  | 2-1/2      | 63        | 1       | 25        |
| 562-26213 | FRU1-P   | 2-1/2      | 63        | 1       | 100       |
| 562-26314 | FRU2-MP  | 3-1/4      | 82.55     | 2       | 25        |
| 562-26315 | FRU2-P   | 3-1/4      | 82.55     | 2       | 100       |



## REMA GTR RADIAL REPAIR UNITS

- These repair units are designed for use in section repairs in RADIAL OTR TIRES • They are intended for use in heat cure systems (Autoclaves, Section Molds, Molds or Strap Type Curing Systems)
- Their "center over injury" design makes them a very convenient and easy type of repair • Used with uncured black floater gum, they provide added adhesion in all types of repairs • SHELF LIFE FOR UNCURED & HEAT CURE REPAIR UNITS: 1 Year from Date of Manufacture; Clothback REPAIR UNITS: 4 Years from Date of Manufacture

FOR RADIAL  
OTR TIRES

"CENTER  
OVER  
INJURY"  
DESIGN



526-10052



526-12046

| ASCOT NO.                                  | MFG. NO.  | DESCRIPTION | SIZE (IN.) | SIZE (MM) | # PLIES | QTY./ BOX |
|--------------------------------------------|-----------|-------------|------------|-----------|---------|-----------|
| <b>GTR RADIAL REPAIR UNITS - UNCURED</b>   |           |             |            |           |         |           |
| 526-10046                                  | 10 046 RU | GTR - UC 46 | 16 x 5     | 405 x 125 | 4       | 5         |
| 526-10050                                  | 10 050 RU | GTR - UC 50 | 22 x 7.5   | 560 x 190 | 5       | 5         |
| 526-10052                                  | 10 052 RU | GTR - UC 52 | 22 x 9.5   | 560 x 240 | 6       | 2         |
| 526-10056                                  | 10 056 RU | GTR - UC 56 | 28 x 10.5  | 710 x 265 | 7       | 2         |
| 526-10060                                  | 10 060 RU | GTR - UC 60 | 38 x 10.5  | 965 x 265 | 8       | 2         |
| <b>GTR RADIAL REPAIR UNITS - HEAT CURE</b> |           |             |            |           |         |           |
| 526-12046                                  | 12 046 RH | GTR - HC 46 | 16 x 5     | 405 x 125 | 4       | 5         |
| 526-12050                                  | 12 050 RH | GTR - HC 50 | 22 x 7.5   | 560 x 190 | 5       | 5         |
| 526-12052                                  | 12 052 RH | GTR - HC 52 | 22 x 9.5   | 560 x 240 | 6       | 2         |
| 526-12056                                  | 12 056 RH | GTR - HC 56 | 28 x 10.5  | 710 x 265 | 7       | 2         |
| 526-12060                                  | 12 060 RH | GTR - HC 60 | 38 x 10.5  | 965 x 265 | 8       | 2         |
| <b>GTR RADIAL REPAIR UNITS - CLOTHBACK</b> |           |             |            |           |         |           |
| 526-12146                                  | 12 046 RC | GTR - CB 46 | 16 x 5     | 405 x 125 | 4       | 5         |
| 526-12150                                  | 12 050 RC | GTR - CB 50 | 22 x 7.5   | 560 x 190 | 5       | 5         |
| 526-12152                                  | 12 052 RC | GTR - CB 52 | 22 x 9.5   | 560 x 240 | 6       | 2         |
| 526-12156                                  | 12 056 RC | GTR - CB 56 | 28 x 10.5  | 710 x 265 | 7       | 2         |
| 526-12160                                  | 12 060 RC | GTR - CB 60 | 38 x 10.5  | 965 x 265 | 8       | 2         |

## REMA GTR BASKET RADIAL REPAIR UNITS

- These repairs are designed to give the needed flexibility and extra support for shoulder and sidewall injuries of RADIAL OTR TIRES • They provide the ability to repair larger injuries than standard radial "center over the injury" repair units • SHELF LIFE FOR UNCURED & HEAT CURE REPAIR UNITS: 1 Year from Date of Manufacture; Clothback REPAIR UNITS: 4 Years from Date of Manufacture

FOR RADIAL  
OTR TIRES

"CENTER  
OVER  
INJURY"  
DESIGN



525-10138



525-11348

| ASCOT NO.                                         | MFG. NO.   | DESCRIPTION    | SIZE (IN.) | SIZE (MM) | # PLIES | QTY./ BOX |
|---------------------------------------------------|------------|----------------|------------|-----------|---------|-----------|
| <b>GTR BASKET RADIAL REPAIR UNITS - UNCURED</b>   |            |                |            |           |         |           |
| 525-10136                                         | 10 016 BRU | GTR-B - UC 016 | 16 x 5     | 405 x 125 | 5       | 6         |
| 525-10137                                         | 10 020 BRU | GTR-B - UC 020 | 20 x 9     | 510 x 230 | 5       | 6         |
| 525-10138                                         | 10 027 BRU | GTR-B - UC 027 | 27 x 10    | 685 x 255 | 2       | 7         |
| 525-10139                                         | 10 038 BRU | GTR-B - UC 038 | 38 x 10    | 965 x 255 | 2       | 7         |
| <b>GTR BASKET RADIAL REPAIR UNITS - HEAT CURE</b> |            |                |            |           |         |           |
| 525-11345                                         | 12 016 BRH | GTR-B - HC 016 | 16 x 5     | 405 x 125 | 5       | 6         |
| 525-11346                                         | 12 080 BRH | GTR-B - HC 020 | 20 x 9     | 510 x 230 | 5       | 6         |
| 525-11347                                         | 12 027 BRH | GTR-B - HC 027 | 27 x 10    | 685 x 255 | 2       | 7         |
| 525-11348                                         | 12 038 BRH | GTR-B - HC 038 | 38 x 10    | 965 x 255 | 2       | 7         |
| <b>GTR BASKET RADIAL REPAIR UNITS - CLOTHBACK</b> |            |                |            |           |         |           |
| 525-11349                                         | 12 016 BRC | GTR-B - CB 016 | 16 x 5     | 405 x 125 | 5       | 6         |
| 525-11350                                         | 12 020 BRC | GTR-B - CB 020 | 20 x 9     | 510 x 230 | 5       | 6         |
| 525-11351                                         | 12 027 BRC | GTR-B - CB 027 | 27 x 10    | 685 x 255 | 2       | 7         |
| 525-11352                                         | 12 038 BRC | GTR-B - CB 038 | 38 x 10    | 965 x 255 | 2       | 7         |



## Cements, Sealants & Patches (cont.)

### REMA OTR BASKET BIAS REPAIR UNITS

- The OTR-B-UC unit is engineered and constructed to create maximum flexibility
- The ply strips are positioned in a basket weave pattern creating the strength and flexibility needed for reinforcement or section repair
- SHELF LIFE FOR UNCURED & HEAT CURE REPAIR UNITS: 1 Year from Date of Manufacture; Clothback REPAIR UNITS: 4 Years from Date of Manufacture

MAXIMUM  
FLEXIBILITY

BASKET  
WEAVE  
PATTERN



526-11118



526-11136

| ASCOT NO.                                       | MFG. NO.  | DESCRIPTION    | SIZE (IN.)    | SIZE (MM) | # PLIES | QTY./ BOX |
|-------------------------------------------------|-----------|----------------|---------------|-----------|---------|-----------|
| <b>OTR BASKET BIAS REPAIR UNITS - UNCURED</b>   |           |                |               |           |         |           |
| 526-11115                                       | 10 104 BU | OTR-B - UC 04  | 7.5 x 7.5     | 190 x 190 | 10      | 4         |
| 526-11116                                       | 10 106 BU | OTR-B - UC 06  | 9.75 x 9.75   | 245 x 245 | 10      | 6         |
| 526-11117                                       | 10 108 BU | OTR-B - UC 08  | 12.25 x 12.25 | 310 x 310 | 10      | 6         |
| 526-11118                                       | 10 110 BU | OTR-B - UC 010 | 14.25 x 14.25 | 360 x 360 | 5       | 8         |
| 526-11119                                       | 10 112 BU | OTR-B - UC 012 | 16.25 x 16.25 | 410 x 410 | 5       | 8         |
| 526-11120                                       | 10 114 BU | OTR-B - UC 014 | 18.25 x 18.25 | 465 x 465 | 5       | 10        |
| 526-11121                                       | 10 116 BU | OTR-B - UC 016 | 20.25 x 20.25 | 515 x 515 | 2       | 10        |
| 526-11122                                       | 10 118 BU | OTR-B - UC 018 | 22.75 x 22.75 | 575 x 575 | 1       | 12        |
| 526-11123                                       | 10 120 BU | OTR-B - UC 020 | 26.75 x 26.75 | 680 x 680 | 1       | 14        |
| <b>OTR BASKET BIAS REPAIR UNITS - HEAT CURE</b> |           |                |               |           |         |           |
| 526-11124                                       | 12 104 BH | OTR-B - HC 04  | 7.5 x 7.5     | 190 x 190 | 10      | 4         |
| 526-11125                                       | 12 106 BH | OTR-B - HC 06  | 9.75 x 9.75   | 245 x 245 | 10      | 6         |
| 526-11126                                       | 12 108 BH | OTR-B - HC 08  | 12.25 x 12.25 | 310 x 310 | 10      | 6         |
| 526-11127                                       | 12 110 BH | OTR-B - HC 010 | 14.25 x 14.25 | 360 x 360 | 5       | 8         |
| 526-11128                                       | 12 112 BH | OTR-B - HC 012 | 16.25 x 16.25 | 410 x 410 | 5       | 8         |
| 526-11129                                       | 12 114 BH | OTR-B - HC 014 | 18.25 x 18.25 | 465 x 465 | 5       | 10        |
| 526-11130                                       | 12 116 BH | OTR-B - HC 016 | 20.25 x 20.25 | 515 x 515 | 2       | 10        |
| 526-11131                                       | 12 118 BH | OTR-B - HC 018 | 22.75 x 22.75 | 575 x 575 | 1       | 12        |
| 526-11132                                       | 12 120 BH | OTR-B - HC 020 | 26.75 x 26.75 | 680 x 680 | 1       | 14        |
| <b>OTR BASKET BIAS REPAIR UNITS - CLOTHBACK</b> |           |                |               |           |         |           |
| 526-11133                                       | 12 104 BC | OTR-B - CB 04  | 7.5 x 7.5     | 190 x 190 | 10      | 4         |
| 526-11134                                       | 12 106 BC | OTR-B - CB 06  | 9.75 x 9.75   | 245 x 245 | 10      | 6         |
| 526-11135                                       | 12 108 BC | OTR-B - CB 08  | 12.25 x 12.25 | 310 x 310 | 10      | 6         |
| 526-11136                                       | 12 110 BC | OTR-B - CB 010 | 14.25 x 14.25 | 360 x 360 | 5       | 8         |
| 526-11137                                       | 12 112 BC | OTR-B - CB 012 | 16.25 x 16.25 | 410 x 410 | 5       | 8         |
| 526-11138                                       | 12 114 BC | OTR-B - CB 014 | 18.25 x 18.25 | 465 x 465 | 5       | 10        |
| 526-11139                                       | 12 116 BC | OTR-B - CB 016 | 20.25 x 20.25 | 515 x 515 | 2       | 10        |
| 526-11140                                       | 12 118 BC | OTR-B - CB 018 | 22.75 x 22.75 | 575 x 575 | 1       | 12        |
| 526-11141                                       | 12 120 BC | OTR-B - CB 020 | 26.75 x 26.75 | 680 x 680 | 1       | 14        |

### COLD VULCANIZING FLUID

- Designed for the vulcanization of tube patches, valve patches and rubber-based tube valve repair units



501-00203

501-00204

| ASCOT NO. | MFG. NO. | DESCRIPTION                                           | QTY./ BOX |
|-----------|----------|-------------------------------------------------------|-----------|
| 501-00201 | 201      | Cold Vulcanizing Fluid 25 Gm. Tube                    | 1         |
| 501-00202 | 202      | Cold Vulcanizing Fluid 50 Gm. Tube w/Brush            | 1         |
| 501-00203 | 203-F    | Cold Vulcanizing Fluid, Flammable, 8 Oz. Can w/ Brush | 10        |
| 501-00204 | 204-F    | Cold Vulcanizing Fluid, Flammable, 32 Oz. Can         | 10        |
| 501-00205 | 205      | Cold Vulcanizing Fluid 1 Gallon                       | 1         |

### PRE-BUFF CLEANER

- Specially formulated to dissolve mold-release lubricants and other contaminants creating a clean surface prior to innerliner buffing
- Available in spout-top liquid or spray-top aerosol dispensers
- CFC-free formula requires shorter drying times
- Same formula for tube or tire preparation



505-00171

| ASCOT NO. | MFG. NO. | DESCRIPTION                                        | QTY./ BOX |
|-----------|----------|----------------------------------------------------|-----------|
| 505-00071 | 71       | Pre-Buff Rubber Cleaner 1 Qt. Spout Top Can        | 6         |
| 505-00170 | 70F      | Pre-Buff Cleaner (Flammable) - 16 Oz.              | 12        |
| 505-00171 | 71-F     | Pre-Buff Cleaner (Flammable) - 1 Qt. Spout Top Can | 6         |
| 532-06020 | 6020     | 16 Oz. Aluminum Cement Dispenser with Brush Top    | 1         |
| 532-06021 | 6021     | Replacement Brush Lid for 6020 Cement Dispenser    | —         |

### REMA TIRE TALC

- Specially formulated for trouble-free tube installation, reduces folding and sticking which contributes to friction within the tire

| ASCOT NO. | MFG. NO. | DESCRIPTION                      | QTY./BOX |
|-----------|----------|----------------------------------|----------|
| 507-00063 | 63       | Rema Tire Talc, 1 Lb. Shaker Top | 10       |



507-00063



### SPECIAL CEMENT BL™

• The key to REMA TIP TOP's exclusive Blue Bonding System, Special Cement BL creates a nearly indestructible bond between tire and repair unit  
• Specifically designed for the application of REMA TIP TOP Radial, Bias-Ply and Universal, Minicombi & RemaStem repair units • Use for chemical installation of REMA TIP TOP blue bonding layer repair units, Blue Floater Gum and chemical vulcanizing compounds • REMA TIP TOP's newest Special Blue Cement (flammable) is free of CFC and aromatic compounds



502-40541

502-51388

CREATES  
ULTRA  
STRONG  
BOND

| ASCOT NO. | MFG. NO. | DESCRIPTION                                          | QTY./<br>BOX |
|-----------|----------|------------------------------------------------------|--------------|
| 502-40541 | BL-8F    | Special Blue Cement (flammable), 8 Oz. Brush Top Can | 12           |
| 502-51388 | BL-32F   | Special Blue Cement (flammable), 32 Oz. Can          | 6            |

### RIM/BEAD SEALER AND INNERLINER REPAIR SEALANT

• REMA TIP TOP offers two distinct Bead Sealer formulations designed to prevent leaks between the tire and rim • Designed to be applied to tire beads during the mounting process • Ideally suited for use with new or old tires • No drip formula is highly viscous with an extended shelf life • CFC-free formula requires shorter drying times • Properly applied, Repair Sealer creates an airtight seal around a finished repair, over buffed areas or porous tire innerliners  
• Prudent use of Repair Sealer maintains the integrity of the repair.vulcanizing uncured rubber • Flammable Version Available: F Series  
• No Drip Version available: ND Series



505-00176

504-09600

PREVENT  
LEAKS  
BETWEEN  
TIRE & RIM

| ASCOT NO. | MFG. NO. | DESCRIPTION                                                        | QTY./<br>BOX |
|-----------|----------|--------------------------------------------------------------------|--------------|
| 504-09600 | 960F     | Rim & Bead Sealer w/Brush Cap. CFC-Free Formula (Flammable) 32 Oz. | 6            |
| 504-09601 | 960ND    | Rim & Bead Sealer w/Brush Cap. No Drip Formula - 32 Oz. Can        | 6            |
| 505-00176 | 76F      | Innerliner Sealer Can (Flammable) - 16 Oz.                         | 6            |

### A&B COMPOUND REPAIR SYSTEM (FLAMMABLE)

• REMA TIP TOP's Vulc Compound has no equal when it comes to cold vulcanization injury filling • Equal quantities of A compound and compound, thoroughly mixed, produce a durable permanent repair



501-50300

501-51300

| ASCOT NO. | MFG. NO. | DESCRIPTION                                                                                                                |
|-----------|----------|----------------------------------------------------------------------------------------------------------------------------|
| 501-50300 | 50F      | <b>A+B VULC COMPOUND KIT:</b> 650g can of A compound; 650g can of B compound; 1 can Special Cement BL (CFC Free), 225g     |
| 501-51300 | 51F      | <b>A+B VULC COMPOUND KIT:</b> 300g can of A compound; 300g can of B compound; 1 can Special Cement BL (CFC Free), 40g each |

### OTR-F CEMENT (FLAMMABLE)

• Specifically designed for the chemical application of REMA TIP TOP Radial (RAD) and Bias Ply (PN) repair units • Optimizes the service performance of long haul earthmover and agricultural tires



| ASCOT NO. | MFG. NO. | DESCRIPTION              |           |
|-----------|----------|--------------------------|-----------|
| 500-00096 | OTR-F    | OTR-F Cement (flammable) | 500-00096 |



Use all tire repair chemicals in a well ventilated area. Avoid prolonged breathing or inhalation of vapors.



## Cements, Sealants & Patches (cont.)

### REMABOND CEMENT (FLAMMABLE)

- For Mold-Cure and Pre-Cure Retreading and Repairing
- Specially formulated to be used in the application of Fill Rubber for buzz-outs, repair patch installation, and tire retreading operations



| ASCOT NO. | MFG. NO.  | DESCRIPTION                                   |
|-----------|-----------|-----------------------------------------------|
| 502-26005 | 16 RBB 5G | Remabond Brush Cement (Flammable) - 5-Gallon  |
| 502-26001 | 16 RBB D  | Remabond Brush Cement (Flammable) - 54-Gallon |
| 502-26015 | 16 RBS 5G | Remabond Spray Cement (Flammable) - 5-Gallon  |
| 502-26011 | 16 RBS D  | Remabond Spray Cement (Flammable) - 54-Gallon |

### REMASOL RUBBER SOLVENT (FLAMMABLE)

- Best for removing contaminants from rubber surfaces and for tire injury repair preparation • Totally compatible with both REMABOND Brush Cement and REMABOND Spray Cement
- Fast drying • Contains no carcinogens • SHELF LIFE: 1 Year from Date of Manufacture in unopened original container



| ASCOT NO. | MFG. NO. | DESCRIPTION                                    |
|-----------|----------|------------------------------------------------|
| 506-26005 | 16 RS 5G | Remasol Rubber Solvent (Flammable) - 5-Gallon  |
| 506-26015 | 16 RS D  | Remasol Rubber Solvent (Flammable) - 54-Gallon |

### REMABOND REPAIR CEMENT (FLAMMABLE)

- REMABOND Repair Cement is made in a convenient 1 gal. size ideal for repair stations

| ASCOT NO. | MFG. NO.  | DESCRIPTION            |
|-----------|-----------|------------------------|
| 500-01602 | 16 RBR 1G | REMABOND Repair Cement |



### MULTIPLE TEMPERATURE RUBBER (MTR) & BLACK CUSHION GUM REPAIR PRODUCTS

- REMA TIP TOP offers a variety of uncured rubber MTR products with excellent green tack and outstanding flow & vulcanization characteristics



| ASCOT NO. | MFG. NO.  | DESCRIPTION                                               |
|-----------|-----------|-----------------------------------------------------------|
| 526-51618 | 5161180   | MTR Cut Resistant Rope Rubber, OTR Repairs, 26.5 Lb. Pail |
| 526-55610 | 5561      | MTR Cushion Gum, 24' x 10" x 0.050", 6 Lbs.               |
| 526-55630 | 5563      | MTR Cushion Gum, 2600mm x 30mm x 3mm, 2 Lbs.              |
| 526-55672 | 5567-26.5 | MTR Rope Rubber, OTR Repairs, 26.5 Lb. Pail               |

### REMA CUSHION GUMS

- SHELF LIFE: 1 Year from Date of Manufacture (\*except Butyl Repair Gum, SHELF LIFE: 6 Months from Date of Manufacture)

525-15213



525-15116

| ASCOT NO. | MFG. NO.     | DESC.             | SIZE (W X THICKNESS) (INCH) | SIZE (W X THICKNESS) (MM) | CURE RATE | WT./ BOX (LBS.) |
|-----------|--------------|-------------------|-----------------------------|---------------------------|-----------|-----------------|
| 525-15116 | 15 1116 S    | Stripping Stock   | 1 x 1/16                    | 25 x 1.50                 | RTT-B     | 35              |
| 525-15216 | 15 2116 S    | Stripping Stock   | 2 x 1/16                    | 50 x 1.50                 | RTT-B     | 35              |
| 525-15213 | 15 2132 CG   | Cushion Gum       | 2 x 1/32                    | 50 x 0.80                 | RTT-B     | 35              |
| 525-15413 | 15 4132 CG   | Cushion Gum       | 4 x 1/32                    | 100 x 0.80                | RTT-B     | 35              |
| 525-15181 | 15 18132 CG  | Cushion Gum       | 18 x 1/32                   | 455 x 0.80                | RTT-B     | 10              |
| 525-15418 | 15 418 CG    | Cushion Gum       | 4 x 1/8                     | 100 x 3.00                | RTT-B     | 35              |
| 525-15188 | 15 1818 CG   | Cushion Gum       | 18 x 1/8                    | 455 x 3.00                | RTT-B     | 20              |
| 525-15186 | 15 18116 UG  | Universal Gum     | 18 x 1/16                   | 455 x 1.50                | RTT-B     | 10              |
| 525-15914 | 15 914 UG    | Universal Gum     | 9 x 1/4                     | 230 x 6.00                | RTT-B     | 40              |
| 525-15286 | 15 18116 BRG | Butyl Repair Gum* | 18 x 1/16                   | 455 x 1.50                | RTT-C     | 10              |
| 525-15288 | 15 1818 FG   | Floater Gum       | 18 x 1/8                    | 455 x 3.00                | RTT-B     | 10              |



## REMA REPAIR CORD

• SHELF LIFE: 1 Year from Date of Manufacture

| ASCOT NO. | MFG. NO.    | DESC.               | SIZE<br>(W X<br>THICKNESS)<br>(INCH) | SIZE<br>(W X<br>THICKNESS)<br>(MM) | CURE<br>RATE | WT./<br>BOX<br>(LBS.) |
|-----------|-------------|---------------------|--------------------------------------|------------------------------------|--------------|-----------------------|
| 526-15293 | 15 NY 29364 | Nylon Tire<br>Cord  | 29 x 3/64                            | 735 x 1.20                         | RTT-D        | 20 lbs                |
| 526-15283 | 15 AR 28364 | Aramid<br>Tire Cord | 28 x 3/64                            | 710 x 1.20                         | RTT-D        | 20 lbs                |

| RTT-A      | RTT-B      | RTT-C      | RTT-D      |
|------------|------------|------------|------------|
| CURE RATES |            |            |            |
| 10' @ 280F | 20' @ 280F | 20' @ 280F | 30' @ 280F |
| 20' @ 260F | 35' @ 260F | 40' @ 260F | 50' @ 260F |

## REMA ROPE RUBBER


• SHELF LIFE (18ER & 18ERS - EXTRUDER ROPE): 4 Months from Date of Manufacture, SHELF LIFE (18OR - OTR ROPE & 18TR - TREAD ROPE): 6 Months from Date of Manufacture



| ASCOT NO. | MFG. NO. | DESC.                 | SIZE<br>(INCH) | CURE<br>RATE | WT./BOX<br>(LBS.) |
|-----------|----------|-----------------------|----------------|--------------|-------------------|
| 526-18001 | 18ER     | Extruder Rope         | 3/8 Diameter   | RTT-A        | 30                |
| 526-18002 | 18ERS    | Extruder Rope / Spool | 3/8 Diameter   | RTT-A        | 30/Spool          |
| 526-18003 | 18TR     | Tread Rope            | 3/8 Diameter   | RTT-B        | 30                |

## REMA PRECURE CUSHION GUM

• Undertread Bonding Gum • Can also be used on splices, skives, and exposed cord  
• Consistent Gauge • Excellent building tack and flow • Custom sizes available upon request (20 box minimum per size/gauge)  
• SHELF LIFE: 4 Months from Date of Manufacture



| ASCOT NO. | MFG. NO.            | DESC.                               | SIZE<br>(W X THICKNESS) |             | CURE<br>RATE | WT./BOX<br>(LBS.) |
|-----------|---------------------|-------------------------------------|-------------------------|-------------|--------------|-------------------|
|           |                     |                                     | (INCH)                  | (MM)        |              |                   |
| 523-18160 | 18 100060 PCC       | Precure Cushion Gum                 | 1 x 0.060               | 25 x 1.524  | RTT-A        | 40                |
| 523-18146 | 18 114060 PCC       | Precure Cushion Gum                 | 1-1/4 x 0.060           | 32 x 1.524  | RTT-A        | 50                |
| 523-18126 | 18 112060 PCC       | Precure Cushion Gum                 | 1-1/2 x 0.060           | 38 x 1.524  | RTT-A        | 35                |
| 523-18206 | 18 200060 PCC       | Precure Cushion Gum                 | 2 x 0.060               | 50 x 1.524  | RTT-A        | 35                |
| 523-18712 | 18 712060 PCC       | Precure Cushion Gum                 | 7-1/2 x 0.060           | 190 x 1.524 | RTT-A        | 30                |
| 523-18758 | 18 758060 PCC       | Precure Cushion Gum                 | 7-5/8 x 0.060           | 195 x 1.524 | RTT-A        | 30                |
| 523-18860 | 18 800060 PCC       | Precure Cushion Gum                 | 8 x 0.060               | 203 x 1.524 | RTT-A        | 35                |
| 523-18858 | 18 858060 PCC       | Precure Cushion Gum                 | 8-5/8 x 0.060           | 220 x 1.524 | RTT-A        | 35                |
| 523-18960 | 18 900060 PCC       | Precure Cushion Gum                 | 9 x 0.060               | 230 x 1.524 | RTT-A        | 35                |
| 523-18914 | 18 914060 PCC       | Precure Cushion Gum                 | 9-1/4 x 0.060           | 235 x 1.524 | RTT-A        | 40                |
| 523-18912 | 18 912060 PCC       | Precure Cushion Gum                 | 9-1/2 x 0.060           | 240 x 1.524 | RTT-A        | 40                |
| 523-18915 | 18 914 045 PCC      | Precure Cushion Gum                 | 9-1/4 x 0.045           | 235 x 1.143 | RTT-A        | 35                |
| 523-18856 | 18 858 046 PCC      | Precure Cushion Gum                 | 8-5/8 x 0.045           | 220 x 1.143 | RTT-A        | 30                |
| 523-18389 | 18 38916055 PCC     | Precure Cushion Gum                 | 38-9/16 x 0.055         | 980 x 1.397 | RTT-A        | 52                |
| 523-18212 | 18 02120 OTR PCC DP | OTR Precure Cushion Gum Double Poly | 2 x 0.120               | 50 x 3.048  | RTT-A        | 40                |
| 523-18512 | 18 05120 OTR PCC DP | OTR Precure Cushion Gum Double Poly | 5 x 0.120               | 125 x 3.048 | RTT-A        | 40                |
| 523-18101 | 18 10120 OTR PCC DP | OTR Precure Cushion Gum Double Poly | 10 x 0.120              | 254 x 3.048 | RTT-A        | 35                |
| 523-18220 | 18 12120 OTR PCC DP | OTR Precure Cushion Gum Double Poly | 12 x 0.120              | 305 x 3.048 | RTT-A        | 45                |
| 523-18412 | 18 14120 OTR PCC DP | OTR Precure Cushion Gum Double Poly | 14 x 0.120              | 355 x 3.048 | RTT-A        | 50                |
| 523-18161 | 18 16120 OTR PCC DP | OTR Precure Cushion Gum Double Poly | 16 x 0.120              | 405 x 3.048 | RTT-A        | 60                |
| 523-18222 | 18 22120 OTR PCC DP | OTR Precure Cushion Gum Double Poly | 22 x 0.120              | 560 x 3.048 | RTT-A        | 80                |
| 523-18262 | 18 26120 OTR PCC DP | OTR Precure Cushion Gum Double Poly | 26 x 0.120              | 660 x 3.048 | RTT-A        | 95                |
| 525-15288 | 15 1818 FG          | Floater Gum                         | 18 x 1/8                | 455 x 3.00  | RTT-B        | 10                |

## Cements, Sealants & Patches (cont.)

### TIRE REPAIR CHEMICALS

- Fast drying
- Wide brush for easy application

| ASCOT NO. | MFG. NO. | DESCRIPTION                                            |
|-----------|----------|--------------------------------------------------------|
| 501-90018 | ASV8     | Clear Chemical Vulcanizing Cement, 8 oz. (24 per case) |
| 501-90032 | ASV32    | Clear Chemical Vulcanizing Cement, Quart (6 per case)  |
| 501-90008 | ASV8BL   | Blue Chemical Vulcanizing Cement, 8 oz. (24 per case)  |
| 501-90132 | ASV32BL  | Blue Chemical Vulcanizing Cement, Quart (6 per case)   |
| 504-90011 | ABSG     | Black Bead Sealer, Gallon (4 per case)                 |
| 504-90032 | ABS32    | Black Bead Sealer, Quart (6 per case)                  |
| 504-90005 | ABS5G    | Black Bead Sealer, 5-Gallon                            |
| 504-90016 | ARS16BK  | Black Inner Liner Sealer, 16 oz. (12 per case)         |
| 505-90032 | ABU32    | Inner Liner Cleaner, Quart (12 per case)               |

504-90005  
Black Bead Sealer, 5-Gallon



504-90011  
Black Bead Sealer,  
Gallon



504-90032  
Black Bead Sealer,  
Quart



504-90016  
Black Inner Liner Sealer,  
16 oz.



501-90032  
Clear Chemical Vulcanizing  
Cement, Quart

501-90018  
Clear Chemical Vulcanizing  
Cement, 8 oz.



501-90132  
Blue Chemical Vulcanizing  
Cement, Quart



501-90008  
Blue Chemical Vulcanizing  
Cement, 8 oz.



## LEAD WIRE PULL THROUGH PATCH/PLUG

- Easiest and most popular method to fill a nailhole and apply a patch in one simple step
- Lead-wire guides the rubber stem through injury
- Stem coated with self vulcanizing material and patch features Versacure bonding gum
- For tread area of bias and radial passenger and truck tires



587-01309



FOR TREAD AREA



587-01406

| ASCOT NO. | DESCRIPTION                                    | QTY./BOX |
|-----------|------------------------------------------------|----------|
| 587-01303 | 1/8" Stem Lead Wire Pull Through Patch/Plug    | 48       |
| 587-01306 | 1/4" Stem Lead Wire Pull Through Patch/Plug    | 24       |
| 587-01309 | 3/8" Stem Lead Wire Pull Through Patch/Plug    | 24       |
| 587-01406 | 1/4" Plug-N-Patch: Grey Cushion Gum, Blue Wrap | 24       |
| 587-01409 | 3/8" Plug-N-Patch: Grey Cushion Gum, Blue Wrap | 24       |

## PUSH THROUGH PATCH/PLUG

- One-piece molded rubber patch/plug unit with a metal quill that protects the stem from damage during insertion
- For tread area of bias and radial passenger and truck tires



FOR TREAD AREA



PROTECTS STEM FROM DAMAGE



587-01150

| ASCOT NO. | MFG. NO.                                | QTY./BOX |
|-----------|-----------------------------------------|----------|
| 587-01151 | 1/4" (6mm) Stem Push Through Patch/Plug | 24       |
| 587-01152 | 1/4" (6mm) Stem Push Through Patch/Plug | 48       |
| 587-01150 | 1/8" (3mm) Stem Push Through Patch/Plug | 48       |

## PATCH PLUGS

- Quill and lead wire types
- Repair using chemical vulcanizing cement



587-90003



QUILL &amp; LEAD WIRE TYPES



587-90016



587-90066

| ASCOT NO. | MFG. NO. | DESCRIPTION                                                                            | QTY./BOX |
|-----------|----------|----------------------------------------------------------------------------------------|----------|
| 587-90003 | AQ3      | Quill Type Combination Repair: 3/16"                                                   | 24       |
| 587-90016 | A3W      | Wrapped Stem Lead Wire Combination Repair: 3mm Stem, 2" Cap                            | —        |
| 587-90018 | A6W      | Wrapped Stem Lead Wire Combination Repair: 6mm Stem, 2" Cap                            | —        |
| 587-90033 | A3D      | Lead Wire Dipped Stem Combination Repair: 2" Repair Size, 1/8" Dia. Stem, 1/8" Injury  | 24       |
| 587-90066 | A6D      | Lead Wire Dipped Stem Combination Repair: 2" Repair Size, 5/16" Dia. Stem, 1/4" Injury | 24       |
| 587-90088 | A8D      | Lead Wire Dipped Stem Combination Repair: 2" Repair Size, 3/8" Dia. Stem, 5/16" Injury | 24       |
| 587-90099 | A9D      | Lead Wire Dipped Stem Combination Repair: 2" Repair Size, 1/2" Dia. Stem, 3/8" Injury  | 24       |
| 587-90110 | A8W      | Wrapped Stem Lead Wire Combination Repair: 9mm Stem, 2" Cap                            | —        |

## Cements, Sealants & Patches (cont.)

### STANDARD TUBE & TUBELESS TIRE REPAIRS

- Feather edge, soft gum repairs • For use with all types of tubes • Repair using chemical vulcanizing cement



541-90020



541-90030



541-90040

| ASCOT NO. | MFG. NO.    | DESC.        | WIDTH   | QTY./BOX |
|-----------|-------------|--------------|---------|----------|
| 541-90020 | ARB20       | Large Round  | 3-1/8"  | 20       |
| 541-90030 | ARB30       | Medium Round | 2-1/8"  | 30       |
| 541-90040 | ARB40       | Small Round  | 1-9/16" | 40       |
| 541-90101 | ARB100-1000 | Small Round  | 1-9/16" | 1000     |
| 541-90255 | ARB25-500   | Large Round  | 3-1/8"  | 500      |
| 541-90610 | ARB60-1000  | Medium Round | 2-1/8"  | 1000     |

### UNIVERSAL/RADIAL BIAS REPAIRS

- For use on private passenger and light truck tires up to 1/4" injuries
- Rubber reinforced soft gum • Repair using chemical vulcanizing cement

FOR UP  
TO 1/4"  
INJURIES



541-90000



541-90005



541-90004



541-90017



541-90001



541-90011

| ASCOT NO. | MFG. NO.  | DESCRIPTION                            | WIDTH   | QTY./BOX |
|-----------|-----------|----------------------------------------|---------|----------|
| 550-90000 | AWR0      | Small Round                            | 1-9/16" | 35       |
| 550-90001 | ASQ1      | Small Square (Grey Gum/Red Plastic)    | 1-3/4"  | 40       |
| 550-90002 | ASQ2      | Medium Square (Grey Gum/Red Plastic)   | 2-1/8"  | 40       |
| 550-90004 | AWR4      | Medium Round                           | 2-1/8"  | 30       |
| 550-90005 | AWR5      | Large Round                            | 3-1/8"  | 18       |
| 550-90006 | AWR6      | Giant Round                            | 4-1/8"  | 10       |
| 550-90007 | AWR7      | Small Square (Black Gum/Blue Plastic)  | 1-3/4"  | 35       |
| 550-90008 | AWR8      | Medium Square                          | 2-1/4"  | 25       |
| 550-90009 | AWR9      | Large Square                           | 2-3/4"  | 15       |
| 550-90011 | ASQ1T     | Small Square (Grey Gum/Red Plastic)    | 1-3/4"  | 100      |
| 550-90012 | ASQ2T     | Medium Square (Grey Gum/Red Plastic)   | 2-1/8"  | 80       |
| 550-90014 | AWR4T     | Medium Round                           | 2-1/8"  | 100      |
| 550-90015 | AWR5T     | Large Round                            | 3-1/8"  | 50       |
| 550-90017 | AWR7T     | Small Square (Black Gum/Blue Plastic)  | 1-3/4"  | 100      |
| 550-90018 | AWR8T     | Medium Square (Black Gum/Blue Plastic) | 2-1/4"  | 50       |
| 550-90019 | AWR9T     | Large Square (Black Gum/Blue Plastic)  | 2-3/4"  | 50       |
| 550-90031 | ASQ3T     | Large Square (Grey Gum/Red Plastic)    | 2-1/4"  | 50       |
| 550-90114 | AWR4-1000 | Medium Round                           | 2-1/8"  | 1000     |
| 550-90200 | AWR0T     | Small Round                            | 1-9/16" | 200      |
| 550-90550 | AWR5-500  | Large Round                            | 3-1/8"  | 500      |
| 550-91000 | AWR0-1000 | Small Round                            | 1-9/16" | 1000     |
| 550-91100 | ASQ1-1000 | Small Square (Grey Gum/Red Plastic)    | 1-3/4"  | 1000     |
| 550-92100 | ASQ2-1000 | Medium Square (Grey Gum/Red Plastic)   | 2-1/8"  | 1000     |



## EURO UNIVERSAL RADIAL REPAIR


• For bias and radial repairs blue hard gum • Repair using chemical vulcanizing cement

| ASCOT NO. | MFG. NO.  | DESCRIPTION              | SIZE   | QTY./BOX |
|-----------|-----------|--------------------------|--------|----------|
| 571-92100 | ARR02-500 | Rubber Reinforced: Round | 2 1/4" | 500      |

## BIAS HEAVY DUTY UNITS

• ASB series is a cord reinforced soft gum repair • ACB series is a cord reinforced repair with hard blue gum • Repair with chemical vulcanizing cement

564-90111



| ASCOT NO. | MFG. NO. | DESCRIPTION     | SIZE            | QTY./BOX |
|-----------|----------|-----------------|-----------------|----------|
| 564-90012 | ASB2     | Bias Heavy Duty | 2-7/8"          | 20       |
| 564-90013 | ASB3     | Bias Heavy Duty | 4-5/8"          | 10       |
| 564-90014 | ASB4     | Bias Heavy Duty | 5-1/2" x 7-1/4" | 10       |
| 564-90015 | ASB5     | Bias Heavy Duty | 7-1/8"          | 10       |
| 564-90016 | ASB6     | Bias Heavy Duty | 10"             | 10       |
| 564-90022 | ACB2HD   | Bias Heavy Duty | 2-7/8"          | 20       |
| 564-90111 | ACB1HD   | Bias Heavy Duty | 2-1/2"          | 20       |

## RADIAL HEAVY DUTY TRUCK UNITS

• ACX series is a cord reinforced hard blue gum repair (For radial repairs only) • ASX series is a cord reinforced soft gum repair (For radial tires only)

576-90110



576-90010

| ASCOT NO. | MFG. NO.  | DESCRIPTION       | SIZE             | QTY./BOX |
|-----------|-----------|-------------------|------------------|----------|
| 576-90010 | ACX10     | Radial Heavy Duty | 2-1/8" x 3"      | 20       |
| 576-90012 | ACX12     | Radial Heavy Duty | 2-3/4" x 4-1/2"  | 10       |
| 576-90014 | ACX14     | Radial Heavy Duty | 3-3/8" x 5-1/8"  | 10       |
| 576-90020 | ACX20     | Radial Heavy Duty | 3-1/8" x 4-7/8"  | 10       |
| 576-90040 | ACX40     | Radial Heavy Duty | 3-7/8" x 7-5/8"  | 10       |
| 576-90110 | ASX10     | Radial Heavy Duty | 2-1/8" x 3"      | 20       |
| 576-90111 | ASX10-300 | Radial Heavy Duty | 2-1/8" x 3"      | 300      |
| 576-90112 | ASX12     | Radial Heavy Duty | 2-3/4" x 4-1/2"  | 10       |
| 576-90114 | ASX14     | Radial Heavy Duty | 3-3/8" x 5-1/8"  | 10       |
| 576-90120 | ASX20     | Radial Heavy Duty | 3-1/8" x 4-7/8"  | 10       |
| 576-90140 | ASX40     | Radial Heavy Duty | 3-7/8" x 7-5/8"  | 10       |
| 576-90142 | ASX42     | Radial Heavy Duty | 5-1/8" x 10-1/4" | 5        |

## AGRICULTURAL BOOTS

• Designed for tube type repairs in agriculture and construction • Made with a blend of rubber and cord for strength with a non-chafing surface • Repair using chemical vulcanizing cement



593-90011

593-90001

| ASCOT NO. | MFG. NO. | DESCRIPTION             | SIZE            | QTY./BOX |
|-----------|----------|-------------------------|-----------------|----------|
| 593-90001 | A1L      | Oval Agricultural Boot  | 3" x 4"         | 20       |
| 593-90002 | A2L      | Oval Agricultural Boot  | 4" x 6"         | 10       |
| 593-90003 | A3L      | Oval Agricultural Boot  | 5-1/2" x 7-1/4" | 10       |
| 593-90004 | A4L      | Oval Agricultural Boot  | 7" x 9-3/4"     | 10       |
| 593-90011 | A1R      | Round Agricultural Boot | 3-3/4"          | 20       |
| 593-90022 | A2R      | Round Agricultural Boot | 4-1/2"          | 10       |

## STRAND TIRE REPAIR

• Excellent emergency repair when a full service repair facility is unavailable • Produced using butyl rubber and 100% saturated cord • Excellent for golf carts, lawn



571-90410

571-90705

GREAT FOR  
EMERGENCY  
REPAIR

| ASCOT NO. | MFG. NO. | DESCRIPTION                                           |
|-----------|----------|-------------------------------------------------------|
| 571-90410 | VRI410   | 4" Orange, 12 Strand Tire Repair (10 Packets per Box) |
| 571-90705 | VRI705   | 7" Black, 5 Strand Tire Repair (10 Packets per Box)   |

## Cements, Sealants &amp; Patches (cont.)

## HEAVY DUTY 4" AUTOMOTIVE REPAIR INSERT KIT

• For use on the wheel • Everything needed to make temporary, emergency repairs to most flat tires caused by nails or other objects up to 1/4" • 518-90130 KIT INCLUDES: (30) 4" temporary inserts, metal t-handle insertion tool, metal t-handle probe, lubricant, cutting blade, Allen wrench and instructions • 518-90160 KIT INCLUDES: (60) 4" temporary inserts, metal t-handle insertion tool, metal t-handle probe, lubricant, cutting blade, Allen wrench and instructions • Blow molded case for easy storage



518-90130

**ASCOT**  
SUPPLY CORPORATION

FOR  
EASY,  
TEMPORARY  
REPAIRS



518-90160

| ASCOT NO. | MFG. NO.  | DESCRIPTION                                             |
|-----------|-----------|---------------------------------------------------------|
| 518-90130 | ATR30K-HD | Heavy Duty 4" Automotive Repair Insert Kit - 30 Repairs |
| 518-90160 | ATR60K-HD | Heavy Duty 4" Automotive Repair Insert Kit - 60 Repairs |

## HEAVY DUTY 8" AUTOMOTIVE REPAIR INSERT KIT

• For use on the wheel  
• Everything needed to make temporary, emergency repairs to most flat tires caused by nails or other objects up to 1/4" • KIT INCLUDES: (30) 8" temporary inserts, metal t-handle insertion tool, metal t-handle probe, lubricant, cutting blade, Allen wrench and instructions • Blow molded case for easy storage

518-90030



| ASCOT NO. | MFG. NO.  | DESCRIPTION                                             |
|-----------|-----------|---------------------------------------------------------|
| 518-90030 | ATS30K-HD | Heavy Duty 8" Automotive Repair Insert Kit - 30 Repairs |

## BROWN, 12 STRAND TIRE REPAIR INSERT W/ BLUE PAPER BACKING

• 8" brown • Made in the USA  
• Extended shelf life • No leaks • 3rd party testing • EPA approved • Durable cord body  
• 100% butyl saturation • 6 repairs per packet • 5 packets per box



571-91964



571-91968

| ASCOT NO. | MFG. NO. | DESCRIPTION                                                  |
|-----------|----------|--------------------------------------------------------------|
| 571-91964 | ATS1964  | 4" Brown, 12 Strand Tire Repair Insert w/ Blue Paper Backing |
| 571-91968 | ATS1968  | 8" Brown, 12 Strand Tire Repair Insert w/ Blue Paper Backing |



Ascot Supply Corp. does not recommend "temporary" tire repairs. All repairs should perform the function of filling or replacing the injured section as recommended by the RMA and other industry associations.



## SAFETY SEAL® AUTO/LIGHT TRUCK TIRE REPAIR REFILLS

- 24 plies of a custom made high tensile (350 lb break strength) chemical resistant nylon yarn • Each yarn is immersed in proprietary rubber sealant system (250% rubber to yarn)
- Patented manufacturing process assures the final Safety Seal® repair has an equal amount of rubber sealant (250% rubber to yarn) through-out the Safety Seal® Repair
- INCLUDES: 60 4" (10cm) refill repairs per kit



585-60410

| ASCOT NO. | MFG. NO. | DESCRIPTION                                                  |
|-----------|----------|--------------------------------------------------------------|
| 585-60410 | SSRA     | Auto Light/Truck Tire Repair Refills - 60 4" (10 cm) Repairs |

## SAFETY SEAL® TRUCK TIRE REPAIR REFILLS

- 24 plies of a custom made high tensile (350 lb break strength) chemical resistant nylon yarn
- Each yarn is immersed in proprietary rubber sealant system (250% rubber to yarn)
- Patented manufacturing process assures the final Safety Seal® repair has an equal amount of rubber sealant (250% rubber to yarn) through-out the Safety Seal® Repair
- INCLUDES: 30 8" (20cm) refill repairs per kit



585-30820

| ASCOT NO. | MFG. NO. | DESCRIPTION                                       |
|-----------|----------|---------------------------------------------------|
| 585-30820 | SSRT     | Truck Tire Repair Refills - 30 8" (20 cm) Repairs |

## VULCANIZED TUBELESS TIRE REPAIR SEALS

- For emergency repair use only • String repairs are not designed to be used in lieu of a permanent repair • Repair a punctured tire in a matter of minutes • Made from high-strength yarn and butyl rubber



585-30581



585-60541

| ASCOT NO. | MFG. NO.     | DESCRIPTION                 | QTY./BOX |
|-----------|--------------|-----------------------------|----------|
| 538-60541 | 1012060T54TS | 4" Orange String Repair     | 60       |
| 585-30581 | 1012030T58TS | 8" Orange String Repair     | 30       |
| 585-10071 | 105B100PD7AS | 8" Thin Black String Repair | 100      |



Ascot Supply Corp. does not recommend "temporary" tire repairs. All repairs should perform the function of filling or replacing the injured section as recommended by the RMA and other industry associations.

## ATV "ON THE WHEEL TIRE REPAIR KIT"

- Designed for outdoor enthusiasts to repair, inflate and go! • KIT INCLUDES: (1) Needle insertion tool; (6) Self-vulcanizing repairs, (1) CO2 inflator w/ two cartridges; and Instructions • Packed in a water tight display tube package that hang on a peg hook • Can repair all tubeless tires with NO cement needed



The ATV "On The Wheel Tire Repair Kit" Gauge in use.

| ASCOT NO. | MFG. NO. | DESCRIPTION                              |
|-----------|----------|------------------------------------------|
| 571-22928 | SSKATVTI | ATV "On The Wheel Truck Tire Repair Kit" |

## SAFETY SEAL® TRUCK TIRE REPAIR KIT

- Includes everything to make temporary repairs to most flats caused by nails or other objects up to 1/4" • KIT INCLUDES: 30-8" (20cm) temporary repairs, Metal T-handle insertion tool, Metal T-handle spiral probe, Special lube, Extra insertion needle, Cutting blades, Allen wrench, and Instructions
- Packed in a sturdy carrying case to fit easily under the seat of a truck



571-22926

| ASCOT NO. | MFG. NO. | DESCRIPTION           |
|-----------|----------|-----------------------|
| 571-22926 | SSKTP    | Truck Tire Repair Kit |

## SAFETY SEAL® DELUXE TIRE REPAIR KIT

- For autos and light trucks • "On the Wheel" design for the professional who wants to fix a flat quickly and easily
- Repairs punctures up to 1/4" and seals entire puncture from tread to inner liner
- Also available in other sizes: truck, off-road and heavy equipment



571-22960

| ASCOT NO. | MFG. NO. | DESCRIPTION            |
|-----------|----------|------------------------|
| 571-22960 | SSKAP    | Deluxe Tire Repair Kit |



## Cements, Sealants & Patches (cont.)

### EURO-STYLE UNIVERSAL REPAIR UNITS

• Rubber reinforced repairs that can be applied in any repairable area of a radial or bias-ply passenger tire • Repairs a maximum injury of 1/4" when following industry recommended repair procedures • Vulcanizes either chemically or with heat



| ASCOT NO. | MFG. NO. | DESCRIPTION     | SIZE (IN.) | SIZE (MM) | QTY./BOX |
|-----------|----------|-----------------|------------|-----------|----------|
| 571-11307 | 11-307   | Mini Square     | 1-1/2      | 38        | 50       |
| 571-11309 | 11-309   | Small Square    | 1-7/8      | 48        | 50       |
| 571-11311 | 11-311   | Medium Square   | 2-1/4      | 57        | 50       |
| 571-11312 | 11-312   | Large Square    | 2-1/2      | 66        | 50       |
| 571-11313 | 11-313   | Small Rectangle | 1-3/4 x 3  | 45 x 75   | 10       |

### FEATHER-EDGE TUBE REPAIRS

- Designed for repairing inner tubes (chemical vulcanization only)
- Twice as strong as tube being repaired, yet, extremely flexible



| ASCOT NO. | MFG. NO. | DESCRIPTION  | SIZE (IN.)    | SIZE (MM) | QTY./BOX |
|-----------|----------|--------------|---------------|-----------|----------|
| 541-11000 | 11-000   | Mini Round   | 1-1/4         | 32        | 100      |
| 541-11001 | 11-001   | Small Round  | 1-5/8         | 43        | 40       |
| 541-11002 | 11-002   | Medium Round | 2-1/4         | 57        | 30       |
| 541-11003 | 11-003   | Large Round  | 3-1/4         | 82        | 20       |
| 541-11004 | 11-004   | Small Oval   | 1-3/8 x 2-3/8 | 35 x 60   | 30       |
| 541-11005 | 11-005   | Medium Oval  | 1-3/4 x 3-3/4 | 45 x 97   | 20       |
| 541-11006 | 11-006   | Large Oval   | 2-1/2 x 5-5/8 | 65 x 144  | 20       |
| 541-11007 | 11-007   | Giant Round  | 5             | 125       | 10       |
| 541-11008 | 11-008   | Giant Oval   | 3-3/4 x 6-1/8 | 95 x 155  | 10       |

### USA STYLE UNIVERSAL REPAIR UNITS


- For nail hole repairs in radial or bias-ply passenger tires • Chemical vulcanization only • Black vulcanizing gum, blue poly backing



| ASCOT NO. | MFG. NO. | DESCRIPTION   | SIZE (IN.)    | SIZE (MM) | QTY./BOX |
|-----------|----------|---------------|---------------|-----------|----------|
| 571-11115 | 11-115   | Small Square  | 1-7/8         | 47        | 30       |
| 571-11116 | 11-116   | Medium Square | 2-1/8         | 54        | 30       |
| 571-11321 | 11-321   | Small Round   | 1-5/8         | 41        | 30       |
| 571-11322 | 11-322   | Medium Round  | 2-1/4         | 57        | 25       |
| 571-11323 | 11-323   | Large Round   | 3-1/4         | 82        | 15       |
| 571-11324 | 11-324   | Small Oval    | 1-3/8 x 2-3/8 | 37 x 61   | 25       |
| 571-11325 | 11-325   | Medium Oval   | 1-7/8 x 3-7/8 | 48 x 98   | 15       |

### UNIVERSAL QUILLED COMBINATION UNITS

- Feature rubber reinforced patch heads • Multi-directional and can be used in any repairable area of radial or bias-ply tires • Black repair unit with black vulcanizing gum • Both stem and repair unit will vulcanize chemically • Stem of combination unit is equipped with a metal quill

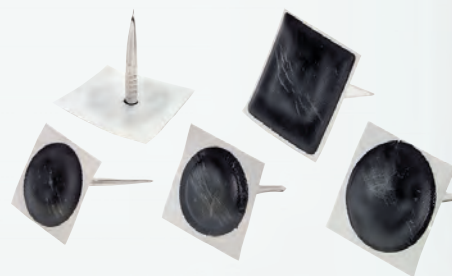

| ASCOT NO. | MFG. NO. | PATCH SIZE                  | STEM SIZE                 | QTY./BOX |
|-----------|----------|-----------------------------|---------------------------|----------|
| 587-13381 | 13-381   | Round, 1-5/8" Round, 42mm   | Round, 5/32" Round, 4mm   | 20       |
| 587-13382 | 13-382   | Round, 2-1/8" Round, 55mm   | Round, 5/16" Round, 8mm   | 15       |
| 587-13386 | 13-386   | Square, 2-3/8" Square, 60mm | Flat, 7/16" Flat, 11mm    | 10       |
| 587-33810 | 13-381SQ | Square, 1-5/8" Square, 42mm | Round, 5/32" Round, 4mm   | 20       |
| 587-33811 | 13-382SQ | Square, 2-3/8" Square, 60mm | Round, 5/16" Round, 7.5mm | 15       |

## DIPPED LEAD-WIRE INSERTS

• Designed to fill the injury in passenger and truck, radial or bias-ply tires • Will vulcanize chemically or in the presence of a heat curing system, becoming a permanent part of the tire • Requires no special insert tool for installation



| ASCOT NO. | MFG. NO. | DESCRIPTION                  | QTY./BOX |
|-----------|----------|------------------------------|----------|
| 581-13620 | 13-620   | 1/4" Dipped Lead Wire Insert | 20       |
| 581-13621 | 13-621   | 3/16" Lead Wire Insert       | 20       |
| 581-13622 | 13-622   | 3/8" Lead Wire Insert        | 20       |
| 581-13623 | 13-623   | 13/32" Lead Wire Insert      | 20       |

## "BN" BIAS-PLY REPAIR

• Designed to be applied in any repairable area of tube or tubeless bias-ply tire • Designed for use in puncture, reinforcing or section repairs • Will vulcanize chemically or in high heating curing systems • Repairs are a unit molded style with premium blue vulcanizing gum on white Mylar backing • Fine feather-edge eliminates chaffing



| ASCOT NO. | MFG. NO. | DESCRIPTION | SIZE (IN.) | SIZE (MM) | QTY./BOX |
|-----------|----------|-------------|------------|-----------|----------|
| 561-11488 | 11-488   | BN1, 1-Ply  | 2-1/8"     | 55        | 30       |
| 561-11489 | 11-489   | BN2, 2-Ply  | 3"         | 75        | 20       |
| 561-11490 | 11-490   | BN3, 2-Ply  | 3-1/2"     | 89        | 20       |
| 561-11491 | 11-491   | BN4, 2-Ply  | 4-1/4"     | 110       | 10       |
| 561-11492 | 11-492   | BN5, 2-Ply  | 5-1/4"     | 135       | 10       |
| 561-11493 | 11-493   | BN7, 3-Ply  | 6.5"       | 165       | 10       |
| 561-11494 | 11-494   | BN8, 3-Ply  | 7-1/2"     | 190       | 10       |
| 561-11495 | 11-495   | BN9, 4-Ply  | 8-5/8"     | 220       | 10       |
| 561-11496 | 11-496   | BN10, 6-Ply | 9-7/8"     | 250       | 5        |
| 561-11497 | 11-497   | BN12, 6-Ply | 12"        | 305       | 5        |
| 561-11498 | 11-498   | BN15, 8-Ply | 15"        | 380       | 3        |
| 561-11499 | 11-499   | BN20, 8-Ply | 20"        | 508       | 3        |

## USA STYLE C-O-I RADIAL REPAIR

• Designed for use in puncture, reinforcement or section repairs in any repairable area of passenger, truck, agricultural or earthmover radial tires • Repair is black with gray vulcanizing gum on a blue poly backing • Each reinforced ply is individually end-wrapped to deflect tire flexing stresses in a unique manner • New tie-gum construction eliminates the potential for delamination common in competitive brands • Will vulcanize chemically or in low temperature (precure) systems



| ASCOT NO. | MFG. NO. | DESC.            | SIZE (IN.)      | SIZE (MM) | QTY./BOX |
|-----------|----------|------------------|-----------------|-----------|----------|
| 571-11808 | 11-808   | Radial 10, 1-Ply | 1-5/8" x 3"     | 42 x 75   | 20       |
| 571-11810 | 11-810   | Radial 10, 1-Ply | 2-3/8" x 3"     | 60 x 75   | 20       |
| 571-11812 | 11-812   | Radial 12, 1-Ply | 2-1/4" x 4"     | 57 x 100  | 10       |
| 571-11814 | 11-814   | Radial 14, 1-Ply | 3-3/4" x 4"     | 95 x 100  | 10       |
| 571-11820 | 11-820   | Radial 20, 2-Ply | 2-7/8" x 5"     | 72 x 125  | 10       |
| 571-11822 | 11-822   | Radial 22, 2-Ply | 3" x 6"         | 75 x 150  | 10       |
| 571-11824 | 11-824   | Radial 24, 2-Ply | 3" x 8-1/2"     | 75 x 215  | 10       |
| 571-11825 | 11-825   | Radial 25, 3-Ply | 4-1/2" x 5"     | 115 x 125 | 10       |
| 571-11835 | 11-835   | Radial 35, 3-Ply | 5-1/4" x 7"     | 133 x 180 | 10       |
| 571-11840 | 11-840   | Radial 40, 3-Ply | 4" x 7-3/8"     | 100 x 188 | 10       |
| 571-11842 | 11-842   | Radial 42, 4-Ply | 5" x 10"        | 125 x 254 | 10       |
| 571-11844 | 11-844   | Radial 44, 4-Ply | 5" x 13"        | 125 x 330 | 10       |
| 571-11845 | 11-845   | Radial 45, 4-Ply | 7-1/2" x 9-1/2" | 190 x 240 | 5        |



## Cements, Sealants & Patches (cont.)

### DIPPED LEAD-WIRE COMBINATION UNITS


- Requires no special wire pulling tools, just insert lead wire into the injury from the inside of the tire and pull the repair unit through from the outside • Stem and repair unit are gum-coated to provide the most complete bond, both inside the injury and on the innerliner
- Will vulcanize chemically or in a heat cure system • Stem portion is dip coated, Patch has gray vulcanizing gum and blue poly backing



| ASCOT NO. | MFG. NO. | PATCH SIZE    | STEM DIAMETER | QTY./BOX |
|-----------|----------|---------------|---------------|----------|
| 583-13670 | 13-670   | 1" (27mm)     | 1/8" (3.8mm)  | 20       |
| 583-13672 | 13-672   | 1-5/8" (42mm) | 3/16" (5mm)   | 24       |
| 583-13673 | 13-673   | 2-1/8" (55mm) | 1/4" (6mm)    | 24       |
| 583-13674 | 13-674   | 2-1/8" (55mm) | 3/8" (8.5mm)  | 24       |

### GRAY GUM LEAD-WIRE COMBINATION UNITS

- Specially formulated gray gum coating over the stem

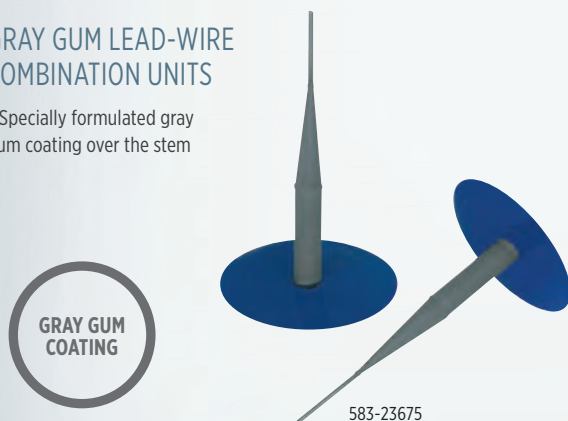

| ASCOT NO. | MFG. NO. | PATCH SIZE    | STEM DIAMETER | QTY./BOX |
|-----------|----------|---------------|---------------|----------|
| 583-23672 | 13-672G  | 1-5/8" (42mm) | 3/16" (4.5mm) | 24       |
| 583-23673 | 13-673G  | 2-1/8" (55mm) | 1/4" (6mm)    | 24       |
| 583-23674 | 13-674G  | 2-1/8" (55mm) | 5/16" (8mm)   | 24       |
| 583-23675 | 13-675G  | 2-1/8" (55mm) | 3/8" (10mm)   | 16       |

### BUFFING SOLUTION



505-14100

505-14102

| ASCOT NO. | MFG. NO. | DESCRIPTION      | TYPE          | SIZE   |
|-----------|----------|------------------|---------------|--------|
| 505-14100 | 14-100   | Buffing Solution | Flammable     | 32 oz. |
| 505-14102 | 14-102   | Aerosol Buff     | Non-Flammable | 16 oz. |

### SEALERS



504-14111

504-14228

| ASCOT NO. | MFG. NO. | DESCRIPTION              | TYPE      | SIZE   |
|-----------|----------|--------------------------|-----------|--------|
| 504-14100 | 14-101   | Bead Sealer              | Flammable | 1 Gal. |
| 504-14104 | 14-104   | Bead Sealer              | Flammable | 5 Gal. |
| 504-14111 | 14-101A  | Bead Sealer - Heavy Duty | Flammable | 32 Oz. |
| 504-14228 | 14-128A  | Inner Liner Sealer       | Flammable | 16 Oz. |

### CHEMICAL VULCANIZING CEMENT

- Offering both flammable and non-flammable cements • Flammable cements tend to dry faster • In certain regions, non-flammable cements required by law or regulation • Contains accelerators which, when coming into contact with the face gum on any "X-tra Seal™" repair unit, will begin the vulcanization process



501-14008

501-14515

501-14511

| ASCOT NO. | MFG. NO. | DESCRIPTION        | TYPE       | SIZE   |
|-----------|----------|--------------------|------------|--------|
| 501-14008 | 14-008   | Vulcanizing Cement | Flammable  | 8 oz.  |
| 501-14032 | 14-032   | Vulcanizing Cement | Flammable  | 32 oz. |
| 501-14511 | 14-511   | HD Supr-Blu Cement | Flammable  | 8 oz.  |
| 501-14512 | 14-512   | HD Supr-Blu Cement | Flammable  | 32 oz. |
| 501-14513 | 14-513   | Vulcanizing Cement | Non-Flamm. | 8 oz.  |
| 501-14514 | 14-514   | Vulcanizing Cement | Non-Flamm. | 32 oz. |
| 501-14515 | 14-515   | Black Vulc. Cement | Flammable  | 32 oz. |

# Air Buffers & Drills

## HIGH-SPEED TIRE BUFFER WITH QUICK CHANGE CHUCK

- Equipped with a quick change chuck to allow for rapid changes to a variety of tire repair tasks • APPLICATIONS: Ideal for scuffing, grinding, cleaning and many other uses requiring high speed and is equipped with safety throttle lever • Includes one quick-change adapter • FREE SPEED: 20,000 RPM • MADE IN USA



| ASCOT NO. | MFG. NO.    | DESCRIPTION                                    |
|-----------|-------------|------------------------------------------------|
| 157-06010 | SLP-6010    | High-Speed Tire Buffer with Quick Change Chuck |
| 157-16010 | SLP-6010REK | Above with Rear Exhaust Hose Kit               |

## HIGH SPEED TIRE BUFFER KIT

- Jacobs chuck for holding buffing accessories • Lock-off throttle
- APPLICATIONS: Tire patchwork, roughing areas for recapping and cleaning tire moldings • FREE SPEED: 20,000 RPM • MADE IN USA



| ASCOT NO. | MFG. NO.    | DESCRIPTION                               |
|-----------|-------------|-------------------------------------------|
| 157-04038 | SLP-4038    | High-Speed Tire Buffer with Jacob's Chuck |
| 157-14038 | SLP-4038REK | Above with Rear Exhaust Hose Kit          |

## HEAVY DUTY SKIVING TOOL

- APPLICATIONS: Excellent for skiving work due to the more substantial gear package which contributes to durability • FREE SPEED: 2,800 RPM
- Rear exhaust performance • Equipped with safety throttle lever
- Includes one quick-change adapter • MADE IN USA



| ASCOT NO. | MFG. NO.    | DESCRIPTION                      |
|-----------|-------------|----------------------------------|
| 157-06550 | SLP-6550    | Heavy Duty Skiving Tool          |
| 157-16550 | SLP-6550REK | Above with Rear Exhaust Hose Kit |

## LOW-SPEED TIRE BUFFER WITH QUICK CHANGE CHUCK

- FREE SPEED: 2,800 RPM • 90 PSI Required air pressure • 1/4"NPT. Air Inlet
- 3/8" required hose size • WEIGHT: 2.25 lb.
- 8.5" in length • Quick change chuck for fast change of buffing accessories



| ASCOT NO. | MFG. NO.    | DESCRIPTION                                   |
|-----------|-------------|-----------------------------------------------|
| 157-06510 | SLP-6510    | Low-speed tire buffer with quick change chuck |
| 157-16510 | SLP-6510REK | Above with Rear Exhaust Hose Kit              |

## LOW SPEED TIRE BUFFER WITH QUICK CHANGE SLIP CHUCK

- Brass bushings provide performance and durability in tough working conditions • Includes whip hose and exhaust hose • Quick change slip chuck for fast and easy change of buffing wheel • Built-in regulator • Lock off throttle to prevent accidental start ups • Rear exhaust directs air away from the work area • APPLICATIONS: Ideal for patchwork, roughing areas for recapping and cleaning tire moldings • Overhose Kit also Available Separately (175-00873)



| ASCOT NO. | MFG. NO. | DESCRIPTION                                        |
|-----------|----------|----------------------------------------------------|
| 158-10873 | A873K    | Low Speed Tire Buffer with Quick Change Slip Chuck |

## HIGH SPEED BUFFER KIT WITH QUICK CHANGE CHUCK

- Quick change chuck for holding buffing accessories • Lock-off throttle • FREE SPEED: 22,000 RPM • APPLICATIONS: Tire patchwork, roughing areads for recapping and cleaning tire moldings • Includes overhose kit



| ASCOT NO. | MFG. NO. | DESCRIPTION                                   |
|-----------|----------|-----------------------------------------------|
| 158-11871 | A871K-QC | High Speed Buffer Kit with Quick Change Chuck |

## Air Buffers &amp; Drills (cont.)



## HIGH SPEED TIRE BUFFER WITH OVERHOSE KIT

- Jacobs chuck for holding buffing accessories • Lock-off throttle • FREE SPEED: 22,000 RPM • APPLICATIONS: Tire patchwork, roughing areas for recapping and cleaning tire moldings • Includes overhose kit



| ASCOT NO. | MFG. NO. | DESCRIPTION                              |           |
|-----------|----------|------------------------------------------|-----------|
| 158-10871 | A871K    | High Speed Tire Buffer with Overhose Kit | 158-10871 |

## HIGH-SPEED TIRE BUFFER WITH JACOBS CHUCK

- Provides plenty of power with it's .5 horsepower motor and 22,000 RPM, rear exhaust performance
- APPLICATIONS: Ideal for patchwork, roughing areas for recapping and cleaning tire moldings • Equipped with safety throttle lever



| ASCOT NO. | MFG. NO. | DESCRIPTION                                                   |
|-----------|----------|---------------------------------------------------------------|
| 158-00871 | CP-871K  | High-Speed Tire Buffer with Jacobs Chuck - Includes Over Hose |

## LIGHTED LOW-SPEED BUFFER WITH QUICK-CHANGE CHUCK

- Provides light inside the tire without the use of batteries or other external power sources • Volt-Aire patented technology turns the motor into a working generator to bring electricity and light to the work surface for enhanced visibility, safety and productivity • Geared design provides high torque but low speed to prevent burning of work surface • Quick-change chuck allows operator to make rapid changes a variety of tool accessories • MADE IN USA



| ASCOT NO. | MFG. NO.    | DESCRIPTION                                           |
|-----------|-------------|-------------------------------------------------------|
| 157-06520 | SLP-6520L   | Lighted Low-Speed Tire Buffer with Quick Change Chuck |
| 157-16520 | SLP-6520REK | Above with Rear Exhaust Hose Kit                      |

157-06520

## LOW SPEED TIRE BUFFER KIT

- Quick change slip chuck for fast and easy change of buffing wheel • Adjustable speed regulator for precise control • Lock-off throttle to prevent accidental start ups • Rear exhaust directs air away from work area
- FREE SPEED: 2,800 RPM



| ASCOT NO. | MFG. NO. | DESCRIPTION                                    |
|-----------|----------|------------------------------------------------|
| 158-00873 | CP-873K  | Low Speed Tire Buffer Kit - Includes Over Hose |

158-00873



## HEAVY DUTY AIR LOW SPEED TIRE BUFFER

- APPLICATIONS: For quick work of patchwork and roughing up low areas for recapping, tire scuffing and cleaning tire moldings • Free speed up to 3,000 RPM • 1/2 HP motor



| ASCOT NO. | MFG. NO. | DESCRIPTION                                               |           |
|-----------|----------|-----------------------------------------------------------|-----------|
| 157-01327 | IR-327LS | Heavy Duty Air Low Speed Tire Buffer - Includes Over Hose | 157-01327 |

# Tire Repair Tools & Accessories


## SLOTTED FINISHING RASPS



539-02203



539-02206



539-02207




539-02208

LARGE  
VARIETY OF  
SHAPES  
& SIZES


DURABLE &  
EFFICIENT

| ASCOT NO. | MFG. NO. | GRIT    | DESCRIPTION                       |
|-----------|----------|---------|-----------------------------------|
| 539-02203 | 2203     | 36-Grit | 2" x 3/16" Slotted Finishing Rasp |
| 539-02204 | 2204     | 36-Grit | 2" x 3/16" Slotted Finishing Rasp |
| 539-02205 | 2205     | 16-Grit | 2" x 3/8" Slotted Finishing Rasp  |
| 539-02206 | 2206     | 16-Grit | 2" x 3/8" Slotted Finishing Rasp  |
| 539-02207 | 2207     | 36-Grit | 2" x 1/2" Slotted Finishing Rasp  |
| 539-02208 | 2208     | 16-Grit | 2" x 1/2" Slotted Finishing Rasp  |
| 539-02209 | 2209     | 36-Grit | 2" x 3/4" Slotted Finishing Rasp  |
| 539-02210 | 2210     | 16-Grit | 2" x 3/4" Slotted Finishing Rasp  |
| 539-02241 | 2241     | 36-Grit | 2" x 1" Slotted Finishing Rasp    |

## CONTOUR CUP RASPS



539-06310



539-06411

**ASCOT**  
SUPPLY CORPORATION

LARGE  
VARIETY OF  
SHAPES  
& SIZES

DURABLE &  
EFFICIENT

| ASCOT NO. | MFG. NO. | GRIT    | DESCRIPTION                          |
|-----------|----------|---------|--------------------------------------|
| 539-06261 | TCW210   | 36-Grit | 2" x 1-3/8" - 3/8" Arbor Hole        |
| 539-06260 | TCW210   | 16-Grit | 2" x 1-3/8" - 3/8" Arbor Hole        |
| 539-06360 | TCW310   | 36-Grit | 3" x 1" - 3/8" Arbor Hole            |
| 539-06361 | TCW310   | 16-Grit | 3" x 1" - 3/8" Arbor Hole            |
| 539-06310 | TCW315   | 36-Grit | 3" x 1-1/2" - 3/8" Arbor Hole        |
| 539-06311 | TCW315   | 16-Grit | 3" x 1-1/2" - 3/8" Arbor Hole        |
| 539-06312 | TCW315   | 36-Grit | 3" x 1-1/2" - 1/2" Arbor Hole        |
| 539-06313 | TCW315   | 16-Grit | 3" x 1-1/2" - 1/2" Arbor Hole        |
| 539-06314 | TCW315   | 36-Grit | 3" x 1-1/2" Vented - 3/8" Arbor Hole |
| 539-06315 | TCW315   | 16-Grit | 3" x 1-1/2" Vented - 3/8" Arbor Hole |
| 539-06316 | TCW315   | 36-Grit | 3" x 1-1/2" Vented - 1/2" Arbor Hole |
| 539-06317 | TCW315   | 16-Grit | 3" x 1-1/2" Vented - 1/2" Arbor Hole |
| 539-06410 | TCW415   | 36-Grit | 4" x 1-1/2" - 1/2" Arbor Hole        |
| 539-06411 | TCW415   | 16-Grit | 4" x 1-1/2" - 1/2" Arbor Hole        |
| 539-06412 | TCW415   | 36-Grit | 4" x 1-1/2" - 5/8" Arbor Hole        |
| 539-06413 | TCW415   | 16-Grit | 4" x 1-1/2" - 5/8" Arbor Hole        |
| 539-06414 | TCW415   | 36-Grit | 4" x 1-1/2" Vented - 1/2" Arbor Hole |
| 539-06415 | TCW415   | 16-Grit | 4" x 1-1/2" Vented - 1/2" Arbor Hole |
| 539-06416 | TCW415   | 36-Grit | 4" x 1-1/2" Vented - 5/8" Arbor Hole |
| 539-06417 | TCW415   | 16-Grit | 4" x 1-1/2" Vented - 5/8" Arbor Hole |

## Tire Repair Tools & Accessories (cont.)

### B&J NON-REGRITTABLE COPPER CONTOUR WHEELS

• The B&J Contour Wheels have a convex contour, which has proven to be particularly suitable for repairs inside the tire • Smaller models are almost completely covered with grit on their surface, so they can be used at any angle • Also ideal for sidewall machining • The variety of grain sizes available provides an optimum surface for every application



539-10136



539-11036



539-10936




539-10416

| ASCOT NO. | MFG. NO.  | GRIT    | DESCRIPTION                                         |
|-----------|-----------|---------|-----------------------------------------------------|
| 539-10116 | 332001-16 | 16 Grit | 2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"    |
| 539-10123 | 332001-23 | 23 Grit | 2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"    |
| 539-10136 | 332001-36 | 36 Grit | 2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"    |
| 539-10160 | 332001-60 | 60 Grit | 2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"    |
| 539-11016 | 332010-16 | 16 Grit | 3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"    |
| 539-11023 | 332010-23 | 23 Grit | 3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"    |
| 539-11036 | 332010-36 | 36 Grit | 3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"    |
| 539-11060 | 332010-60 | 60 Grit | 3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"    |
| 539-10916 | 332009-16 | 16 Grit | 3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"  |
| 539-10923 | 332009-23 | 23 Grit | 3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"  |
| 539-10936 | 332009-36 | 36 Grit | 3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"  |
| 539-10960 | 332009-60 | 60 Grit | 3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"  |
| 539-10416 | 332004-16 | 16 Grit | 4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8" |
| 539-10423 | 332004-23 | 23 Grit | 4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8" |
| 539-10436 | 332004-36 | 36 Grit | 4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8" |
| 539-10460 | 332004-60 | 60 Grit | 4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8" |

### B&J NON-REGRITTABLE COPPER BUFFOUT WHEELS

• Buffout Tools are ideal for all types of tire repairs • With a variety of sizes and shapes repairs can be carried out quickly and effectively • Due to the narrow tool width of 3 mm and more, the area to be repaired remains as small as necessary and saves unnecessary filling material afterwards • The special design makes the tools durable and efficient




539-15616




539-15816



539-16316



539-16416



539-16516

| ASCOT NO. | MFG. NO.  | GRIT    | DESCRIPTION                                     |
|-----------|-----------|---------|-------------------------------------------------|
| 539-15616 | 332056-16 | 16-Grit | Flat Faced Buffout Wheel 2" x 3/16" (50 x 5mm)  |
| 539-15636 | 332056-36 | 36-Grit | Flat Faced Buffout Wheel 2" x 3/16" (50 x 5mm)  |
| 539-15816 | 332058-16 | 16-Grit | Flat Faced Buffout Wheel 2" x 1/4" (50 x 7mm)   |
| 539-15836 | 332058-36 | 36-Grit | Flat Faced Buffout Wheel 2" x 1/4" (50 x 7mm)   |
| 539-16316 | 332063-16 | 16-Grit | Flat Faced Buffout Wheel 2" x 3/8" (50 x 10mm)  |
| 539-16336 | 332063-36 | 36-Grit | Flat Faced Buffout Wheel 2" x 3/8" (50 x 10mm)  |
| 539-16416 | 332064-16 | 16-Grit | Round Faced Buffout Wheel 2" x 1/2" (50 x 13mm) |
| 539-16436 | 332064-36 | 36-Grit | Round Faced Buffout Wheel 2" x 1/2" (50 x 13mm) |
| 539-16516 | 332065-16 | 16-Grit | Round Faced Buffout Wheel 2" x 3/4" (50 x 19mm) |
| 539-16536 | 332065-36 | 36-Grit | Round Faced Buffout Wheel 2" x 3/4" (50 x 19mm) |



## B & J AIRBOT BUFFOUT WHEELS

• The new AIRBOT® series not only look aggressive, they also work aggressively • With their open design and the angled setup they are much more efficient in getting the job done than any predecessors • Improved cooling • Rounder buffing profile • Longer lifetime • Faster grinding cycles



539-18516/36




539-18616/36



539-18716/36



539-18816/36



539-15516



539-18416

| ASCOT NO. | MFG. NO.  | DESCRIPTION                                             |
|-----------|-----------|---------------------------------------------------------|
| 539-18516 | 132185-16 | RFBOT AIRBOT Ø2"x 3/16", AH 3/8", Grit 16 Buffout Wheel |
| 539-18536 | 132185-36 | RFBOT AIRBOT Ø2"x 3/16", AH 3/8", Grit 36 Buffout Wheel |
| 539-18616 | 132186-16 | RFBOT AIRBOT Ø2"x 1/4", AH 3/8", Grit 16 Buffout Wheel  |
| 539-18636 | 132186-36 | RFBOT AIRBOT Ø2"x 1/4", AH 3/8", Grit 36 Buffout Wheel  |
| 539-18716 | 132187-16 | RFBOT AIRBOT Ø2"x 3/8", AH 3/8", Grit 16 Buffout Wheel  |
| 539-18736 | 132187-36 | RFBOT AIRBOT Ø2"x 3/8", AH 3/8", Grit 36 Buffout Wheel  |
| 539-18816 | 132188-16 | RFBOT AIRBOT Ø2"x 1/2", AH 3/8", Grit 16 Buffout Wheel  |
| 539-18836 | 132188-36 | RFBOT AIRBOT Ø2"x 1/2", AH 3/8", Grit 36 Buffout Wheel  |
| 539-18416 | 132184-16 | RFBOT AIRBOT Ø4"x 1/2", AH 1/2", Grit 16 Buffout Wheel  |
| 539-18436 | 132184-36 | RFBOT AIRBOT Ø4"x 1/2", AH 1/2", Grit 36 Buffout Wheel  |
| 539-15516 | 132155-16 | RFBOT AIRBOT Ø6"x 1/2", AH 1/2", Grit 16 Buffout Wheel  |
| 539-15536 | 132155-36 | RFBOT AIRBOT Ø6"x 1/2", AH 1/2", Grit 36 Buffout Wheel  |

## B & J SUPER PATRIOT CONTOUR WHEEL

• Super Patriot's patented design is significantly efficient since cooling is achieved throughout the entire working surface of the tool due to the concave/convex base design • Customers' feedback after using the Patriot carbides is based on the products significantly longer life vs. conventional carbides




539-28646

| ASCOT NO. | MFG. NO.   | DESCRIPTION                       |
|-----------|------------|-----------------------------------|
| 539-28646 | 133286-460 | 3" X 1-1/4" CWSP 460 grit 3/8" AH |

## B & J HD BUFFOUT WHEELS

• Improved durability  
• Aggressive and efficient • Longer lifetime than conventional "16-grit" carbides



539-33010



539-33009



539-33004



539-33017

| ASCOT NO. | MFG. NO.  | DESCRIPTION                             |
|-----------|-----------|-----------------------------------------|
| 539-32056 | 332056-HD | 2" x 3/16" RFBOT HD Buffout Wheel       |
| 539-32058 | 332058-HD | 2" x 1/4" RFBOT HD Buffout Wheel        |
| 539-32063 | 332063-HD | 2" x 3/8" RFBOT HD Buffout Wheel        |
| 539-32064 | 332064-HD | 2" x 1/2" RFBOT HD Buffout Wheel        |
| 539-32065 | 332065-HD | 2" x 3/4" RFBOT HD Buffout Wheel        |
| 539-33010 | 332010-HD | 3" x 1" Contour Wheel HD Grit 3/8" AH   |
| 539-33009 | 332009-HD | 3" x 1.5" Contour Wheel HD Grit 3/8" AH |
| 539-33004 | 332004-HD | 4" x 1.5" Contour Wheel HD Grit 3/8" AH |
| 539-33017 | 332017-HD | 4" x 1.5" Contour Wheel HD Grit 1/2" AH |

## Tire Repair Tools & Accessories (cont.)

### TIRE REPAIR KNIVES

- Rubber must be cleaned and hole injuries must be cleaned and roughened before inserting repair units

531-60570



531-75190



531-75310



| ASCOT NO. | MFG. NO. | DESCRIPTION                                                                           | BLADE LENGTH   | QTY./BOX |
|-----------|----------|---------------------------------------------------------------------------------------|----------------|----------|
| 531-60570 | X751N    | High carbon steel, hawk bill notch, glaze finish, round burnt finish handle (riveted) | 2" / 51mm      | 12       |
| 531-75190 | X2T      | High carbon steel, taper point, glaze finish, round burnt finish handle (riveted)     | 4" / 102mm     | 12       |
| 531-75310 | X3N      | High carbon steel, round point, thin skiver, glaze finish, round burnt finish handle  | 4-7/8" / 124mm | 12       |
| 531-75200 | X1S      | High carbon steel, square point, glaze finish, round burnt finish handle (riveted)    | 2-1/2" / 64mm  | 12       |
| 531-75170 | X2S      |                                                                                       | 3" / 76mm      | 12       |
| 531-75330 | X3S      |                                                                                       | 3-5/8" / 93mm  | 12       |
| 531-75370 | X4S      |                                                                                       | 3-7/8" / 99mm  | 12       |
| 531-75440 | X5S      |                                                                                       | 4-1/4" / 108mm | 12       |

### RUBBER KNIFE

- High carbon steel, square point, glaze finish, round burnt finish handle (riveted)

531-60150



| ASCOT NO. | MFG. NO.  | DESCRIPTION                                                                        | BLADE LENGTH              | QTY./BOX |
|-----------|-----------|------------------------------------------------------------------------------------|---------------------------|----------|
| 531-60070 | X4x1S     | High carbon steel, square point, glaze finish, round burnt finish handle (riveted) | 4" x 1" / 102 x 26mm      | 12       |
| 531-60090 | X5x1S     |                                                                                    | 5" x 1" / 127 x 26mm      |          |
| 531-60130 | X6x1S     |                                                                                    | 6" x 1" / 152 x 26mm      |          |
| 531-60150 | X8x11/8S  |                                                                                    | 8" x 1-1/8" / 203 x 29mm  |          |
| 531-60170 | X10x11/4S |                                                                                    | 10" x 1-1/4" / 254 x 32mm |          |

### FLEXIBLE TIRE REPAIR KNIFE

- High carbon steel, round point skiver, glaze finish, round burnt finish handle (riveted)



531-75150

| ASCOT NO. | MFG. NO. | DESCRIPTION                                                                              | BLADE LENGTH | QTY./BOX |
|-----------|----------|------------------------------------------------------------------------------------------|--------------|----------|
| 531-75150 | X2RF     | High carbon steel, round point skiver, glaze finish, round burnt finish handle (riveted) | 4" / 102mm   | 12       |

### SKIVING KNIFE

531-70030



531-71050

| ASCOT NO. | MFG. NO. | DESCRIPTION                 |
|-----------|----------|-----------------------------|
| 531-70030 | 70030    | 4-1/2" Handle for X2 Blades |
| 531-71050 | 71050    | 10 Replacement blades       |

### OTHER KNIVES

| ASCOT NO. | MFG. NO. | DESCRIPTION                       |
|-----------|----------|-----------------------------------|
| 531-60300 | 60300    | 4" x 1" Curved Notch Repair Knife |
| 531-60310 | 60310    | 6" x 1-1/2" 5-Notch Trim Knife    |
| 531-75220 | 75220    | 3/8" Curved Point Shoe Knife      |
| 531-75310 | X3N      | 4-7/8" Round Point Skiving Knife  |

## TIRE RELATED HAND TOOLS



537-00045



537-06012



537-06010




537-06014



537-06022

| ASCOT NO. | MFG. NO. | DESCRIPTION                        |
|-----------|----------|------------------------------------|
| 537-00045 | 45       | Retreaders Brush                   |
| 537-06010 | 6010     | Geared Side Cutter for Steel Cords |
| 537-06012 | 6012     | 8" Steel Nippers                   |
| 537-06014 | 6014     | Brass Brush for Cleaning Repair    |
| 537-06022 | 6022     | 9" Whetstone                       |

## PROFESSIONAL HEAVY DUTY TIRE REAMERS



537-17277

| ASCOT NO. | MFG. NO. | DESCRIPTION                            |
|-----------|----------|----------------------------------------|
| 537-17276 | 1-R      | 3/16" Diameter - Blade Length - 6-3/4" |
| 537-17277 | 2-R      | 1/4" Diameter - Blade Length - 8-3/4"  |

## TIRE REPAIR AIR TOOL ACCESSORIES



173-09400



173-09150



173-09165



173-09202



173-09211



173-09212



173-09213



173-09215



173-09216

| ASCOT NO. | MFG. NO. | DESCRIPTION                                         |
|-----------|----------|-----------------------------------------------------|
| 173-00018 | QC18     | Quick Chuck Adapter W/ Collar                       |
| 173-00019 | QC19     | Quick Chuck Adapter W/ Spacer 1" x 3/8" Thread      |
| 173-00020 | QC20     | Quick Chuck Adapter For 1/8" Shank                  |
| 173-00022 | QC22     | Quick Chuck Adapter For 1/4" Shank                  |
| 173-00023 | QC23     | Quick Chuck Adapter For 5/16" Shank                 |
| 173-09150 | SLP-9150 | Jacobs 3/8" Precision Chuck and Key                 |
| 173-09165 | SLP-9165 | Quick Change Chuck - 3/8"-24 Mounting Thread        |
| 173-09166 | SLP-9166 | Quick Change Chuck - 1/2"-13 Mounting Thread        |
| 173-09167 | SLP-9167 | Quick Change Chuck - 1/2"-20 Mounting Thread        |
| 173-09201 | SLP-9201 | 1-11/16" x 3/8"-24 Chuck Adapter w/Washer & Nut     |
| 173-09202 | SLP-9202 | 2-3/4" x 3/8"-24 Chuck Adapter w/Nut & Wheel Spacer |
| 173-09211 | SLP-9211 | 1-7/8" x 3/8"-24 Threaded Adapter w/Washer & Nut    |
| 173-09212 | SLP-9212 | 2-1/4" x 3/8"-24 Threaded w/ Nut & Wheel Spacer     |
| 173-09213 | SLP-9213 | 1-15/16" Adapter w/Set Screw for 1/8" Shank         |
| 173-09214 | SLP-9214 | 1-15/16" Adapter w/Set Screw for 3/16" Shank        |
| 173-09215 | SLP-9215 | 1-15/16" Adapter w/Set Screw for 1/4" Shank         |
| 173-09216 | SLP-9216 | 1-15/16" Adapter w/Set Screw for 5/16" Shank        |
| 173-09400 | SLP-9400 | Overhose Kit                                        |

## Tire Repair Tools & Accessories (cont.)

### INSERTION TOOLS

| ASCOT NO. | MFG. NO. | DESCRIPTION                                                    | HANDLE |
|-----------|----------|----------------------------------------------------------------|--------|
| 537-90116 | TST      | Metal T-Handle Automotive/<br>Light Truck Insertion Tool       | Metal  |
| 537-90144 | TTT      | Metal T-Handle Truck Insertion Tool                            | Metal  |
| 537-91119 | APRBR    | Metal T-Handle Spiral Probe for<br>Automotive/Light Truck      | Metal  |
| 537-10010 | SSTA     | Metal T-Handle Insertion Tool<br>for Auto/Light Truck: 6"      | Metal  |
| 537-10012 | SSTT     | Metal T-Handle Insertion Tool for Truck: 8"                    | Metal  |
| 537-10017 | SSPS     | Metal T-Handle Probe Spiral<br>for Auto/Light Truck: 6"        | Metal  |
| 537-10021 | SSPT     | Metal T-Handle Probe Spiral for Truck: 8"                      | Metal  |
| 537-90135 | AWRN35   | Replacement Needle: 3-1/2"                                     | -      |
| 537-90155 | AWRN55   | Replacement Needle: 5-1/2"                                     | -      |
| 537-10011 | SSNA     | Replacement Needle for Auto/<br>Light Truck Insertion Tool: 5" | -      |
| 537-10013 | SSNT     | Replacement Needle for Truck<br>Insertion Tool: 6-3/4"         | -      |

| ASCOT NO. | MFG. NO. | DESCRIPTION                                          | HANDLE  |
|-----------|----------|------------------------------------------------------|---------|
| 537-90006 | TST      | Chrome Plated T-Handle with<br>3" Replaceable Needle | Chrome  |
| 537-90019 | TSPRB    | Chrome Plated T-Handle Spiral Probe                  | Chrome  |
| 537-90200 | TSBRP    | Chrome Plated T-Handle with Barbed Rasp              | Chrome  |
| 537-90002 | SEPG     | Plastic Pistol Grip Handle - Short                   | Plastic |
| 537-90003 | OETT     | Plastic T-Handle                                     | Plastic |
| 537-90005 | OE11     | Heavy Duty Screwdriver-Type Handle: 11"              | Plastic |
| 537-90009 | SPPG     | Plastic Pistol Grip Handle Spiral Probe              | Plastic |
| 537-90150 | PI50     | Heavy Duty Screwdriver-Type<br>Handle Barbed Rasp    | Plastic |
| 537-90201 | PPG      | Plastic Pistol Grip Handle Barbed Rasp               | Plastic |
| 537-90035 | WRN35    | Replacement Needle: 3-1/2"                           | -       |
| 537-90045 | WRN45    | Replacement Needle: 4-1/2"                           | -       |
| 537-90119 | PRBR     | Replacement Spiral Probe                             | -       |



## MISC. INSERTION TOOLS, RASPS &amp; NEEDLES

| ASCOT NO. | MFG. NO. | DESCRIPTION                                        |
|-----------|----------|----------------------------------------------------|
| 537-00027 | 27       | Replacement Blades for Rubber Scraper              |
| 537-00028 | 28       | Rubber Scraper                                     |
| 537-00575 | 575      | Truck Repair Insertion Tool                        |
| 537-00585 | 585      | EM Repair Insertion Tool                           |
| 537-02240 | 6003     | Radial Tire Repair Specialist Rasp - 1/4"          |
| 537-02241 | 6003T    | Radial Tire Repair Specialist Rasp for Truck Tires |
| 537-10565 | 565      | Car Repair Insertion Tool                          |
| 537-36560 | 190      | Awl/Probe                                          |
| 537-95893 | 199      | Probe Buffer/Stickleback Rasp                      |
| 537-15224 | 14-925   | Super-Grip Open-Eye Needle                         |
| 537-15225 | 14-204   | Super-Grip Tire Probe                              |
| 537-15226 | 14-213   | Super-Grip Closed-Eye Needle                       |
| 537-15227 | 14-216   | Super-Grip Spilt-Eye Needle                        |
| 537-15230 | 14-317   | Heavy Duty Metal Split-Eye Needle                  |
| 537-15232 | 14-204   | Super-Grip Heavy Duty Tire Probe                   |




## Tire Repair Tools &amp; Accessories (cont.)



## Rubberhog® Tire Repair Tools

Rubberhog features innovations from the leader in the industry. The Rubberhog Original SSG coating uses the best technology to ensure peace of mind.

- Buffs cooler, no scorching
- Fantastic wear life; costing you less per repair
- Better surface texture for a safer bond
- Faster material removal, for a quicker repair

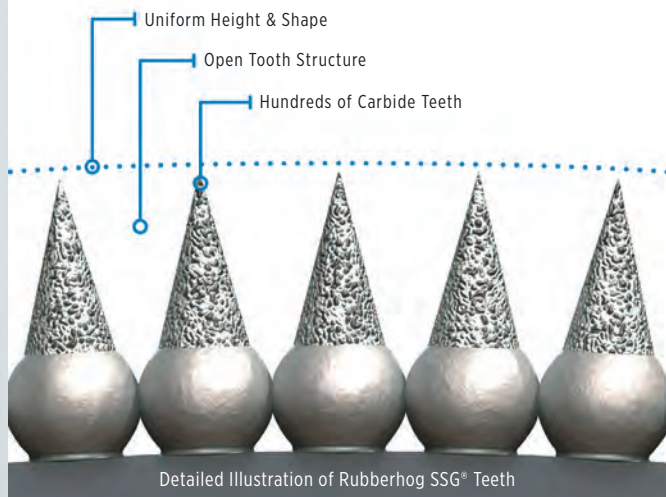

### LOW-PROFILE PATCH PREP WHEEL

- Unique design allows buffing in low profile tires without risking sidewall damage
- Solid steel construction makes this the smoothest running product available



538-14000

| ASCOT NO. | MFG. NO. | DESCRIPTION                                 |
|-----------|----------|---------------------------------------------|
| 538-14000 | 140      | 1-1/4" Dia., 3/8"-24 Thread, Fine (SSG 170) |


### FLARED CONTOUR WHEELS

The unique profile of the Flared Contour Wheels properly matches the shape of the tire.

- Provides wide, level contact with surface
- Efficient use of the entire tool
- Easier to use - less operator fatigue
- Reduced buffing time



538-10700



538-11200



538-12200

SMOOTH OPERATION


REDUCED BUFFING TIME

| ASCOT NO. | MFG. NO.  | DESCRIPTION                                |
|-----------|-----------|--------------------------------------------|
| 538-10000 | RH100     | 1-3/4" Dia., 3/8" Bore, Fine (SSG 170)     |
| 538-10200 | RH102     | 1-3/4" Dia., 3/8" Bore, Medium (SSG 230)   |
| 538-10317 | RH130-170 | 2" Dia., 3/8" Bore, Fine (SSG 170)         |
| 538-10323 | RH130-230 | 2" Dia., 3/8" Bore, Medium (SSG 230)       |
| 538-10700 | RH107     | 2-1/2" Dia., 3/8" Bore, Fine (SSG 170)     |
| 538-10900 | RH109     | 2-1/2" Dia., 3/8" Bore, Medium (SSG 230)   |
| 538-11100 | RH111     | 2-1/2" Dia., 3/8" Bore, Coarse (SSG 390)   |
| 538-11200 | RH112     | 3" Dia., 3/8" Bore, Fine (SSG 170)         |
| 538-11400 | RH114     | 3" Dia., 3/8" Bore, Medium (SSG 230)       |
| 538-11600 | RH116     | 3" Dia., 3/8" Bore, Coarse (SSG 390)       |
| 538-11800 | RH118     | 3-1/2" Dia., 3/8" Bore, SSG Fine (SSG 170) |
| 538-12000 | RH120     | 3-1/2" Dia., 3/8" Bore, Medium (SSG 230)   |
| 538-12200 | RH122     | 3-1/2" Dia., 3/8" Bore, Coarse (SSG 390)   |



## POLYPLUGS FOR FLARED CONTOUR WHEELS

- Easily fits inside the contour wheel
- Compensates for mounting inaccuracies
- Reduces vibration for smoother, quieter, more comfortable operation
- Reusable!
- Protects from wheel damage



REUSABLE!

| ASCOT NO. | MFG. NO. | DESCRIPTION     |
|-----------|----------|-----------------|
| 538-15000 | RH150    | 1-3/4" PolyPlug |
| 538-15100 | RH151    | 2" PolyPlug     |
| 538-15200 | RH152    | 2-1/2" PolyPlug |
| 538-15400 | RH154    | 3" PolyPlug     |
| 538-15600 | RH156    | 3-1/2" PolyPlug |

## ECONOMY FLARED CONTOUR WHEEL

- Proven Rubberhog shape
- Uses the Standard Grit coating for an economical solution
- Reduced aggressiveness for the less experienced user
- Much safer than black stones!



538-13000

| ASCOT NO. | MFG. NO. | DESCRIPTION                          |
|-----------|----------|--------------------------------------|
| 538-13000 | RH130    | 2" Contour Wheel, 3/8" Bore, 60 Grit |

## BUZZOUT WHEELS

- Free cutting and long lasting
- Fully-rounded profile
- Excellent for bias tires
- Use for skiving on high-tread radial tires; not recommended for contact with steel cord



538-30400

| ASCOT NO. | MFG. NO. | DESCRIPTION                   |
|-----------|----------|-------------------------------|
| 538-30000 | RH300    | 2" x 1/4" W, Medium (SSG 230) |
| 538-30200 | RH302    | 2" x 1/4" W, Coarse (SSG 390) |
| 538-30400 | RH304    | 2" x 3/8" W, Medium (SSG 230) |
| 538-30600 | RH306    | 2" x 3/8" W, Coarse (SSG 390) |
| 538-30500 | RH308    | 2" x 1/2" W, Medium (SSG 230) |
| 538-31000 | RH310    | 2" x 1/2" W, Coarse (SSG 390) |
| 538-31200 | RH312    | 2" x 3/4" W, Medium (SSG 230) |
| 538-31400 | RH314    | 2" x 3/4" W, Coarse (SSG 390) |

## 1/4" SHAFT SPHERES

- Larger Spheres are excellent for high-tread skiving
- Smaller Spheres chamfer around injuries on liner; don't take a chance on entrapped air!



538-60100

| ASCOT NO. | MFG. NO. | DESCRIPTION                                 |
|-----------|----------|---------------------------------------------|
| 538-60100 | RH601    | 5/8" Sphere, 1/4" Shaft, Coarse (SSG 330)   |
| 538-60300 | RH603    | 7/8" Sphere, 1/4" Shaft, Coarse (SSG 330)   |
| 538-60500 | RH605    | 1-1/8" Sphere, 1/4" Shaft, Coarse (SSG 330) |

## 1/4" & 1/8" SHAFT TAPERS

- Excellent for high-tread skiving



538-61100

| ASCOT NO. | MFG. NO. | DESCRIPTION                              |
|-----------|----------|------------------------------------------|
| 538-61100 | RH611    | 5/8" Taper, 1/4" Shaft, Coarse (SSG 330) |
| 538-61300 | RH613    | 7/8" Taper, 1/4" Shaft, Coarse (SSG 330) |
| 538-00018 | T-18-E   | 1/8" Taper, 1/8" Shaft, Fine (SSG 170)   |

## 1/8" SHAFT REPAIR KIT

- Perfect for very small repairs



538-63500

| ASCOT NO. | MFG. NO. | DESCRIPTION                         |
|-----------|----------|-------------------------------------|
| 538-63500 | RH635    | 1/8" Shaft Tool Kit, Fine (SSG 170) |

## Tire Repair Tools &amp; Accessories (cont.)

## 1/4" &amp; 1/8" SHAFT ROTOR SAWS

- Excellent for high-tread skiving



538-61900

| ASCOT NO. | MFG. NO. | DESCRIPTION                                    |
|-----------|----------|------------------------------------------------|
| 538-61900 | RH619    | 1-3/8" Rotor Saw, 1/4" Shaft, Coarse (SSG 330) |
| 538-00340 | RS-34-E  | 3/4" Rotor Saw, 1/8" Shaft, Fine (SSG 170)     |

## NAIL HOLE REAMERS

- For bias tires



538-62600

| ASCOT NO. | MFG. NO. | DESCRIPTION                                 |
|-----------|----------|---------------------------------------------|
| 538-62600 | RH626    | 1/4" x 3" NHR, 1/4" Shaft, Coarse (SSG 330) |

## RETREADING SIDEWALL WHEELS

- Designed for shoulder and sidewall preparation • Used on manual or automatic sidewall buffers • Fast and effective removal of oxidized rubber • Used with or without traditional wire brushes • Excellent durability, reducing your cost per buff • Provides a uniform texture maximizing rubber-to-rubber bond



538-70800



| ASCOT NO. | MFG. NO. | DESCRIPTION                                                                  |
|-----------|----------|------------------------------------------------------------------------------|
| 538-12900 | RH129    | 4" Buffing Cup, 3/4" Arbor Hole, Coarse (SSG 390)<br>*Bandag pre-8400 series |
| 538-70750 | RH707-50 | 6" x 50mm Donut Wheel, Very Coarse (SSG 460)                                 |
| 538-70800 | RH708    | 6" x 1" x 1-1/2" Donut Wheel, Coarse (SSG 390)                               |
| 538-70850 | RH708-50 | 6" x 50mm Donut Wheel, Coarse (SSG 390)                                      |

DISC/DISH  
SIDEWALL WHEELS

- For angle head machines; section repair & cosmetics



## DISC VS. DISH SHAPE

The Disc shape is just slightly curved while the Dish is much more rounded. The selection of shape is based on operator preference, and the job being done. Both wheels are excellent for exterior repair work, while the Dish Wheel can also be used inside of very large tires.



Sidewall Disc.




Dish Wheel


| ASCOT NO. | MFG. NO.  | DESCRIPTION                                    |
|-----------|-----------|------------------------------------------------|
| 538-41239 | DW4120390 | 4-1/2" Dish Wheel, 7/8" Bore, Coarse (SSG 390) |
| 538-41223 | DW4120230 | 4-1/2" Dish Wheel, 7/8" Bore, Medium (SSG 230) |
| 538-42239 | SD4120390 | 4-1/2" Disc, 7/8" Bore, Coarse (SSG 390)       |
| 538-42223 | SD4120230 | 4-1/2" Disc, 7/8" Bore, Medium (SSG 230)       |

## ROTARY KNIFE BLADES

- Cuts and textures ends of pre-cured tread • Fits popular tread builders • Long-Lasting!




538-10134



538-10013



538-10135



538-10020

| ASCOT NO. | MFG. NO.         | DESCRIPTION                                 |
|-----------|------------------|---------------------------------------------|
| 538-10134 | RH100-GEG-134    | 6" x 1-3/4", 150 Grit *Salisbury + Oliver   |
| 538-10135 | RH100-GEG-134-80 | 6" x 1-3/4", 80 Grit *Salisbury + Oliver    |
| 538-10013 | RH100-GEG-138    | 6" x 1-3/8", 150 Grit *Cahill               |
| 538-10014 | RH100-GEG-138-80 | 6" x 1-3/8", 80 Grit *Cahill                |
| 538-10020 | RH100-GEG-200    | 6" x 2", 150 Grit *Bandag 5110, All Matuzzi |
| 538-10021 | RH100-GEG-200-80 | 6" x 2", 80 Grit *Bandag 5110, All Matuzzi  |



# The new B&J Hornet Carbides

## B&J HORNET CARBIDES

### THE NEXT GENERATION OF CARBIDE TECHNOLOGY

B&J Hornet Carbides feature long-lasting cutting teeth arranged into a unique open pattern providing a uniform surface texture for a safer bond. B&J Hornet Carbides are available in many shapes, sizes and textures.

| GRIT CROSS-REFERENCE | GRIT SIZE |              |
|----------------------|-----------|--------------|
| R=RED                | 50        | FINE         |
| O=ORANGE             | 70        |              |
| Y=YELLOW             | 90        |              |
| G=GREEN              | 100       |              |
| B=BLUE               | 125       |              |
| P=PURPLE             | 132       | SUPER COARSE |

### GRIT CHART KEY



## B&J HORNET CARBIDES



APPLICATION GUIDE



### CONTOUR WHEELS

2" + 2.5"



### CONTOUR WHEELS

3" + 3.5"



### UNIT WHEELS

3" + 4"



### UNIT WHEELS EUROPE

3" + 4"



### SMALL + MEDIUM CONES

5/8" + 7/8"



### ROUND BALLS

1" + 1.25"



### ROUND FACED BUFFOUT WHEELS

2"



### PENCIL RASP

0.25" x 2"



## Tire Repair Tools & Accessories (cont.)

### DUALIFE® KNOT TYPE WIRE WHEEL BRUSHES-STANDARD TWIST

| ASCOT NO. | MFG. NO. | DIA. | WIRE SIZE | RPM    | ARBOR HOLE |
|-----------|----------|------|-----------|--------|------------|
| 535-08014 | 08014    | 3"   | .014"     | 25,000 | 1/2"-3/8"  |
| 535-08034 | 08034    | 4"   | .0118"    | 20,000 | 1/2"-3/8"  |
| 535-08044 | 08044    | 4"   | .014"     | 20,000 | 1/2"-3/8"  |
| 535-08075 | 08075    | 6"   | .0118"    | 9,000  | 5/8"-1/2"  |
| 535-08085 | 08085    | 6"   | .014"     | 9,000  | 5/8"-1/2"  |



535-08014



535-13533

### POWER BRUSHES

| ASCOT NO. | MFG. NO. | DESCRIPTION               |
|-----------|----------|---------------------------|
| 535-13533 | 13533    | Standard Twist Tire Wheel |
| 535-70179 | 70179    | 3" Brush                  |

### COPPER CENTER® WIRE WHEEL BRUSHES (WIRE FILL)

| ASCOT NO. | MFG. NO. | DIA.   | WIRE SIZE | RPM    | ARBOR HOLE |
|-----------|----------|--------|-----------|--------|------------|
| 535-15322 | 15322    | 1-1/2" | .0104"    | 20,000 | 3/8"       |
| 535-15443 | 15443    | 2"     | .008"     | 20,000 | 1/2"       |
| 535-15463 | 15463    | 2"     | .0118"    | 20,000 | 1/2"-3/8"  |
| 535-15533 | 15533    | 3"     | .006"     | 20,000 | 1/2"-3/8"  |
| 535-15543 | 15543    | 3"     | .008"     | 20,000 | 1/2"-3/8"  |
| 535-15563 | 15563    | 3"     | .0118"    | 20,000 | 1/2"-3/8"  |



535-15443

### POWER & HAND TUBE BRUSHES



535-21072

### POLYFLEX® ENCAPSULATED WHEELS-BURGUNDY ELASTOMER (STANDARD)

| ASCOT NO. | MFG. NO. | DIA. | WIRE SIZE | RPM    | ARBOR HOLE |
|-----------|----------|------|-----------|--------|------------|
| 535-35070 | 35070    | 2"   | .014"     | 20,000 | 1/2"       |
| 535-35240 | 35240    | 2"   | .0104"    | 20,000 | 1/2"       |
| 535-35250 | 35250    | 3"   | .0118"    | 20,000 | 1/2"       |



535-35240

| ASCOT NO. | MFG. NO. | DESCRIPTION                                 |
|-----------|----------|---------------------------------------------|
| 535-21072 | 21072    | 1/4" Diameter, Wire Size: .004", OAL 3-1/2" |
| 535-21073 | 21073    | 3/8" Dia, .004", OAL 3-1/2"                 |
| 535-21074 | 21074    | 1/2" Diameter, Wire Size: .005", OAL 3-1/2" |
| 535-21076 | 21076    | 3/4" Diameter, Wire Size: .006", OAL 3-1/2" |

### KNOTTED END AND POWER BRUSHES

• Features a hollow end and heavy duty brushing action with some flexibility • Ideal for more demanding cleaning applications in recessed areas



535-14174



535-14177



535-14178

HEAVY DUTY

| ASCOT NO. | MFG. NO. | STYLE                             | SIZE   | ARBOR      | FILL WIRE | WIRE DIA. | TRIM LENGTH | RPM    |
|-----------|----------|-----------------------------------|--------|------------|-----------|-----------|-------------|--------|
| 535-14174 | 14174    | Single Row Knotted Wire Cup Brush | 3-1/2" | 5/8"-11NC  | Steel     | 0.023"    | 7/8"        | 13,000 |
| 535-14177 | 14177    | Single Row Knotted Wire Cup Brush | 3-1/2" | 3/8"-24UNF | Steel     | 0.023"    | 7/8"        | 13,000 |
| 535-14178 | 14178    | Knotted End Brush                 | 1-1/8" | 1/4" Shank | Steel     | 0.014"    | 1-1/8"      | 20,000 |
| 535-14185 | 14185    | Knotted End Brush                 | 1-1/8" | 1/4" Shank | Steel     | 0.020"    | 7/8"        | 22,000 |

## 3" - 10" POWER BRUSHES

- Provide heavy duty brushing action with some flexibility • Ideal for demanding cleaning applications on somewhat irregular surfaces



535-14165



535-14170



535-14171



535-14172



535-14173



535-14175



535-14176



535-14179



535-14182

| ASCOT NO. | MFG. NO. | STYLE            | SIZE   | WIDTH/FACE | ARBOR      | FILL WIRE | WIRE DIA. | TRIM LENGTH | RPM    |
|-----------|----------|------------------|--------|------------|------------|-----------|-----------|-------------|--------|
| 535-14165 | 14165    | Twist Knot       | 3"     | 3/8"       | 1/2"-3/8"  | Steel     | 0.014"    | 5/8"        | 25,000 |
| 535-14170 | 14170    | Mounted Knot     | 3-1/4" | 3/8"       | 1/4" Shank | Steel     | 0.014"    | 5/8"        | 25,000 |
| 535-14171 | 14171    | Twist Knot       | 4"     | 1/2"       | 1/2"-3/8"  | Steel     | 0.0118"   | 7/8"        | 25,000 |
| 535-14172 | 14172    | Twist Knot       | 4"     | 1/2"       | 1/2"-3/8"  | Steel     | 0.014"    | 7/8"        | 25,000 |
| 535-14173 | 14173    | Twist Knot       | 4"     | 1/2"       | 5/8"-11    | Steel     | 0.020"    | 7/8"        | 25,000 |
| 535-14175 | 14175    | Twist Knot       | 4"     | 1/2"       | 1/2"-3/8"  | Steel     | 0.020"    | 7/8"        | 25,000 |
| 535-14176 | 14176    | Cable Twist Knot | 4"     | 1/4"       | 1/2"-3/8"  | Steel     | 0.020"    | 7/8"        | 25,000 |
| 535-14179 | 14179    | Cable Twist Knot | 10"    | 1-3/4"     | 2"         | Steel     | 0.023"    | 1-3/4"      | 4,500  |
| 535-14182 | 17682    | Mounted Knot     | 3-1/4" | 3/8"       | 1/4" Shank | Steel     | 0.020"    | 5/8"        | 25,000 |



### RPG AIR POWERED TIRE REPAIR VACUUM

- Quick change from blow to vacuum function
- KIT INCLUDES: Plastic body gun, dust bag, 2 extension tubes, shop brush, flat tube, tiny tube


537-00003

BLOW/  
VACUUM  
FUNCTIONS

| ASCOT NO. | MFG. NO. | DESCRIPTION                        |
|-----------|----------|------------------------------------|
| 537-00003 | VBG2     | RPG Air Powered Tire Repair Vacuum |

## Tire Repair Tools & Accessories (cont.)

### CARBIDE CUTTING TOOLS

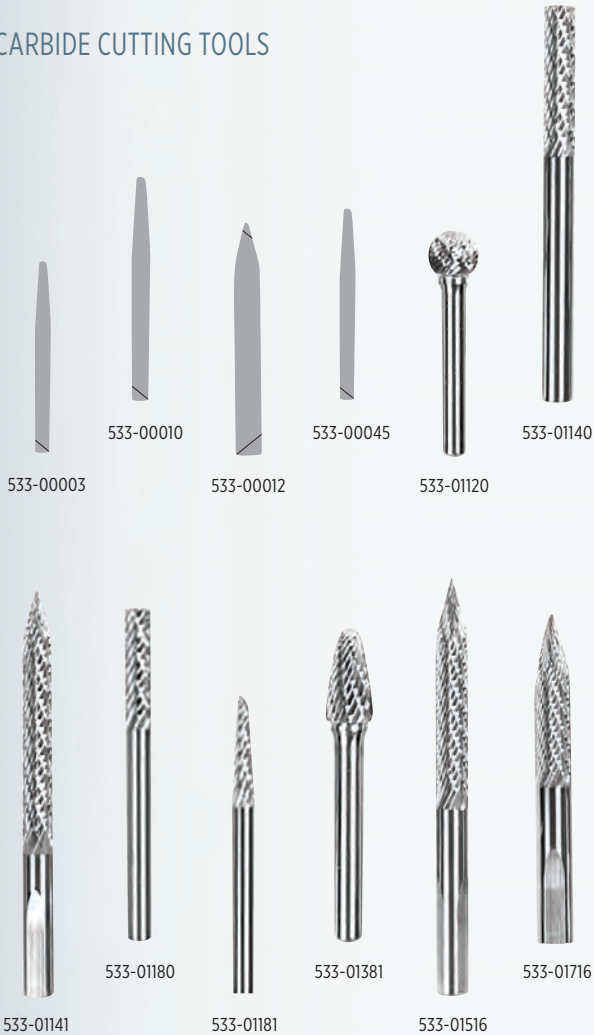

| ASCOT NO. | MFG. NO. | DESCRIPTION                        |
|-----------|----------|------------------------------------|
| 533-00003 | CB3      | 1/8" (3mm) Pointed End             |
| 533-00010 | CB10     | 3/8" (10mm) Pointed End            |
| 533-00012 | CB12     | 1/2" (12mm) Pointed End            |
| 533-00045 | CB4.5    | 1/8" (4.5mm) Pointed End           |
| 533-01120 | BU12B    | 1/2" Ball Burr                     |
| 533-01140 | BU14R    | 1/4" Router Burr                   |
| 533-01141 | BU14TR   | 1/4" Long Taper Burr               |
| 533-01180 | BU18R    | 1/8" Router Burr                   |
| 533-01181 | BU18T    | 1/8" Taper Burr                    |
| 533-01182 | BU18TL   | 1/8" Taper Burr, 3" Overall Length |
| 533-01381 | BU38T    | 3/8" Tree Burr                     |
| 533-01516 | BU516NR  | 5/16" Long Taper Burr              |
| 533-01716 | BU716N   | 7/16" Long Taper Burr              |
| 533-01732 | BU732N   | 7/32" Long Taper Burr              |

### BUFFING STONES FOR STEELBELTED TIRES



| ASCOT NO. | MFG. NO. | DESCRIPTION                                             |
|-----------|----------|---------------------------------------------------------|
| 534-80001 | A-1      | Large Cone - 3/4" Stone Diameter                        |
| 534-80005 | A-5      | Small Cone - 3/4" Stone Diameter                        |
| 534-80011 | A-1B     | Large Cone 3/4" Stone Diameter (Brown)                  |
| 534-80015 | A-15     | Pencil Point - 1/4" Stone Diameter                      |
| 534-80024 | A-24     | Round Head Pencil - 1/4" Stone Diameter                 |
| 534-80036 | A-36     | Stone Disc - 1-3/4" Diameter                            |
| 534-80037 | A-37     | Stone Disc - 1-1/4" Stone Diameter                      |
| 534-80115 | A-15B    | Pencil Point - 1/4" Stone Diameter-Brown                |
| 534-80136 | A-36B    | Stone Disc - 1-3/4" Diameter -Brown                     |
| 534-80137 | A-37B    | Stone Disc - 1-1/4" Diameter-Brown                      |
| 534-81115 | A-15SS   | Pencil Point 1/4" Stone Diameter, Stainless Steel Shank |

### BUFFING WHEEL

• For use on tires or tubes • Coarse grit, round nose • Tungsten carbide

| ASCOT NO. | MFG. NO. | DESCRIPTION                    |
|-----------|----------|--------------------------------|
| 539-10001 | BC-1     | Buffing Wheel, 2-1/2" diameter |





## CHANNELLOCK PLIERS

- 100% MADE IN USA
- LASER heat-treated cutting edges perform better and last longer
- FORGED high carbon U.S. steel for maximum strength and durability is specially coated for ultimate rust prevention
- CHANNELLOCK BLUE® grips for comfort



| ASCOT NO. | MFG. NO. | DESCRIPTION                             |
|-----------|----------|-----------------------------------------|
| 319-00337 | 337      | 7" High Leverage Diagonal Cutting Plier |
| 319-00357 | 357      | 7" End Cutting Plier                    |
| 319-00358 | 358      | 8" End Cutting Plier                    |
| 319-00436 | 436      | 6" Diagonal Cutting Plier, Box Joint    |
| 319-00526 | 526      | 6" Slip Joint Plier, Wire Cutting Shear |

## STITCHERS

- Corrugated ball bearing stitcher with hardened steel wheel and varnished wooden handle



| ASCOT NO. | MFG. NO. | DESCRIPTION                                |
|-----------|----------|--------------------------------------------|
| 536-00001 | CS-1     | 1-1/2" x 1/16" Corrugated Stitcher         |
| 536-01121 | VT-1121A | 1.5" x 1/16" Economy Ball-Bearing Stitcher |
| 536-01122 | VT-1121B | 1.5" x 1/8" Economy Ball-Bearing Stitcher  |
| 536-02040 | MRO2040  | 2" x 2" Flat Roller                        |
| 536-02890 | MRO2890  | 2" x 1/16" Corrugated Stitcher             |
| 536-02910 | MRO2910  | 2" x 1/4" Corrugated Stitcher              |
| 536-06500 | MRO6500  | 2" x 2" Porcupine Roller                   |

## GOOSENECK STITCHER

- Ideal repair tool for trucks, cars and motorcycles • Durable and ergonomic handle to reduce user fatigue



| ASCOT NO. | MFG. NO. | DESCRIPTION                    |
|-----------|----------|--------------------------------|
| 536-00101 | NS-TS01  | 1.5" x 1/8" Gooseneck Stitcher |

## Tire Repair Tools & Accessories (cont.)

### TUBELESS TIRE INSERT KIT

- For use on the wheel • Designed for emergency repairs • Fast and easy application • Made in the USA by Western States/Elgi

FOR  
EMERGENCY  
REPAIRS

FAST AND  
EASY TO  
APPLY

#### PARTS INCLUDED

1 HD chrome T-Handle slot eye inserter w/ replaceable needle


1 HD chrome T-Handle spiral probe w/ replaceable probe

#### PARTS INCLUDED

60 brown string inserts

1 plug lubricant

1 razor knife

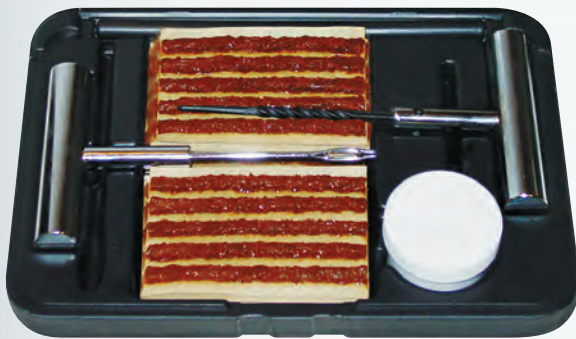

518-90060

| ASCOT NO. | MFG. NO. | DESCRIPTION              |
|-----------|----------|--------------------------|
| 518-90060 | ATS60K   | Tubeless Tire Insert Kit |

### TIRE PROBE AWL

- Used to inspect injuries in tires and to remove small stones and debris

REMOVES  
SMALL  
STONES &  
DEBRIS



537-00001

| ASCOT NO. | MFG. NO. | DESCRIPTION      |
|-----------|----------|------------------|
| 537-00001 | AWL-1    | Black Handle Awl |

### INNERLINER SCRAPER

- This tool is a must for professional tire repairs
- Eliminates power buffing on many tire repairs
- Scraper removes material that might contaminate buffing wheels, ensuring a better repair every time

FOR PRO  
TIRE  
REPAIRS



537-00004

| ASCOT NO. | MFG. NO. | DESCRIPTION                     |
|-----------|----------|---------------------------------|
| 537-00004 | S-4      | Black Handle Innerliner Scraper |

### BLACK HANDLED TIRE DENAILER

- Recessed tip to allow nails or other puncturing objects to be pushed back through the tire • MADE IN THE USA

RECESSED  
TIP



537-00353

| ASCOT NO. | MFG. NO. | BLADE LENGTH | RECESS DEPTH | POINT DIAMETER | OVERALL LENGTH |
|-----------|----------|--------------|--------------|----------------|----------------|
| 537-00353 | 353      | 7"           | 1/8"         | 5/16"          | 6-1/2"         |

### TIRE REPAIR TOOL POUCH

- Durable nylon pouch • 3-color tread depth gauge • 5-50 psi pencil gauge • Valve core tool • White crayon • Ink pen

DURABLE  
NYLON  
POUCH



| ASCOT NO. | MFG. NO. | DESCRIPTION            |
|-----------|----------|------------------------|
| 736-10004 | TTP      | Tire Repair Tool Pouch |

736-10004

### XLIGHT TIRE SERVICE LED WORK LIGHT

- Designed for hands-free lighting during tire service and other work applications • 14" adjustable spring-tube for optimum light positioning within tight spaces • 2-stage compact high-power LED light provides 125 & 250 lumen output • Multiple high-power magnets on the handle and light-head attract easily to most metal surfaces
- Lithium-ion rechargeable battery • Compatible with all passenger, light truck and commercial truck tires • Compatible with all tire spreaders

| ASCOT NO. | MFG. NO. | DESCRIPTION                        |
|-----------|----------|------------------------------------|
| 312-14923 | 14-923   | XLight Tire Service LED Work Light |



312-14923

### LED WORK LAMP ASSEMBLY

- LED worklamp for tire spreaders • Directional spotlight for increased visibility • 8W COB LED will provide 650 Lumens, 750 Lux at 1M • Stays cool to the touch • Heavy duty LED lens • Swivel head • Stays cool to the touch • Adjustable, flexible gooseneck • Includes mounting bracket

| ASCOT NO. | MFG. NO. | DESCRIPTION            |
|-----------|----------|------------------------|
| 312-08473 | TR8473   | LED Work Lamp Assembly |



312-08473



### HEAD LIGHT WITH RECHARGEABLE BATTERY

- Hands-free, versatile and comfortable with adjustable straps • MATERIAL: Aluminum + ABS+PC • LED: 1-piece high power CREE T6 bulb • BRIGHTNESS: Approx. 500LM for high mode • 4-MODE LED LAMPS: High - Low - Strobe - off • WORKING TIME: Approx. 6 hours on High; Approx. 12 hours on Low • CHARGING TIME: Approx. 5 hours • RECHARGEABLE BATTERIES: 2x 3.7V 1800mAh Li-ion batteries (3600mAh total battery capacity) • Sensor Function • USB cable included

| ASCOT NO. | MFG. NO. | DESCRIPTION                               |
|-----------|----------|-------------------------------------------|
| 312-03120 | THL2019  | CREE Head Light with Rechargeable Battery |



312-03120

### TIRE SERVICE LED WORK LIGHT & REPLACEMENT LAMP HEAD

- 1-piece 3W high power LED • Three convenient switch modes so that you can operate at the power you need: High - Low - Off • Working time of approx. 3 hours • Charging time of approx. 3 hours • Brightness of approx. 200LM for High & 80LM for Low • Magnet on lamp body and head • Charging indicator on lamp head • Detachable head with quick-clip mounting to body • Smart clamp design for 9mm-32mm distance • MULTI USE - Clamping, magnetic, hand-held • Battery: Customized 3.7V 900mAh rechargeable polymer battery • INCLUDED: 5V 0.6A (UL) adapter + USB cable

| ASCOT NO. | MFG. NO. | DESCRIPTION                                  |
|-----------|----------|----------------------------------------------|
| 312-04146 | TWL3035  | Tire Service LED Light w/ USB Adapter        |
| 312-04147 | TWL3035H | Replacement Lamp Head for Tire Service Light |



312-04146

# Tire Spreaders & Repair Stations

**MTP, Inc.**

## HEAVY DUTY TUBELESS TRUCK TUBE/TIRE DUNKERS

- Space saving design requires 40% less space • New design fits in left or right corners • Entire rim and tire are checked for air leaks simultaneously
- ONE MAN OPERATION: Safe and easy to operate, no lifting • 360° TURN IN WATER: Easy and fast inspection
- Uni-quick ratchet type adapter adjusts from 15" dia. to 52" dia. and instantly lifts up to 400 lb. RVs to super singles
- Optional inner tube adapter allows you to check tubes up to 50" in diameter



517-00039



517-00055

**SPACE  
SAVING  
DESIGN**
**ONE-MAN  
OPERATION**

| ASCOT NO. | MFG. NO. | DESCRIPTION                                                                   |
|-----------|----------|-------------------------------------------------------------------------------|
| 517-00100 | 100TTD   | E-Z Dunk Truck Tire Dunker, Range 15" - 50" Diameter                          |
| 517-00039 | 39ED     | 39" Dia. x 24" Depth Passenger & RV Tube & Tire Dunker with Polyethylene Tank |
| 517-00055 | 55T      | T & G 55" Dia. x 24" Depth Truck & Grader Tube Dunker with Polyethylene Tank  |

## EZ-110D TRUCK TIRE DUNKER W/LIFT

- One man operation • Picks up tire in and out of water • Adapter for 8 - 10 hole wheels • 55" x 24" Poly tub • Optional Inner tube/tire spider available
- Submerges entire tire under water
- Can rotate under water for easy marking



517-11033

| ASCOT NO. | MFG. NO. | DESCRIPTION                      |
|-----------|----------|----------------------------------|
| 517-11033 | EZ-110D  | EZ-110D Truck Tire Dunker w/Lift |

**Branick**

## ALL PURPOSE "EF" FULL CIRCLE TIRE SPREADER

- Expose tire defects immediately! • Bead Diameter minimum 13.5", maximum 25.5" • Cross Sections minimum 5", maximum 21.5" • Revolve the tire 360° for inspection, repair and buffing or installing tubes, flaps and air bags inside curing rims • Maximum operating pressure of 150 PSI • Air-operated lift raises tire to inspection position

**QUICKLY  
EXPOSES TIRE  
DEFECTS**
**REVOLVES  
THE TIRE 360°**


602-60210

| ASCOT NO. | MFG. NO. | DESCRIPTION                           |
|-----------|----------|---------------------------------------|
| 602-60210 | EF       | All Purpose Full Circle Tire Spreader |

**Branick**

## HEAVY DUTY "EF/HD" FULL CIRCLE TIRE SPREADER

- Designed to lift and spread truck, bus, tractor and some aircraft tires 14" thru 24", 20-ply, including steel radial tires
- Revolves 360°, while spread, for easy excellent inspection
- Conveniently located floor-mount controls
- Diameter arms easily slide into position to hold inner beads before spreading

602-60211



| ASCOT NO. | MFG. NO. | DESCRIPTION                          |
|-----------|----------|--------------------------------------|
| 602-60211 | EF-HD    | Heavy Duty Full Circle Tire Spreader |

## INVERTING TIRE SPREADER/REPAIR STATION

- Spreads and inverts passenger, truck and bus tires with ease for inspection and repair
- Foot control valve conveniently located at base of machine
- Adjustable lamp swings in and out of tire

604-05120



| ASCOT NO. | MFG. NO. | DESCRIPTION                            |
|-----------|----------|----------------------------------------|
| 604-05120 | 5120     | Inverting Tire Spreader/Repair Station |

## PASSENGER/LIGHT TRUCK TIRE SPREADER

- Handles passenger and light truck tires up to 20"
- Controlled tension release to avoid snap-back on tough sidewalls
- Easily rotate the tire to locate the repair point
- Quick and easy spread of tire and reduced footprint

604-05045



| ASCOT NO. | MFG. NO. | DESCRIPTION                         |
|-----------|----------|-------------------------------------|
| 604-05045 | 5045     | Passenger/Light Truck Tire Spreader |

## PASSENGER, LIGHT TRUCK AND COMMERCIAL TRUCK TIRE SPREADER

- Handles everything from passenger to super-single truck tires
- Adjustable height and a tire ramp
- Lifts 35" off the ground
- Manual rotation with a tool tray that swivels left and right

604-05500



| ASCOT NO. | MFG. NO. | DESCRIPTION                                         |
|-----------|----------|-----------------------------------------------------|
| 604-05500 | 5500     | Passenger, Light Truck and Commercial Tire Spreader |

## Tire Spreaders & Repair Stations (cont.)

### AIR OPERATED TIRE SPREADER

- For passenger/RV/light truck tires
- Wide platform gives stable work surface
- Adjustable light



603-00275

### AUTOMATIC TRUCK TIRE SPREADER

- Air lift allows operator to lift without lifting the tire/wheel
- Heavy gauge steel construction
- Work light included
- Air regulator/lubricator included



603-00825

### FLOOR MOUNT ADJUSTABLE TIRE SPREADER

- Provides easy access for repairing passenger and light truck tires
- The adjustable tire spreader can accommodate all tires from garden service through light truck
- The Tire Spreader has a foot-control swivel, tilts, and is equipped with a tool tray and a floor stand base-plate



604-01275

| ASCOT NO. | MFG. NO. | DESCRIPTION                |
|-----------|----------|----------------------------|
| 603-00275 | BJ-S275  | Air Operated Tire Spreader |

| ASCOT NO. | MFG. NO. | DESCRIPTION                   |
|-----------|----------|-------------------------------|
| 603-00825 | BJ-S825  | Automatic Truck Tire Spreader |

| ASCOT NO. | MFG. NO. | DESCRIPTION |
|-----------|----------|-------------|
|-----------|----------|-------------|

| AIR OPERATED TIRE SPREADER PARTS & ACCESSORIES |     |                         |
|------------------------------------------------|-----|-------------------------|
| 603-40200                                      | 402 | Cylinder                |
| 603-42400                                      | 424 | Step Valve              |
| 603-43700                                      | 437 | Working Light           |
| 603-44000                                      | 440 | Transformer             |
| 603-44300                                      | 443 | Power Line              |
| 603-44700                                      | 447 | Oil-Water Separator     |
| 603-52000                                      | 520 | Metal Speediness Tie-In |
| 603-52800                                      | 528 | Y-Windtight Ring        |
| 603-52900                                      | 529 | O-Windtight Ring        |
| 603-53100                                      | 531 | Dustproof Ring          |
| 603-53400                                      | 534 | Safety Valve            |
| 603-53500                                      | 535 | Silencer                |

| ASCOT NO. | MFG. NO. | DESCRIPTION |
|-----------|----------|-------------|
|-----------|----------|-------------|

| AUTOMATIC TRUCK TIRE SPREADER PARTS & ACCESSORIES |     |                       |
|---------------------------------------------------|-----|-----------------------|
| 603-82501                                         | 658 | Handle Valve          |
| 603-82502                                         | 650 | Air Regulator         |
| 603-82503                                         | 711 | O-Ring                |
| 603-82504                                         | 712 | Washer                |
| 603-82505                                         | 715 | Dustproof Seal        |
| 603-82506                                         | 720 | Right Angle Connector |
| 603-82507                                         | 728 | Middle Union          |
| 603-82508                                         | 730 | Middle Union          |
| 603-82509                                         | 733 | Straight Union        |
| 603-82510                                         | 736 | Rubber O-Ring         |
| 603-82511                                         | 737 | Oil-Free Piston       |

| ASCOT NO. | MFG. NO. | DESCRIPTION                          |
|-----------|----------|--------------------------------------|
| 604-01275 | BJ-275B  | Floor Mount Adjustable Tire Spreader |

| ASCOT NO. | MFG. NO. | DESCRIPTION |
|-----------|----------|-------------|
|-----------|----------|-------------|

| FLOOR MOUNT ADJUSTABLE TIRE SPREADER PARTS & ACCESSORIES |     |                 |
|----------------------------------------------------------|-----|-----------------|
| 604-10300                                                | 103 | Spread Hook Set |
| 604-10900                                                | 109 | Roller Sets     |
| 604-11000                                                | 110 | Spread Hook Set |
| 604-11900                                                | 119 | Foot Board      |
| 604-12700                                                | 127 | Rubber Cover    |



### ADJUSTABLE CENTER-POST TIRE SPREADER

- Easy to use • Durable • Adjustable from 0" to 10"




602-08028

| ASCOT NO. | DESCRIPTION                          |
|-----------|--------------------------------------|
| 602-08028 | Adjustable Center-Post Tire Spreader |

### MANUAL TIRE SPREADER

- Lightweight and easy to use
- Special locking pin for safety
- Made from durable materials
- Locks both beads open for easy tire inspection and repair

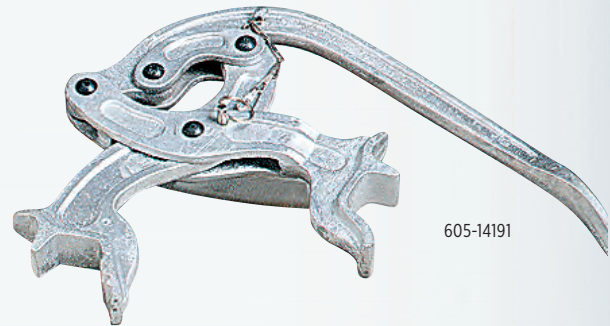

605-14191

| ASCOT NO. | MFG. NO. | DESCRIPTION          |
|-----------|----------|----------------------|
| 605-14191 | MS-1     | Manual Tire Spreader |



### TIRE SPREADER

- Simple tool designed to quickly make tire repairs easy
- Ideal for mobile service



605-00101

| ASCOT NO. | MFG. NO. | DESCRIPTION   |
|-----------|----------|---------------|
| 605-00101 | GTS-01   | Tire Spreader |

### MANUAL TIRE SPREADERS

- For large truck tires
- Used in pairs
- Spreads tires up to 17" span
- Spreading power of a car jack
- Heavy duty construction
- Weight: 4-1/4 Lbs.



605-31554

| ASCOT NO. | MFG. NO. | DESCRIPTION          |
|-----------|----------|----------------------|
| 605-31554 | T54      | Manual Tire Spreader |

# Cabinets & Storage

## HEAVY DUTY TIRE REPAIR CABINET

Features sliding storage drawers with rollers.

- SIZE: 19.6" x 10" x 26"
- 2 shelves inside (3 storage levels)
- 2 tool hook sets on two inside doors
- 2 sliding storage drawers with rollers
- Switch-to-open handle
- Optional shelf available
- WEIGHT: 36 lbs.



719-12001

| ASCOT NO. | MFG. NO.       | DESCRIPTION                            |
|-----------|----------------|----------------------------------------|
| 719-12001 | TBG-WC12001    | Heavy Duty Tire Repair Cabinet         |
| 719-12011 | TBG-WC12001-01 | Optional Shelf for Tire Repair Cabinet |

## 18-DRAWER METAL STORAGE CABINET

- CABINET SIZE: 33-3/4" (W) x 11-3/4" (D) x 10-3/4" (H)
- DRAWER SIZE: 4-7/8" (W) x 11-1/4" (D) x 2-3/4" (H)
- Modular drawer design for efficiency and organization
- Heavy-duty, welded steel construction provides strength and stability
- Drawers feature stoppers to prevent accidental pulling or spilling
- Full-width handles and easy glide runners
- Shipped fully assembled and ready to use
- WEIGHT: 45 lbs.




719-00018

| ASCOT NO. | MFG. NO. | DESCRIPTION                     |
|-----------|----------|---------------------------------|
| 719-00018 | 18D      | 18-Drawer Metal Storage Cabinet |

## 32-BIN METAL STORAGE CABINET

- CABINET SIZE: 33-3/4" (W) x 8-1/2" (D) x 19-1/4" (H)
- DRAWER SIZE: 4" (W) x 8-3/8" (D) x 4-1/2" (H)
- Keeps your tools and accessories organized and accessible
- Heavy-duty, welded steel construction provides strength and stability
- Hemmed bin fronts for retaining parts
- Mounting holes located in the top and bottom
- Shipped fully assembled and ready to use
- WEIGHT: 37 lbs.

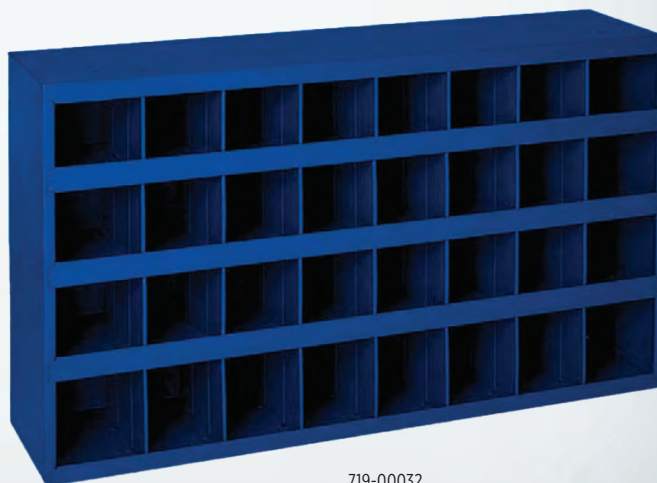

719-00032

| ASCOT NO. | MFG. NO. | DESCRIPTION                  |
|-----------|----------|------------------------------|
| 719-00032 | 32B      | 32-Bin Metal Storage Cabinet |

*\*Actual product appearance may vary*